


CAUTION

**PLEASE CONTACT CURRY
SUPPLY COMPANY BEFORE
ATTEMPTING ANY CHANGES TO
THE ELECTRICAL SYSTEMS.
DOING SO MAY CAUSE
EQUIPMENT DAMAGE OR VOID
WARRANTY.**

Table of Contents

2187-1001 Rev0 Bed Harness WD 1 of 4	3
2187-1001 Rev0 Bed Harness WD 2 of 4	4
2187-1001 Rev0 Bed Harness WD 3 of 4	5
2187-1001 Rev0 Bed Harness WD 4 of 4	6
2187-1002 Rev0 Rail Light Harness WD 1 of 3	7
2187-1002 Rev0 Rail Light Harness WD 2 of 3	8
2187-1002 Rev0 Rail Light Harness WD 3 of 3	9
2187-1012 Rev0 AWP Flatbed Cab Harness 1 of 2	10
2187-1012 Rev0 AWP Flatbed Cab Harness 2 of 2	11
2187-1013 Rev2 AWP Flatbed Rail Harness Driver Side 1 of 2	12
2187-1013 Rev2 AWP Flatbed Rail Harness Driver Side 2 of 2	13
2187-1015 Rev4 AWP Flatbed Chassis Harness 1 of 3	14
2187-1015 Rev4 AWP Flatbed Chassis Harness 2 of 3	15
2187-1015 Rev4 AWP Flatbed Chassis Harness 3 of 3	16
2187-1015 Rev3 AWP Flatbed Chassis Harness 2 of 3	17
2187-1015 Rev3 AWP Flatbed Chassis Harness 3 of 3	18
2187-1015 Rev2 AWP Flatbed Chassis Harness 2 of 3	19
2187-1015 Rev2 AWP Flatbed Chassis Harness 3 of 3	20
2187-1015 Rev1 AWP Flatbed Chassis Harness 2 of 3	21
2187-1015 Rev1 AWP Flatbed Chassis Harness 3 of 3	22
2187-1016 Rev2 2FT Extension Marker 1 of 2	23
2187-1016 Rev2 2FT Extension Marker 2 of 2	24
2187-1016 Rev1 2FT Extension Marker 1 of 2	25
2187-1016 Rev1 2FT Extension Marker 2 of 2	26
2187-1016 Rev0 2FT Extension Marker 1 of 2	27
2187-1016 Rev0 2FT Extension Marker 2 of 2	28
2187-1019 RevB 22FT Flatbed Marker Light Harness 1 of 2	29
2187-1019 RevB 22FT Flatbed Marker Light Harness 2 of 2	30
2187-1039 Rev0 16FT Flatbed Marker Light Harness 1 of 2	31
2187-1039 Rev0 16FT Flatbed Marker Light Harness 2 of 2	32
1744-77000 Rev2 Flatbed Side Stake 1 of 3	33
1744-77000 Rev2 Flatbed Side Stake 2 of 3	34
1744-77000 Rev2 Flatbed Side Stake 3 of 3	35
2187-1002 Rev0 PODs Rail Light Harness (2022 & Later) 1 of 3	36
2187-1002 Rev0 PODs Rail Light Harness (2022 & Later) 2 of 3	37
2187-1002 Rev0 PODs Rail Light Harness (2022 & Later) 3 of 3	38
2187-1003 Rev0 PODs Cab Harness (2022 & Later) 1 of 2	39
2187-1003 Rev0 PODs Cab Harness (2022 & Later) 2 of 2	40
2187-1080 Rev0 PODs Chassis Harness (2022 & Later) 1 of 4	41
2187-1080 Rev0 PODs Chassis Harness (2022 & Later) 2 of 4	42
2187-1080 Rev0 PODs Chassis Harness (2022 & Later) 3 of 4	43
2187-1080 Rev0 PODs Chassis Harness (2022 & Later) 4 of 4	44
1630-3400 Rev0 PODs Harness (2021 & Earlier) 1 of 9	45
1630-3400 Rev0 PODs Harness (2021 & Earlier) 2 of 9	46
1630-3400 Rev0 PODs Harness (2021 & Earlier) 3 of 9	47
1630-3400 Rev0 PODs Harness (2021 & Earlier) 4 of 9	48
1630-3400 Rev0 PODs Harness (2021 & Earlier) 5 of 9	49
1630-3400 Rev0 PODs Harness (2021 & Earlier) 6 of 9	50
1630-3400 Rev0 PODs Harness (2021 & Earlier) 7 of 9	51
1630-3400 Rev0 PODs Harness (2021 & Earlier) 8 of 9	52
1630-3400 Rev0 PODs Harness (2021 & Earlier) 9 of 9	53

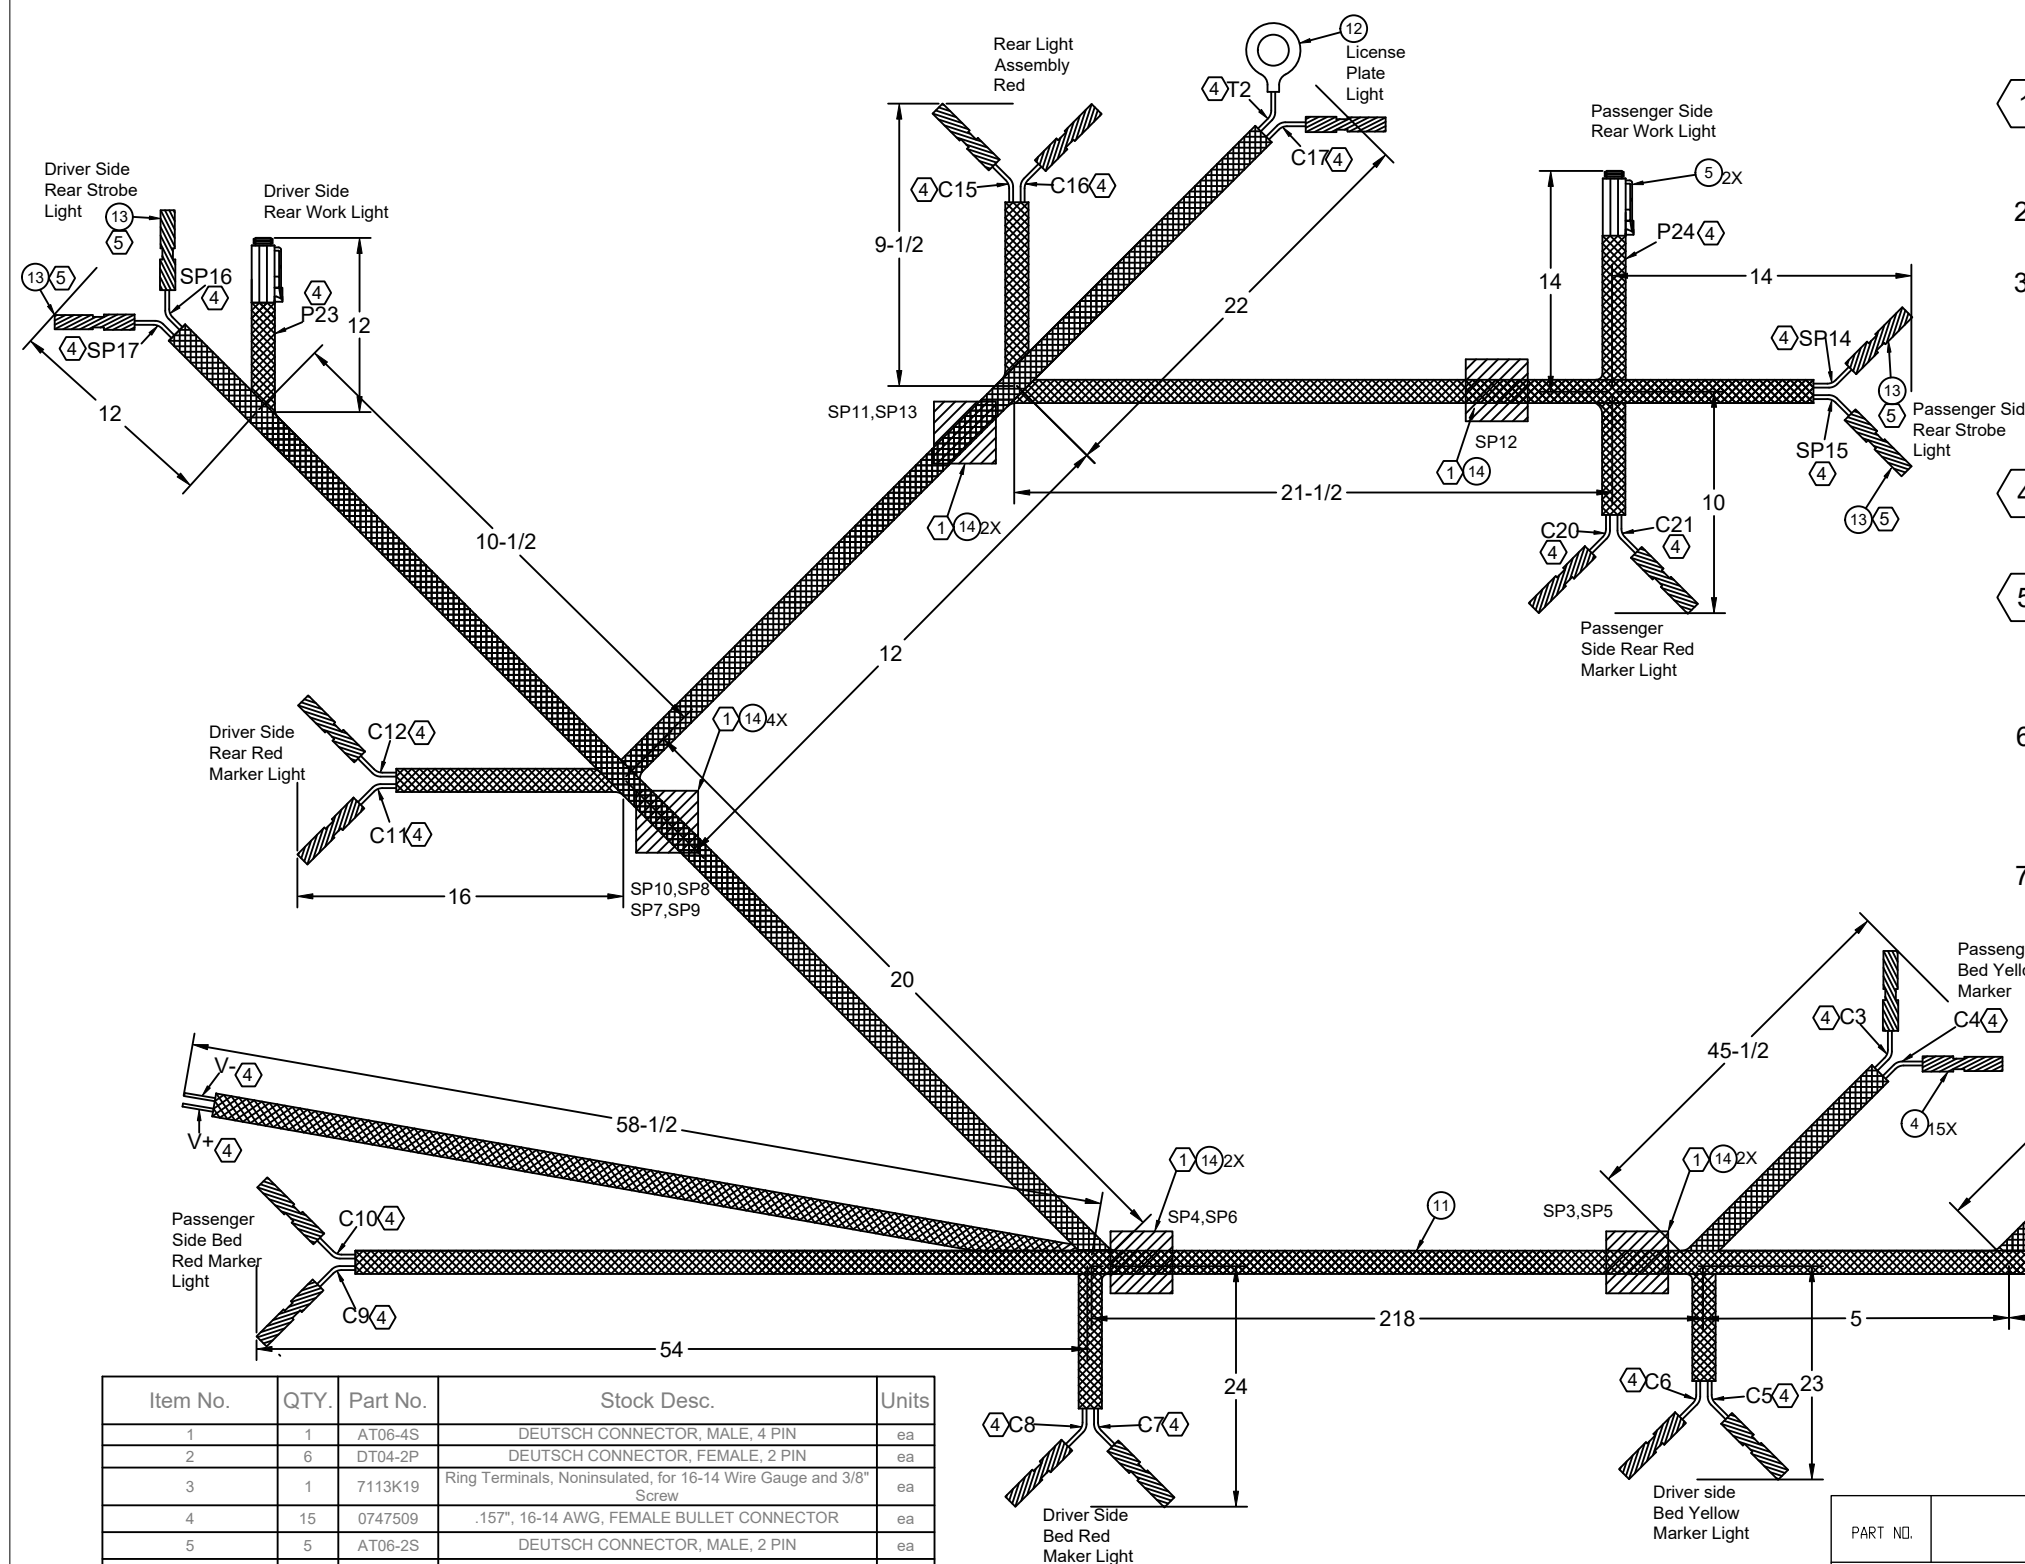

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620
- 1 SPlicing WIRES SHALL BE DONE
AN 1-1/2 BEFORE BREAKING OUT THE HARNESS
 2. ITEM NO. 6-10,14 NOT SHOWN IN ASSEMBLY
 3. ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE
ALTERNATE PART
PROVIDES THE SAME FORM FIT AND FUNCTION. IF
UNSURE PLEASE CONTACT
CURRY SUPPLY ENGINEERING
 - 4 PLACE LABELS WITH THE FOLLOWING CALLOUTS
THAT POINTS TO EACH COMPONENT
 - 5 WHEN PLACING ITEM NO. 13 ON THE HARNESS, ONLY
THE 16-14 END SHALL BE CRIMPED ON THE 14 AWG
WIRE. DO NOT CRIMP THE 22-18 AWG SIDE
 - 6 FOLLOW GUIDLINES/RECOMMENDATION OF
MANUFACTURE WHEN INSTALLING EACH PLUG, JACK,
SPLICE, CONNECTOR, AND TERMINAL
 - 7 SHRINK ITEM NO. 14 OVER TOP EACH SPLICE THAT IS
MADE


Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	AT06-4S	DEUTSCH CONNECTOR, MALE, 4 PIN	ea
2	6	DT04-2P	DEUTSCH CONNECTOR, FEMALE, 2 PIN	ea
3	1	7113K19	Ring Terminals, Noninsulated, for 16-14 Wire Gauge and 3/8" Screw	ea
4	15	0747509	.157", 16-14 AWG, FEMALE BULLET CONNECTOR	ea
5	5	AT06-2S	DEUTSCH CONNECTOR, MALE, 2 PIN	ea
6	780	99605565	14 GAUGE WHITE WIRE	in
7	400	5121816	14 GAUGE BLUE WIRE	in
8	36	0702131	14 GAUGE BLACK WIRE	in
9	550	5121819	14 GAUGE BROWN WIRE	in
10	375	0762648	14 GAUGE RED WIRE	in
11	680	9284K613	Expando-3/8 Expandable Sleeveing	in
12	1	7113K13	Ring Terminals, Noninsulated, for 16-14 Wire Gauge and 1/4" Screw	ea
SP14,SP15,SP16,SP17	4	716043	22-18 to 16-14 AWG SPLICE REDUCER	ea
SP1,SP2,SP5,SP7,SP8,SP9,SP11,SP12,SP13	9	34318	TE CONNECT PARALLEL SPLICES 8AWG	ea
SP3,SP4,SP6,SP10	4	34319	TE CONNECT PARALLEL SPLICES 6AWG	ea
14	27	749243	FASTENAL 8AWG-6AWG SHRINK TUBE W/ ADHESIVE	in


PART NO.	NAME	DATE
	L.STEWARD	2/17/2022
TOLERANCES: UNLESS OTHERWISE SPECIFIED:	DRAWN BY:	J.SCHULTZ
FRACTIONAL: ± 1/2"	MATERIAL	
ANGULAR: ± 1°	PROCESS	
TWO PLACE DECIMAL ± .01"	THICKNESS	
THREE PLACE DECIMAL ± .005"	UNITS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.	SCALE	NTS




Curry Supply Co.

TITLE: BED HARNESS/WD		
SIZE	DRAWING NO. 2187-1001	REV 0
WEIGHT:		SHEET 1 OF 2

4

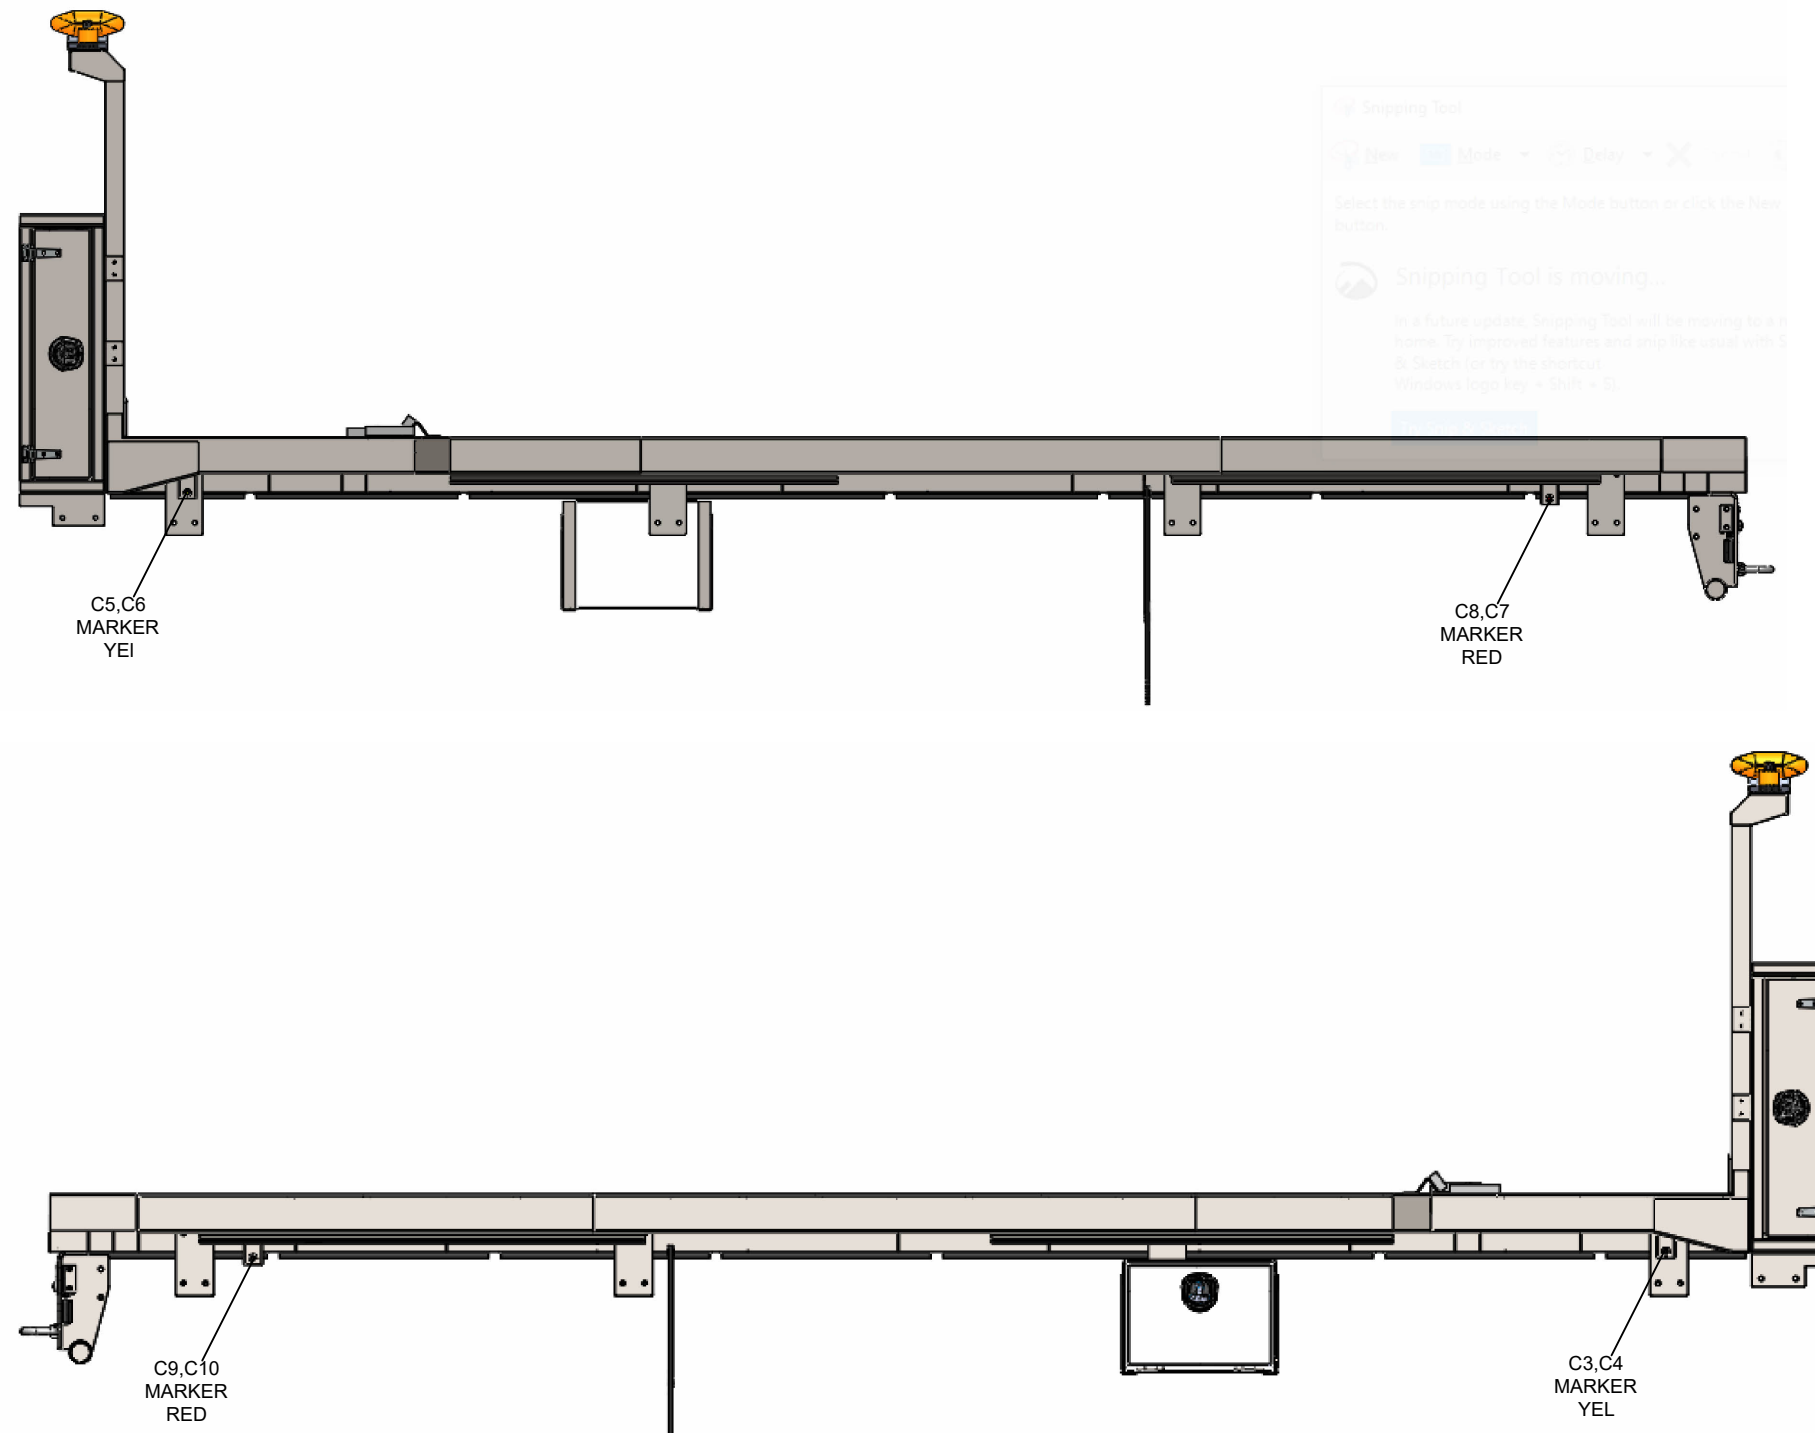


PART NO.		NAME		DATE		 Curry Supply Co.					
TOLERANCES: UNLESS OTHERWISE SPECIFIED:		MODEL BY: L.STEWARD		2/17/2022							
		DRAWN BY: J.SCHULTZ		2/17/2022							
		MATERIAL									
FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		PROCESS				TITLE: BED HARNESS/WD					
		THICKNESS									
		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS				SIZE DRAWING NO. 2187-1001		REV	
SCALE				NTS							
								WEIGHT:		SHEET 2 OF 2	

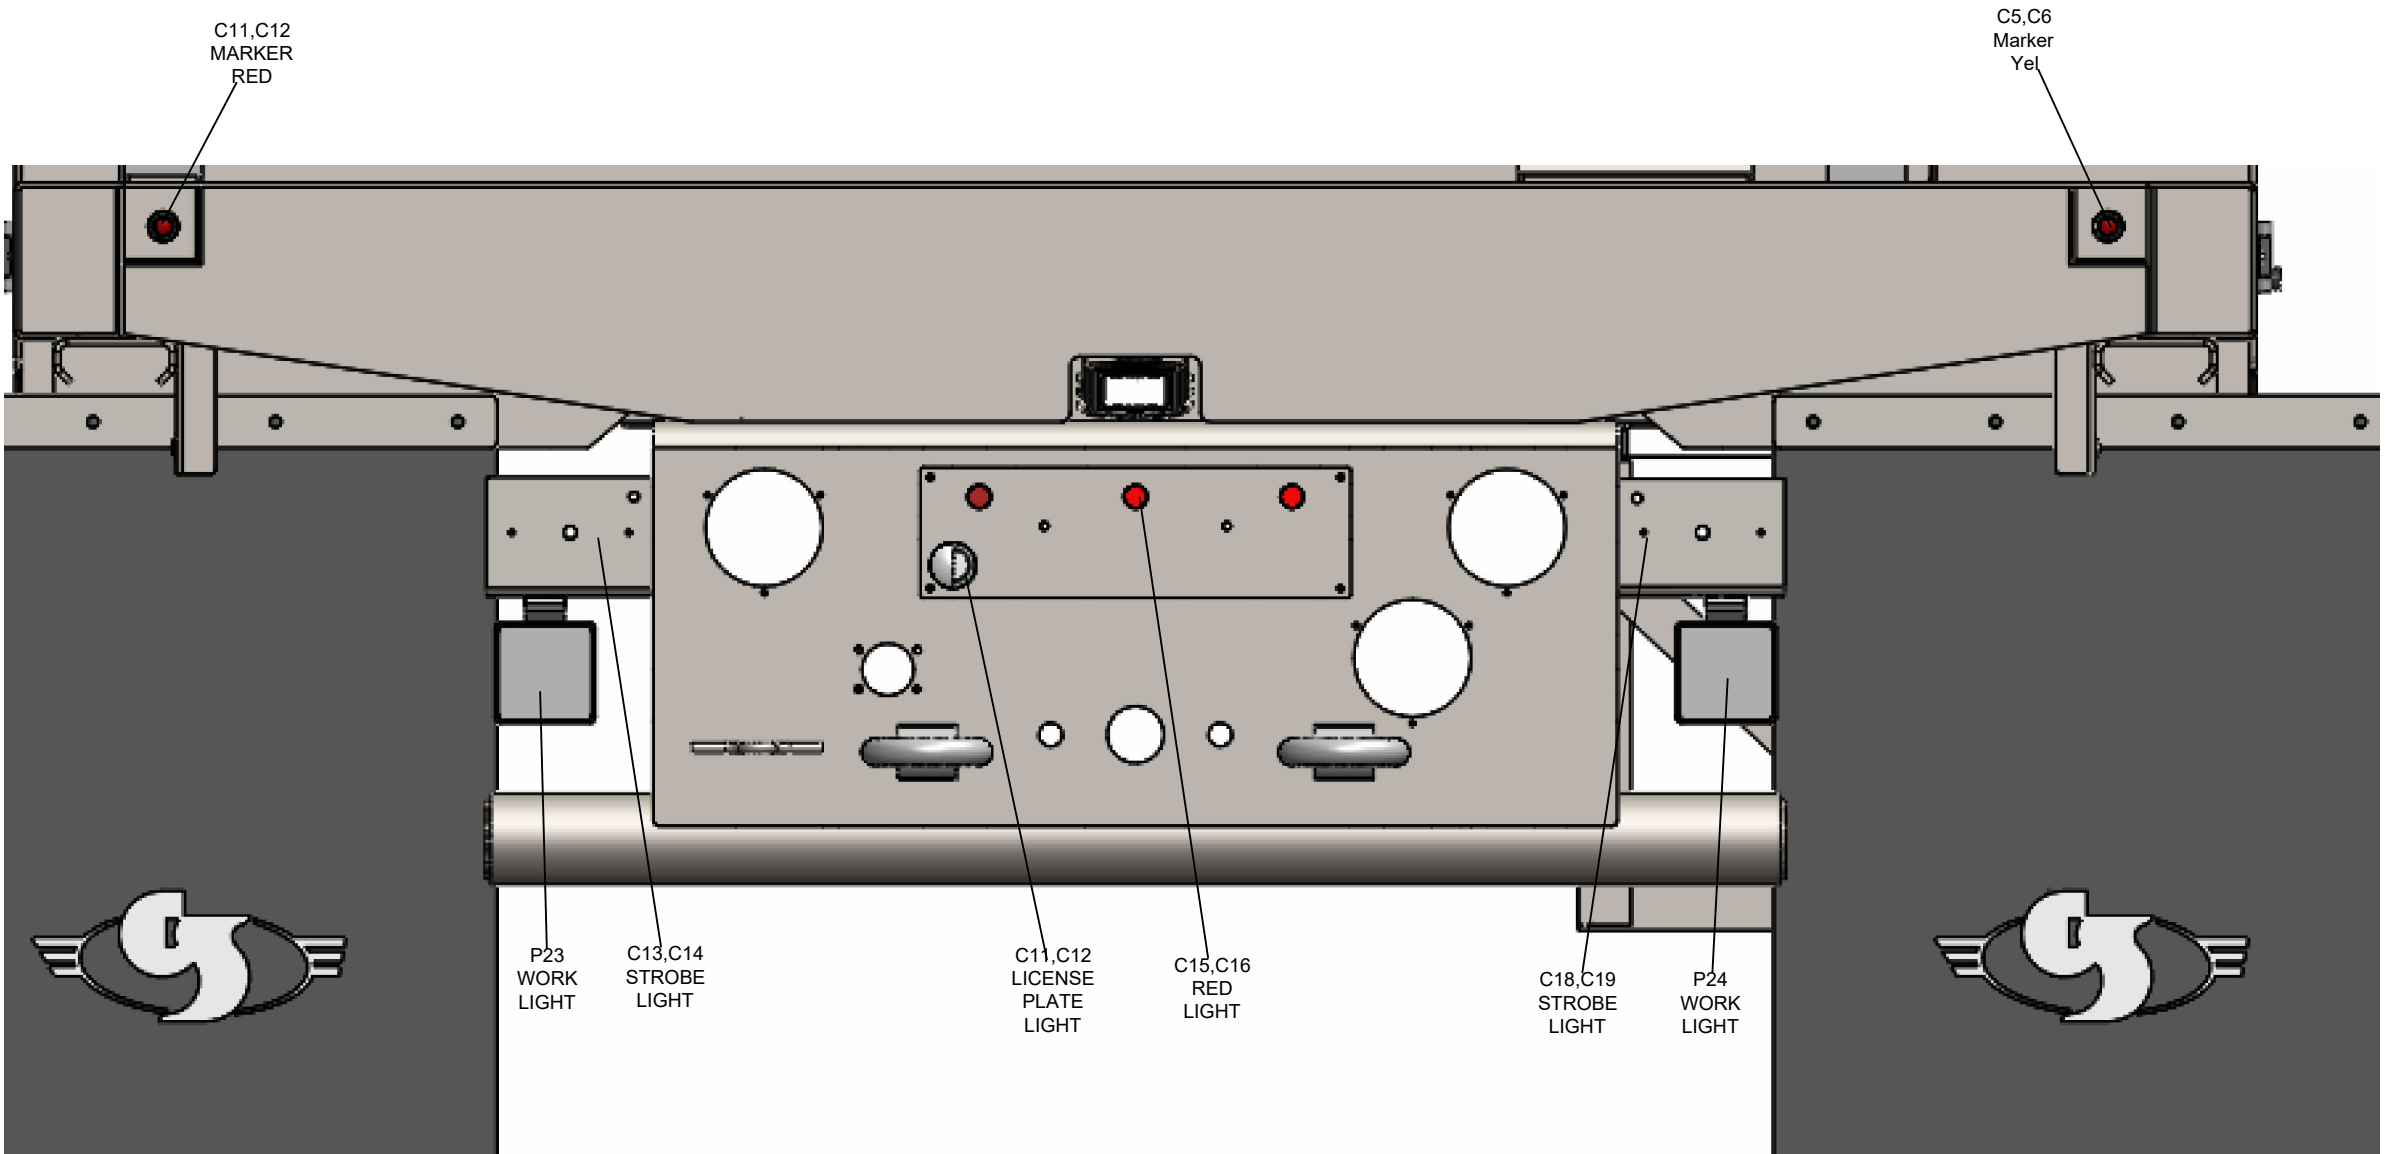

PART NO.		NAME		DATE							
		MODEL BY: L.STEWARD		2/17/2022							
		DRAWN BY: J.SCHULTZ		2/17/2022							
		MATERIAL									
		PROCESS									
TOLERANCES:						TITLE: BED HARNESS/WD					
UNLESS OTHERWISE SPECIFIED:											
FRACTIONAL: ± 1/2"											
ANGULAR: ± 1°											
TWO PLACE DECIMAL ±.01"											
THREE PLACE DECIMAL ±.005"		THICKNESS									
PROPRIETARY AND CONFIDENTIAL		UNITS				SIZE		DRAWING NO.		REV	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		SCALE NTS						2187-1001			
								WEIGHT:		SHEET 2 OF 2	


Item No.	QTY.	Part No.	Stock Desc.	Units
1	4	AT06-2S	DEUTSCH CONNECTOR, MALE, 2 PIN	ea
2	3	DT04-2P	DEUTSCH CONNECTOR, FEMALE, 2 PIN	ea
3	185	99605565	14 GAUGE WHITE WIRE	in
4	135	5121816	14 GAUGE BLUE WIRE	in
5	135	0702131	14 GAUGE BLACK WIRE	in
6	126	9284K613	Expando-3/8 Expandable Sleeving	in
SP18,SP19, SP21,SP22	4	34318	TE CONNECT PARALLEL SPLICES 8AWG	ea
SP20	1	34319	TE CONNECT PARALLEL SPLICES 6AWG	ea
7	10	749243	FASTENAL 8AWG-6AWG SHRINK TUBE W/ ADHESIVE	in

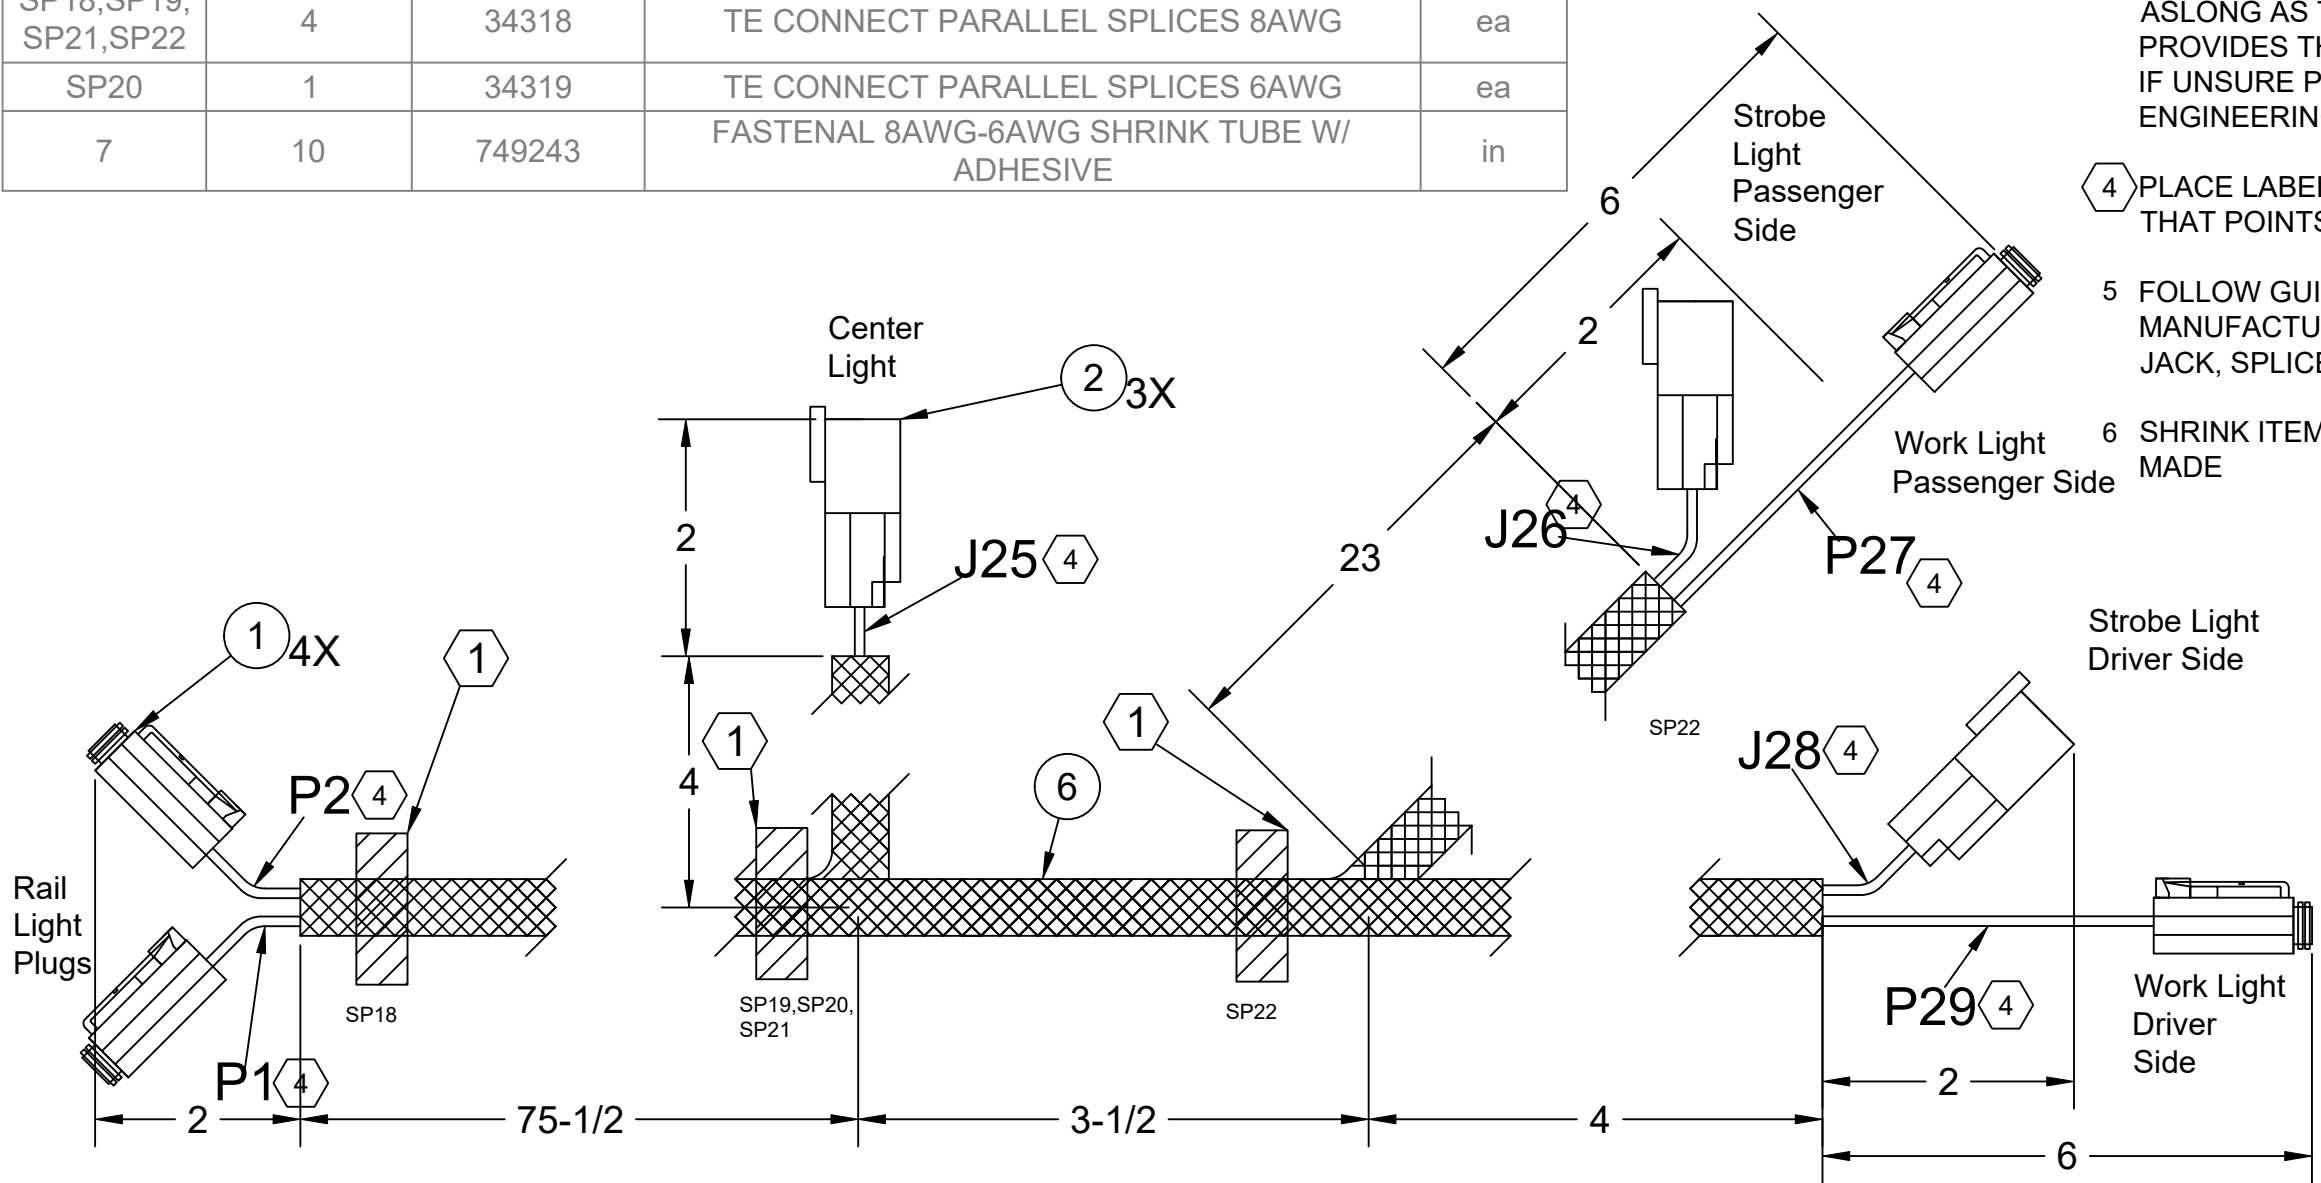

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE
WITH IPC-620
- 1 SPlicing WIRES SHALL BE DONE
AN 1-1/2 BEFORE BREAKING OUT THE HARNESS
2. ITEM NO. 3,4,5 NOT SHOWN IN ASSEMBLY
3. ALTERNATE PART NO. ARE ALLOWED
ASLONG AS THE ALTERNATE PART
PROVIDES THE SAME FORM FIT AND FUNCTION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY
ENGINEERING
- 4 PLACE LABELS WITH THE FOLLOWING CALLOUTS
THAT POINTS TO EACH COMPONENT
- 5 FOLLOW GUIDLINES/RECOMMENDATION OF
MANUFACTURE WHEN INSTALLING EACH PLUG,
JACK, SPLICE, CONNECTOR, AND TERMINAL
- 6 SHRINK ITEM NO. 7 OVER TOP EACH SPLICE THAT IS
MADE


PART NO.		NAME	DATE
MODEL BY:	L.STEWART	2/17/2022	
DRAWN BY:	J.SCHULTZ	2/17/2022	
TOLERANCES: UNLESS OTHERWISE SPECIFIED:	MATERIAL		
FRACTIONAL: ± 1/2"	PROCESS		
ANGULAR: ± 1°	THICKNESS		
TWO PLACE DECIMAL ± .01"			
THREE PLACE DECIMAL ± .005"			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.	UNITS		
SCALE	NTS		

			
TITLE: RAIL LIGHT HARNESS/WD			
SIZE	DRAWING NO. 2187-1002	REV 0	
WEIGHT:		SHEET 1 OF 2	

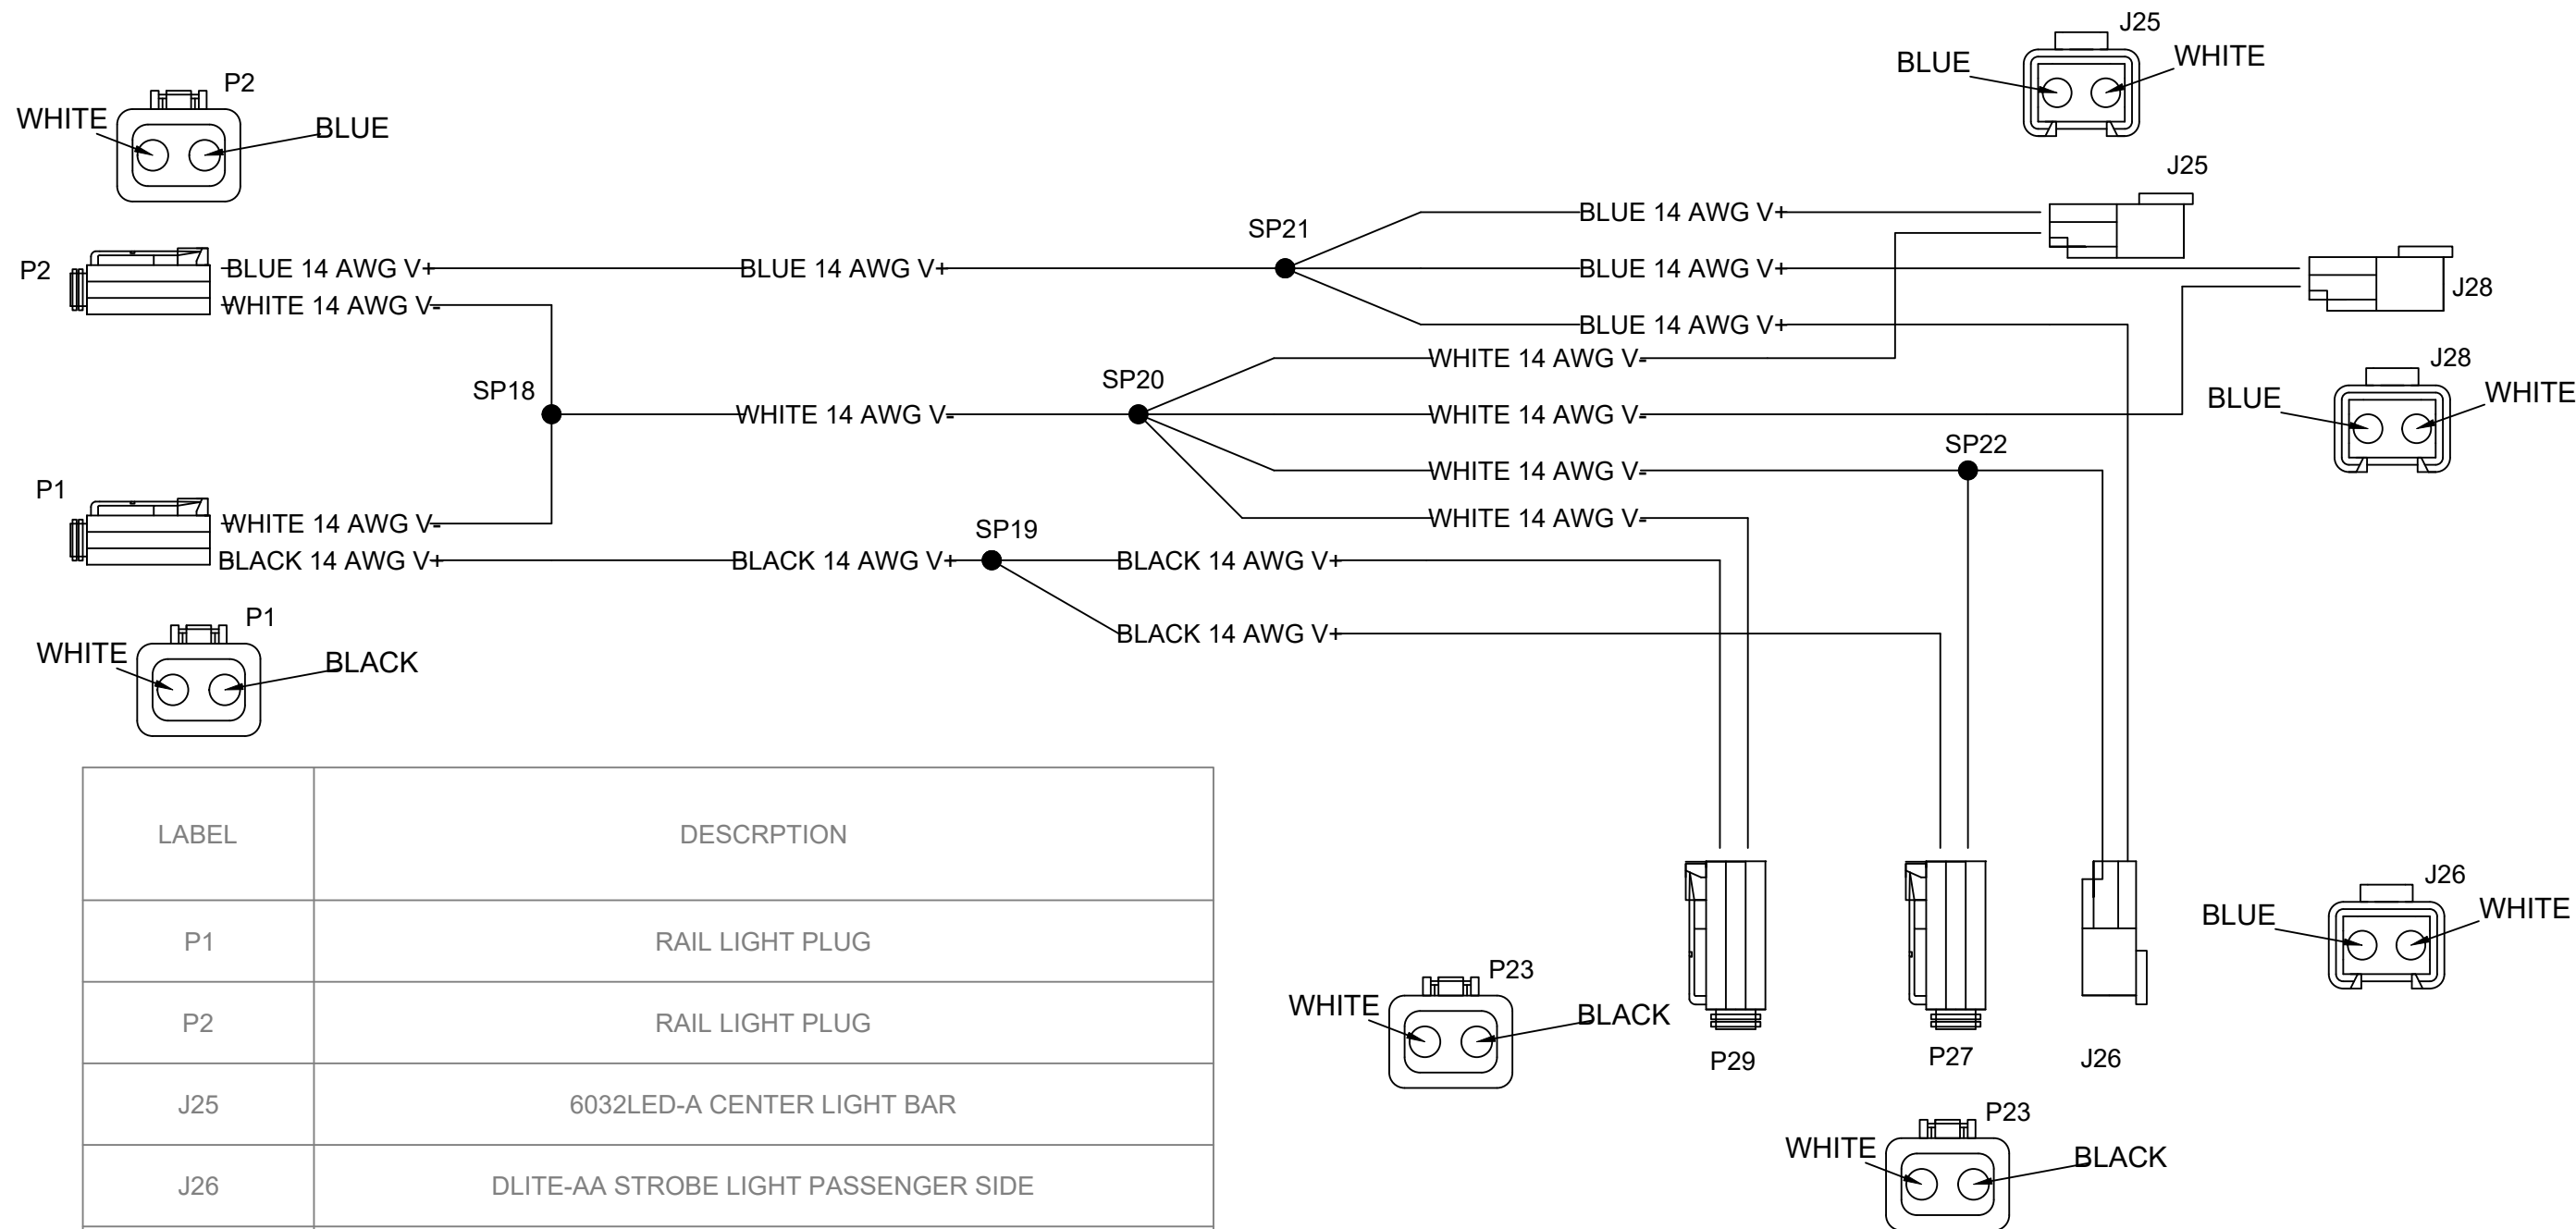


LABEL	DESCRIPTION
P1	RAIL LIGHT PLUG
P2	RAIL LIGHT PLUG
J25	6032LED-A CENTER LIGHT BAR
J26	DLITE-AA STROBE LIGHT PASSENGER SIDE
P27	LED-135CS PASSENGER SIDE WORK LIGHT
J28	DLITE-AA STROBE LIGHT DRIVER SIDE
P29	LED-135CS DRIVER SIDE WORK LIGHT

PART NO.		NAME		DATE					
		MODEL BY: L.STEWARD		2/17/2022					
TOLERANCES: UNLESS OTHERWISE SPECIFIED:		DRAWN BY: J.SCHULTZ		2/17/2022		TITLE: RAIL LIGHT HARNESS/WD			
		MATERIAL							
FRACTIONAL: ± 1/2"		PROCESS				SIZE: DRAWING NO. 2187-1002 REV			
ANGULAR: ± 1°		THICKNESS							
TWO PLACE DECIMAL ±.01"		UNITS				WEIGHT: SHEET 2 OF 2			
THREE PLACE DECIMAL ±.005"		SCALE NTS							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.									

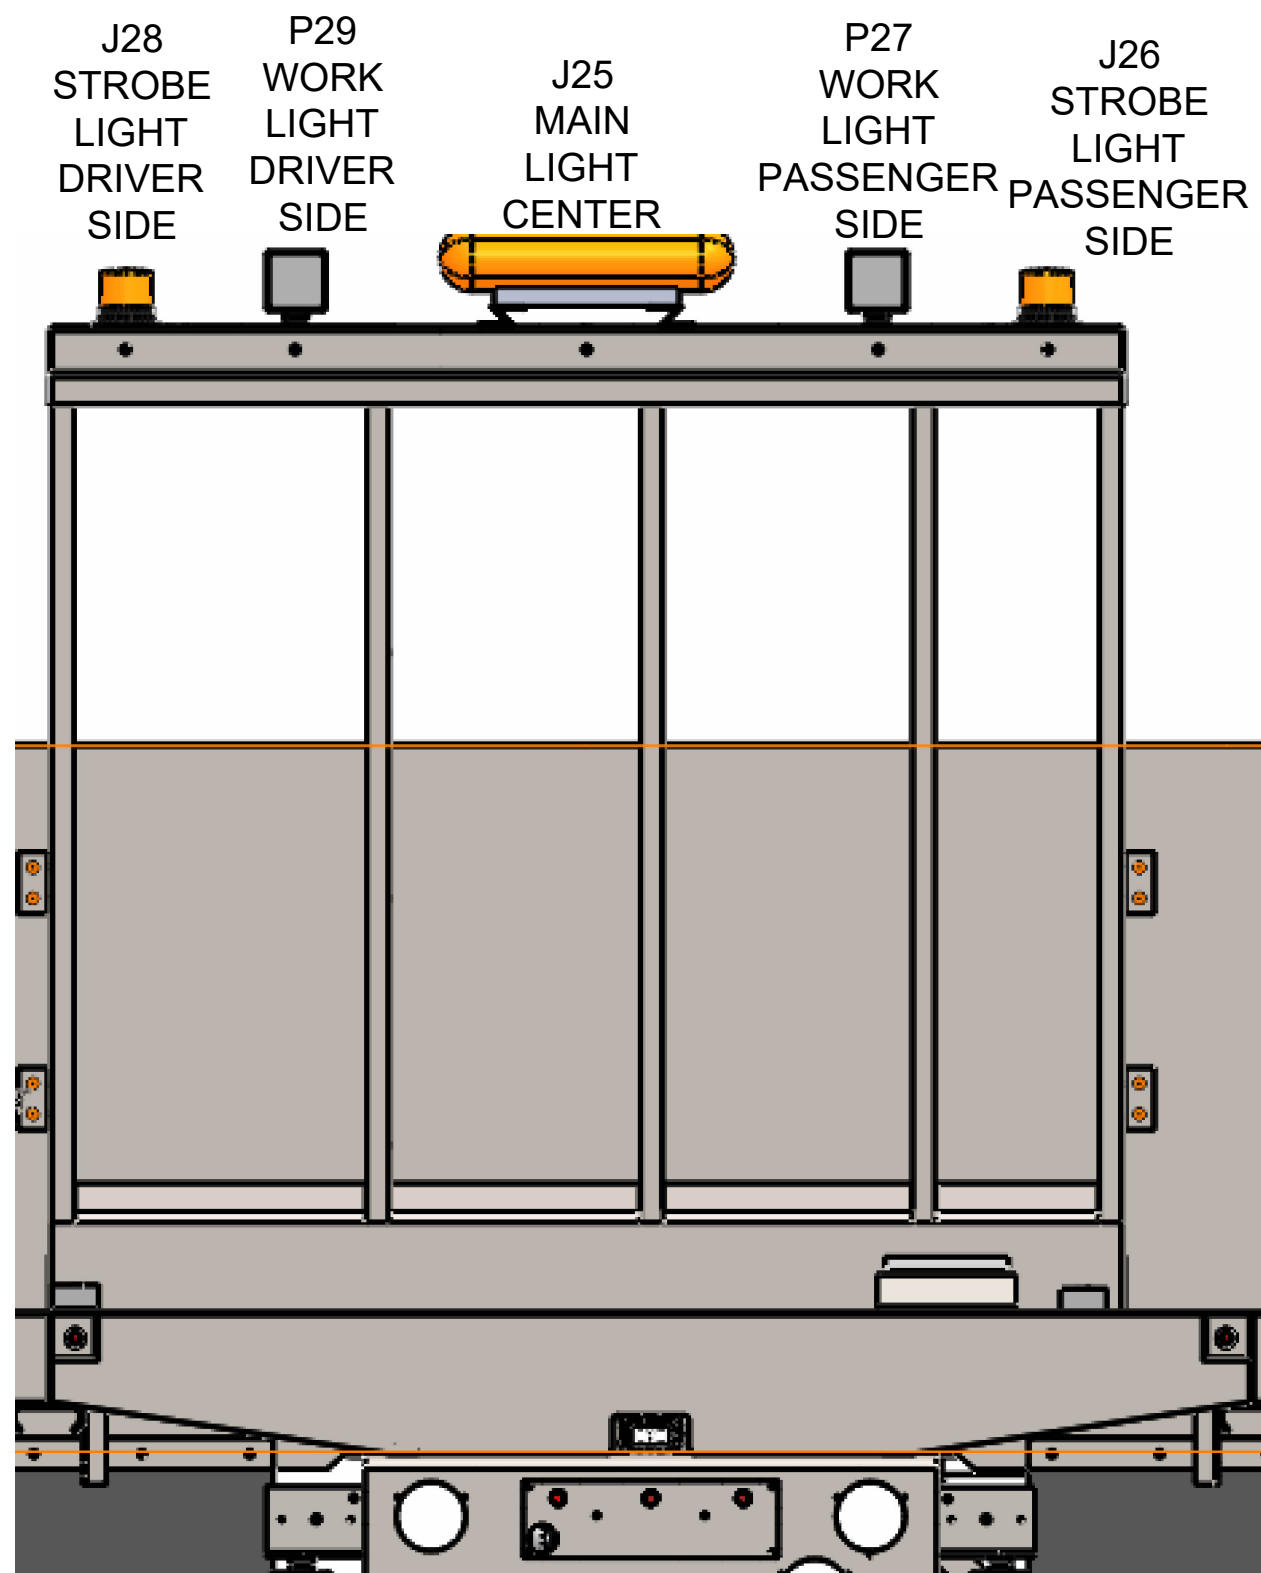


PART NO.	NAME		DATE							
	MODEL BY:	L.STEWARD	2/17/2022							
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"	DRAWN BY:		J.SCHULTZ		2/17/2022					
	MATERIAL									
	PROCESS									
	THICKNESS									
	TITLE:					RAIL LIGHT HARNESS/WD				
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.			UNITS		SIZE		DRAWING NO.		REV	
			SCALE		NTS		2187-1002			
					WEIGHT:		SHEET 2 OF 2			

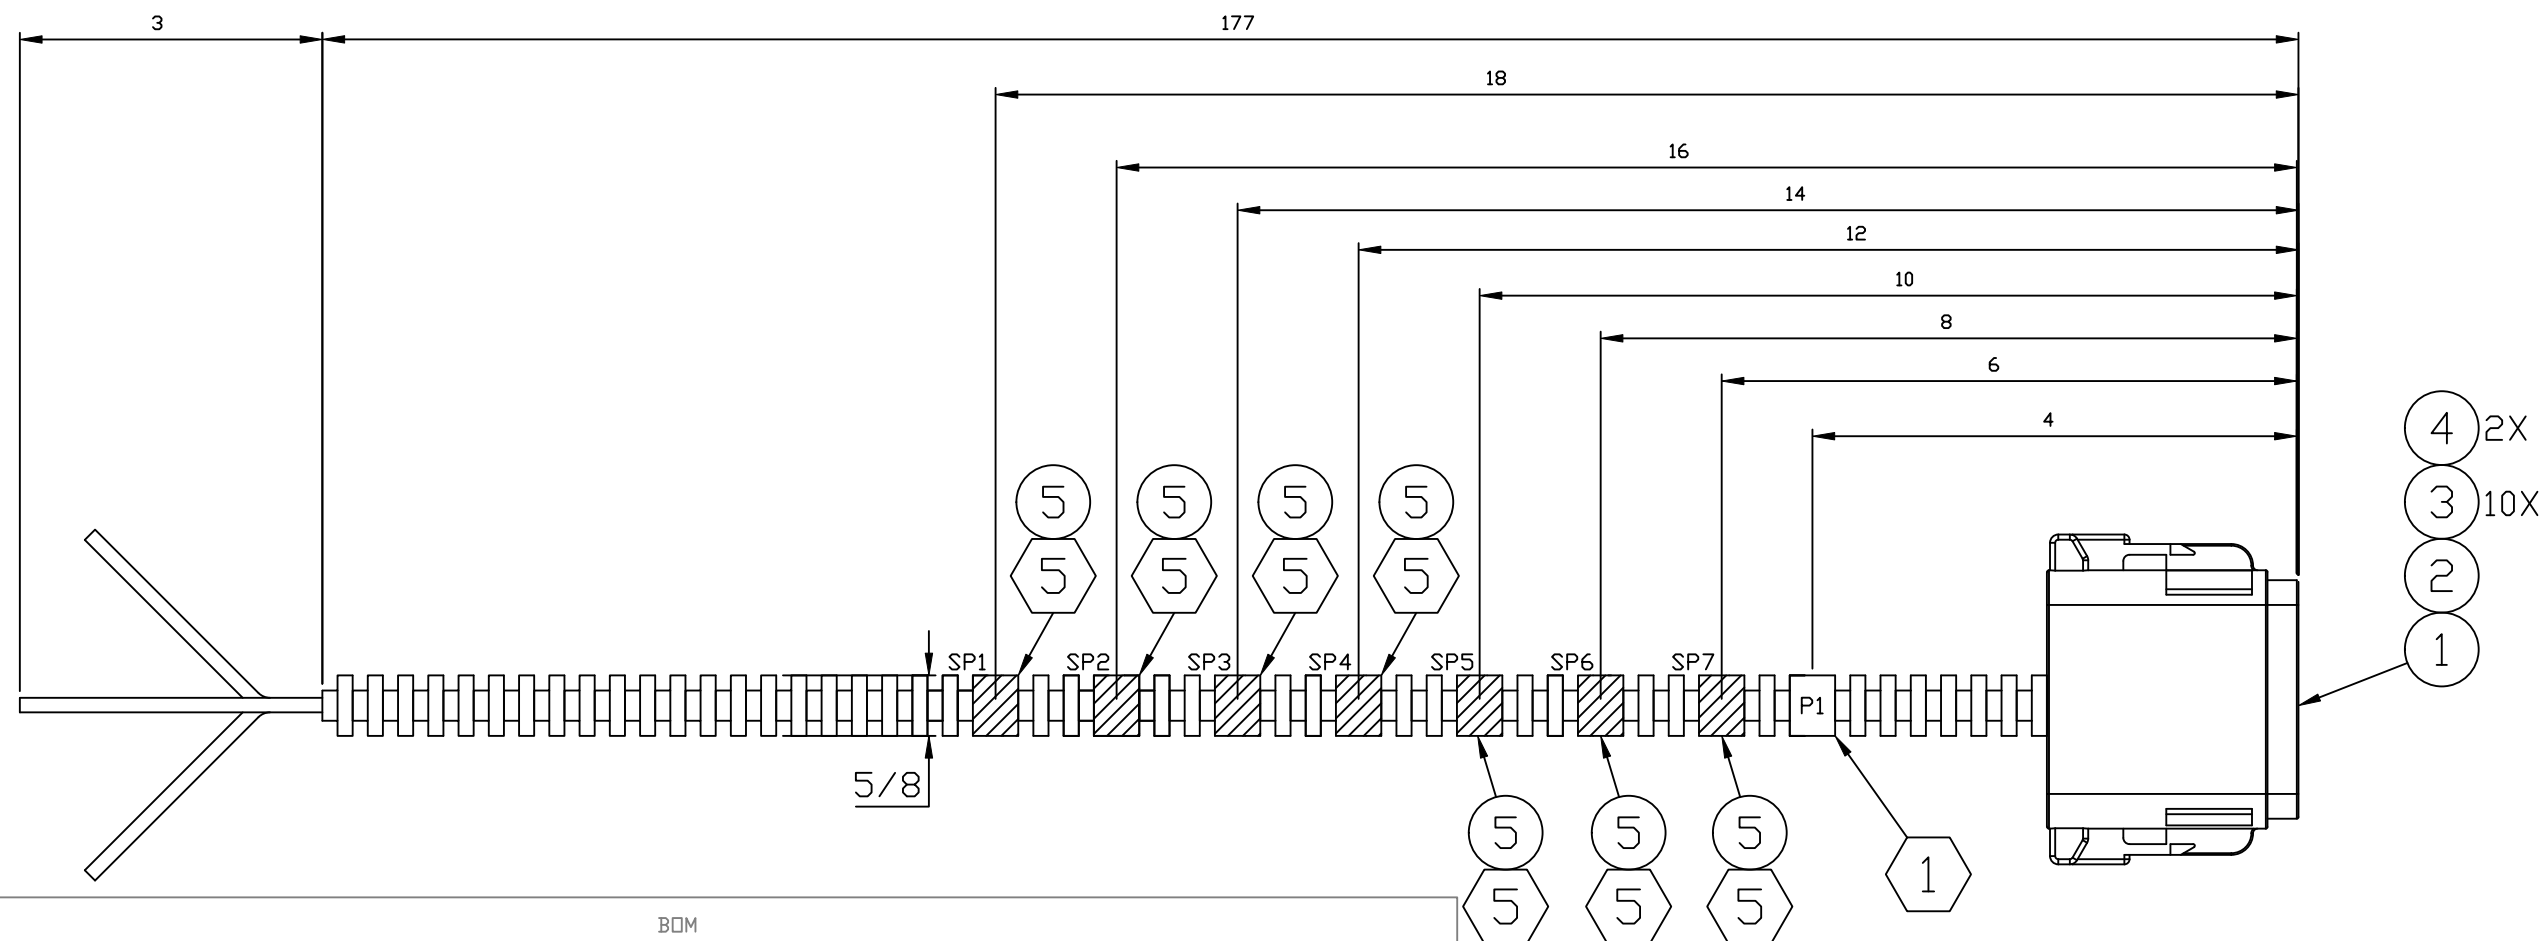


BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	DT06-12SA	DEUTSCH PLUG HOUSING FOR FEMALE TERMINALS	ea
2	1	W12S	AUTOMOTIVE CONNECTOR LOCK	ea
3	10	0462-209-16141	Automotive Terminals, Socket, Pin Diameter 1.59 mm (.063 in), 14 AWG Wire Size	ea
4	2	0413-217-1605	Automotive Seals & Cavity Plugs, PBT	ea
5	7	7009718	16-14 AWG to 12-10 AWG Power Phase® Yellow Polyolefin Sealed Crimp	ea
WIRE/LOOM LIST/LABELS				
QTY.	Units	Stock Desc.		
220	in	BLUE 14 AWG		
194	in	BLACK 14 AWG		
210	in	WHITE 14 AWG		
177	in	HIGH TEMPERATURE SPLIT LOOM NYLON, BLACK W/ GRAY STRIPE, SLIT 5/8"		
1	ea	BLACK ELECTRICAL TAPE		
1	ea	LABEL		
14	in	3/8" ADESIVE COATED SHRINK BLACK		

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT
- ① PLACE LABELS IN THE FOLLOWING LOCATIONS APPROX
- 2 ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCATION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 3 WRAP ELECTRICAL TAPE AT EACH JOINT ON THE HARNESS
- 4 GXL BRAND WIRE SHALL BE USED
- ⑤ SHRINK ADESIVE COATED SHRINK OVER TOP OF SPLICE

PART NO.		2187-1012		NAME		DATE			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:	JS	4/4/2023					
		DRAWN BY:	JS	4/4/2023					
		MATERIAL							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		PROCESS				TITLE: AWP FLAT BED CAB HARNESS			
		THICKNESS							
		UNITS		in		SIZE B		DRAWING NO. 2187-1012	
DO NOT SCALE DRAWING				SCALE: NTS		WEIGHT:		SHEET 1 OF 2	

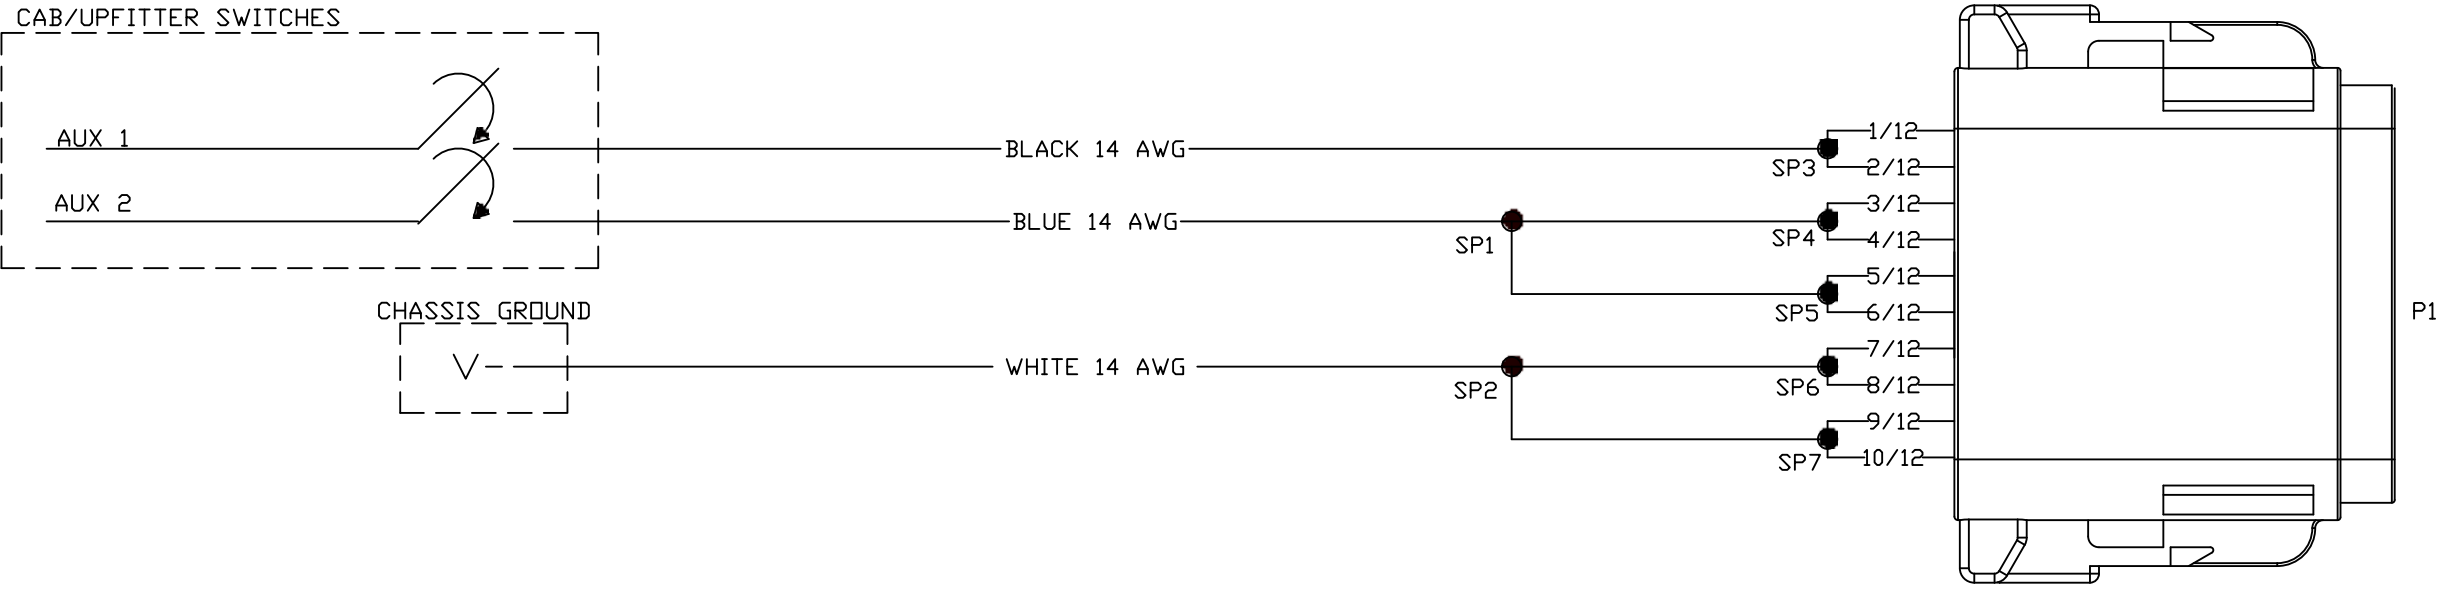

PART NO.		2187-1012				NAME		DATE		TITLE: AWP FLAT BED CAB HARNESS	
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:		JS		4/4/2023					
		DRAWN BY:		JS		4/4/2023					
		MATERIAL									
		PROCESS									
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		THICKNESS				SIZE B DRAWING NO. 2187-1012 REV 0					
		UNITS in									
		DO NOT SCALE DRAWING				SCALE: NTS		WEIGHT:		SHEET 2 OF 2	

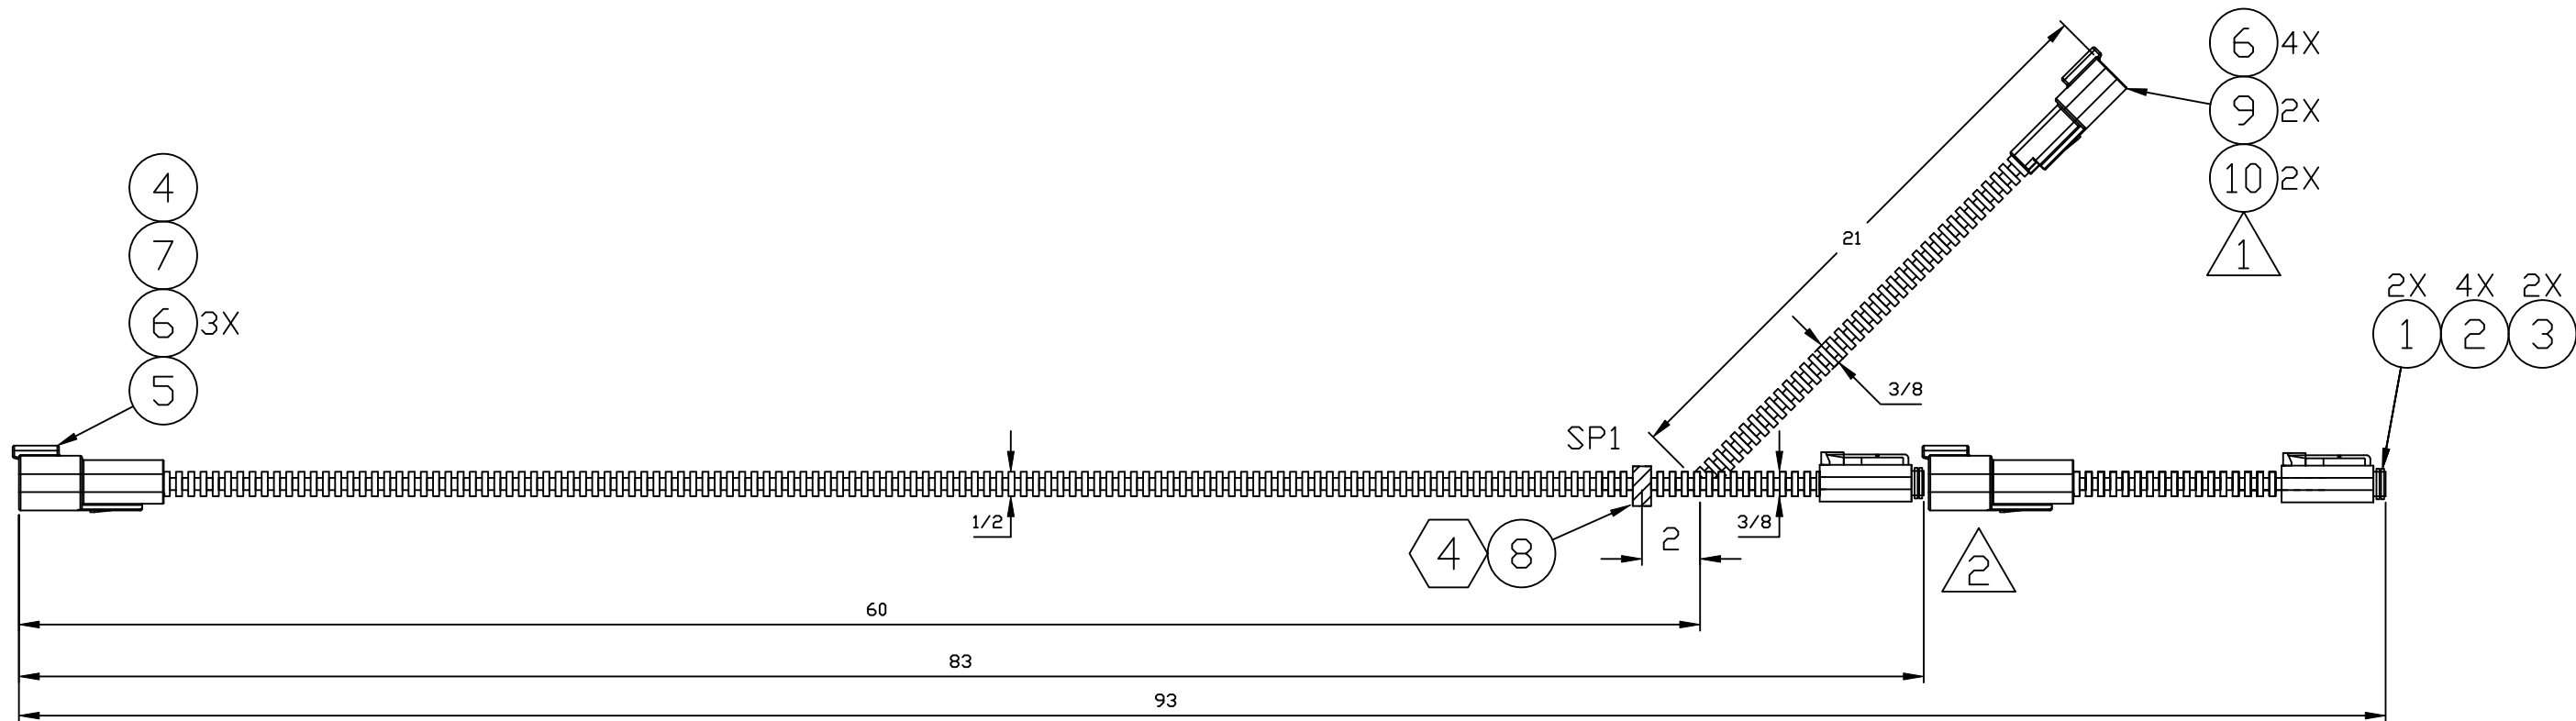


BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	2	DT06-2S	Housing for Female Terminals, Wire-to-Wire, 2 Position	ea
2	2	W2S	Automotive Connector Locks & Position Assurance, Secondary Lock	ea
3	4	0462-209-16141	Automotive Terminals, Socket, Pin Diameter 1.59 mm [0.063 in], 14 AWG Wire Size	ea
4	1	0413-217-1605	Automotive Seals & Cavity Plugs, PBT	ea
5	1	DT04-4P	Housing for Male Terminals, Wire-to-Wire, 4 Position,	ea
6	7	0460-215-16141	Automotive Terminals, Pin, Pin Diameter	ea
7	2	W4P	Automotive Connector Locks & Position Assurance, Secondary Lock,	ea
8	1	7009718	16-14 AWG to 12-10 AWG Power Phase® Yellow Polyolefin Sealed Crimp	ea
9	2	DT04-2P	Housing for Male Terminals	ea
10	2	W2P	Automotive Connector Locks & Position Assurance, Secondary Lock	ea



- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT
- 1 ALTERNATE PART NO. ARE ALLOWED AS LONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCTION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 2 WRAP ELECTRICAL TAPE AT EACH JOINT ON THE HARNESS
- 3 GXL BRAND WIRE SHALL BE USED
- ④ SHRINK ADESIVE COATED SHRINK OVER TOP OF SPLICE

REVISION TABLE				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	replaced male connector with female	07/05/2023	JS
	2	added brake away plug for work light/updated bom	02/20/2024	JS

PART NO.	2187-1013		NAME	DATE	TITLE:AWP FLAT BED RAIL HARNESS/DRIVER SIDE						
		MODEL BY:	JS	4/4/2023							
		DRAWN BY:	JS	4/4/2023							
TOLERANCES: UNLESS OTHERWISE SPECIFIED:											
FRACTIONAL: ± 1/2"				SIZE B				DRAWING NO. 2187-1013		REV 2	
ANGULAR: ± 1°											
TWO PLACE DECIMAL ± .01"											
THREE PLACE DECIMAL ± .005"				SCALE: NTS				WEIGHT:		SHEET 1 OF 2	
THICKNESS											
UNITS in											
DO NOT SCALE DRAWING											
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.											

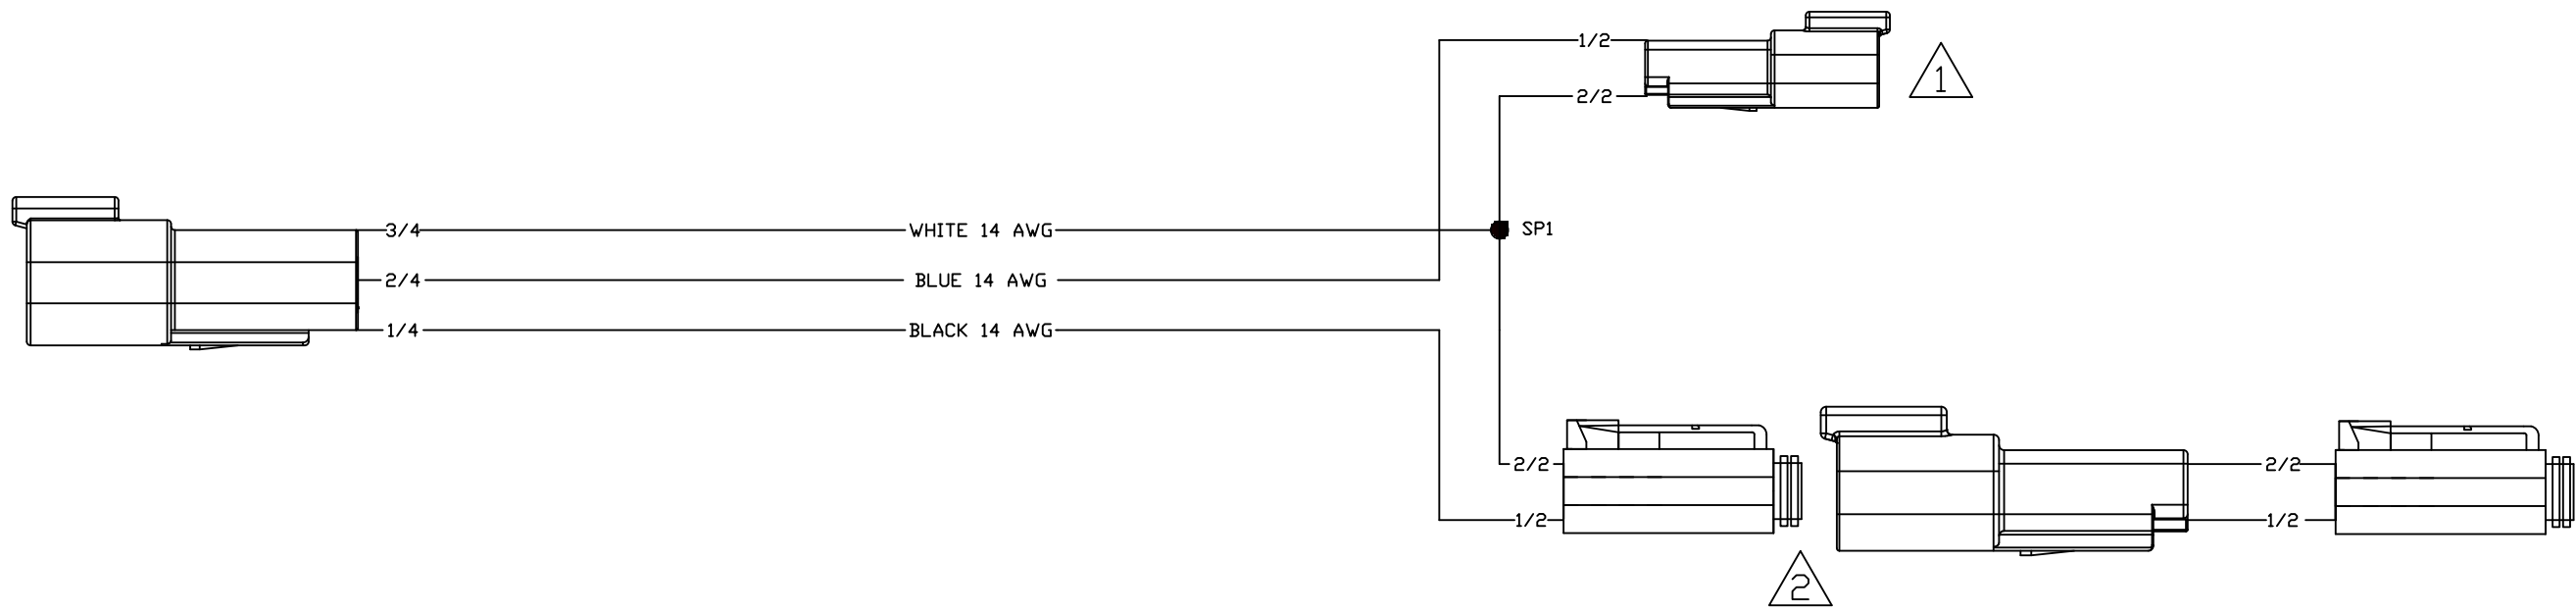

PART NO.		2187-1013		NAME		DATE		TITLE:AWP FLAT BED RAIL HARNESS/DRIVER SIDE			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:		JS		4/4/2023					
		DRAWN BY:		JS		4/4/2023					
		MATERIAL									
		PROCESS									
		THICKNESS									
		UNITS									
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.				in		SIZE B		DRAWING NO. 2187-1013		REV 2	
DO NOT SCALE DRAWING				SCALE: NTS		WEIGHT:		SHEET 2 OF 2			

1

2

4

BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	DT04-12PA	Housing for Male Terminals, Wire-to-Wire, 12 Position	ea
2	2	DT06-4S	PLUG DT 4 WAY	ea
3	2	W4S	WEDGELOCK DT 4 WAY	ea
4	10	0462-209-16141	CON SOCKET SZ 16 14AWG	ea
5	4	0413-217-1605	Automotive Seals & Cavity Plugs, PBT	ea
6	1	W12P	Automotive Connector Locks & Position Assurance, Secondary Lock, Green, PBT, 12 Position	ea
7	16	0460-215-16141	Automotive Terminals, Pin, Pin Diameter 1.59 mm (.063 in), 14 AWG Wire	ea
8	2		16-14 to 22-18 splice reducer	ea
9	1	DT04-6P	Housing for Male Terminals, Wire-to-Wire, 4 Position,	ea
10	1	W6P	Automotive Connector Locks & Position Assurance, Secondary Lock,	ea
11	1	DT06-6S	PLG, 6P, GRY, E	ea
12	1	W6S	Automotive Connector Locks & Position Assurance, Secondary Lock,	ea
13	2	282087-1	AMP SUPERSEAL 1.5 SERIES 3P PL	ea
14	4	282466-1	MINI MIC RCPT CONTACT >1,5-	ea
15	6	281934-4	single wire seal	ea
16	2	282105-1	AMP SUPERSEAL 1.5 SERIES 3P CA	ea
17	6	282081-1	RUBBER PLUG	ea
18	20	0747509	16-14 AWG .157" Blue Female Bullet	ea

REVISION TABLE				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	SEE NOTE 6	02/19/2024	JS
	2	SEE NOTE 7	05/22/2024	JS
	3	SEE NOTE 8	06/24/2024	JS
	4	REMOVED RING TERMINAL AND CHANGE BOM DESC	11/14/2024	JS
	5	FLIP BLACK AND WHITE WIRES ON 282087-1	7/25/2025	TK

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT
- 1

ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCATION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 2

WRAP ELECTRICAL TAPE AT EACH JOINT ON THE HARNESS
- 3

GXL BRAND WIRE SHALL BE USED
- 4

ALL SP# IN WIRING DIAGRAM SHALL BE DONE APPROXIMATELY 4" AWAY BEFORE BRAKE OUT OF HANRESS
- 5


HARNESS IS TO BE LOOMED AND EACH JOINT IS TO BE TAPPED
- 6

MARKER LIGHTS HAVE BEEN ADDED TO HARNESS
ALONG WITH CONNECTORS AND BOM CHANGES
- 7


DIMENSIONS CHANGED AS WELL AS PLUG ADDED ON BALLOON 13
ADDED WIRES FOR 3 WAY MARKER LIGHT LICENSE PLATE LIGHT
ADDED BULLET CONNECTORS AS WELL AS TERMINAL
- 8

ADDED DIMENSIONS TO STROBE PASS, 3 LIGHT MARKER, TAIL LIGHT MARKER, MARKER/GROUND TO FRAME
LICENSE PALTE LIGHT, AND STROBE DRIVER REAR


PART NO.	2187-1015		NAME	DATE	 TITLE: AWP FLAT BED CHASSIS HARNESS		
		MODEL BY:	JS	4/4/2023			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY:	JS	4/4/2023			
		MATERIAL					
		PROCESS					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		THICKNESS			SIZE B	DRAWING NO. 2187-1015	REV 4
		UNITS in					
				DO NOT SCALE DRAWING			SCALE: NTS

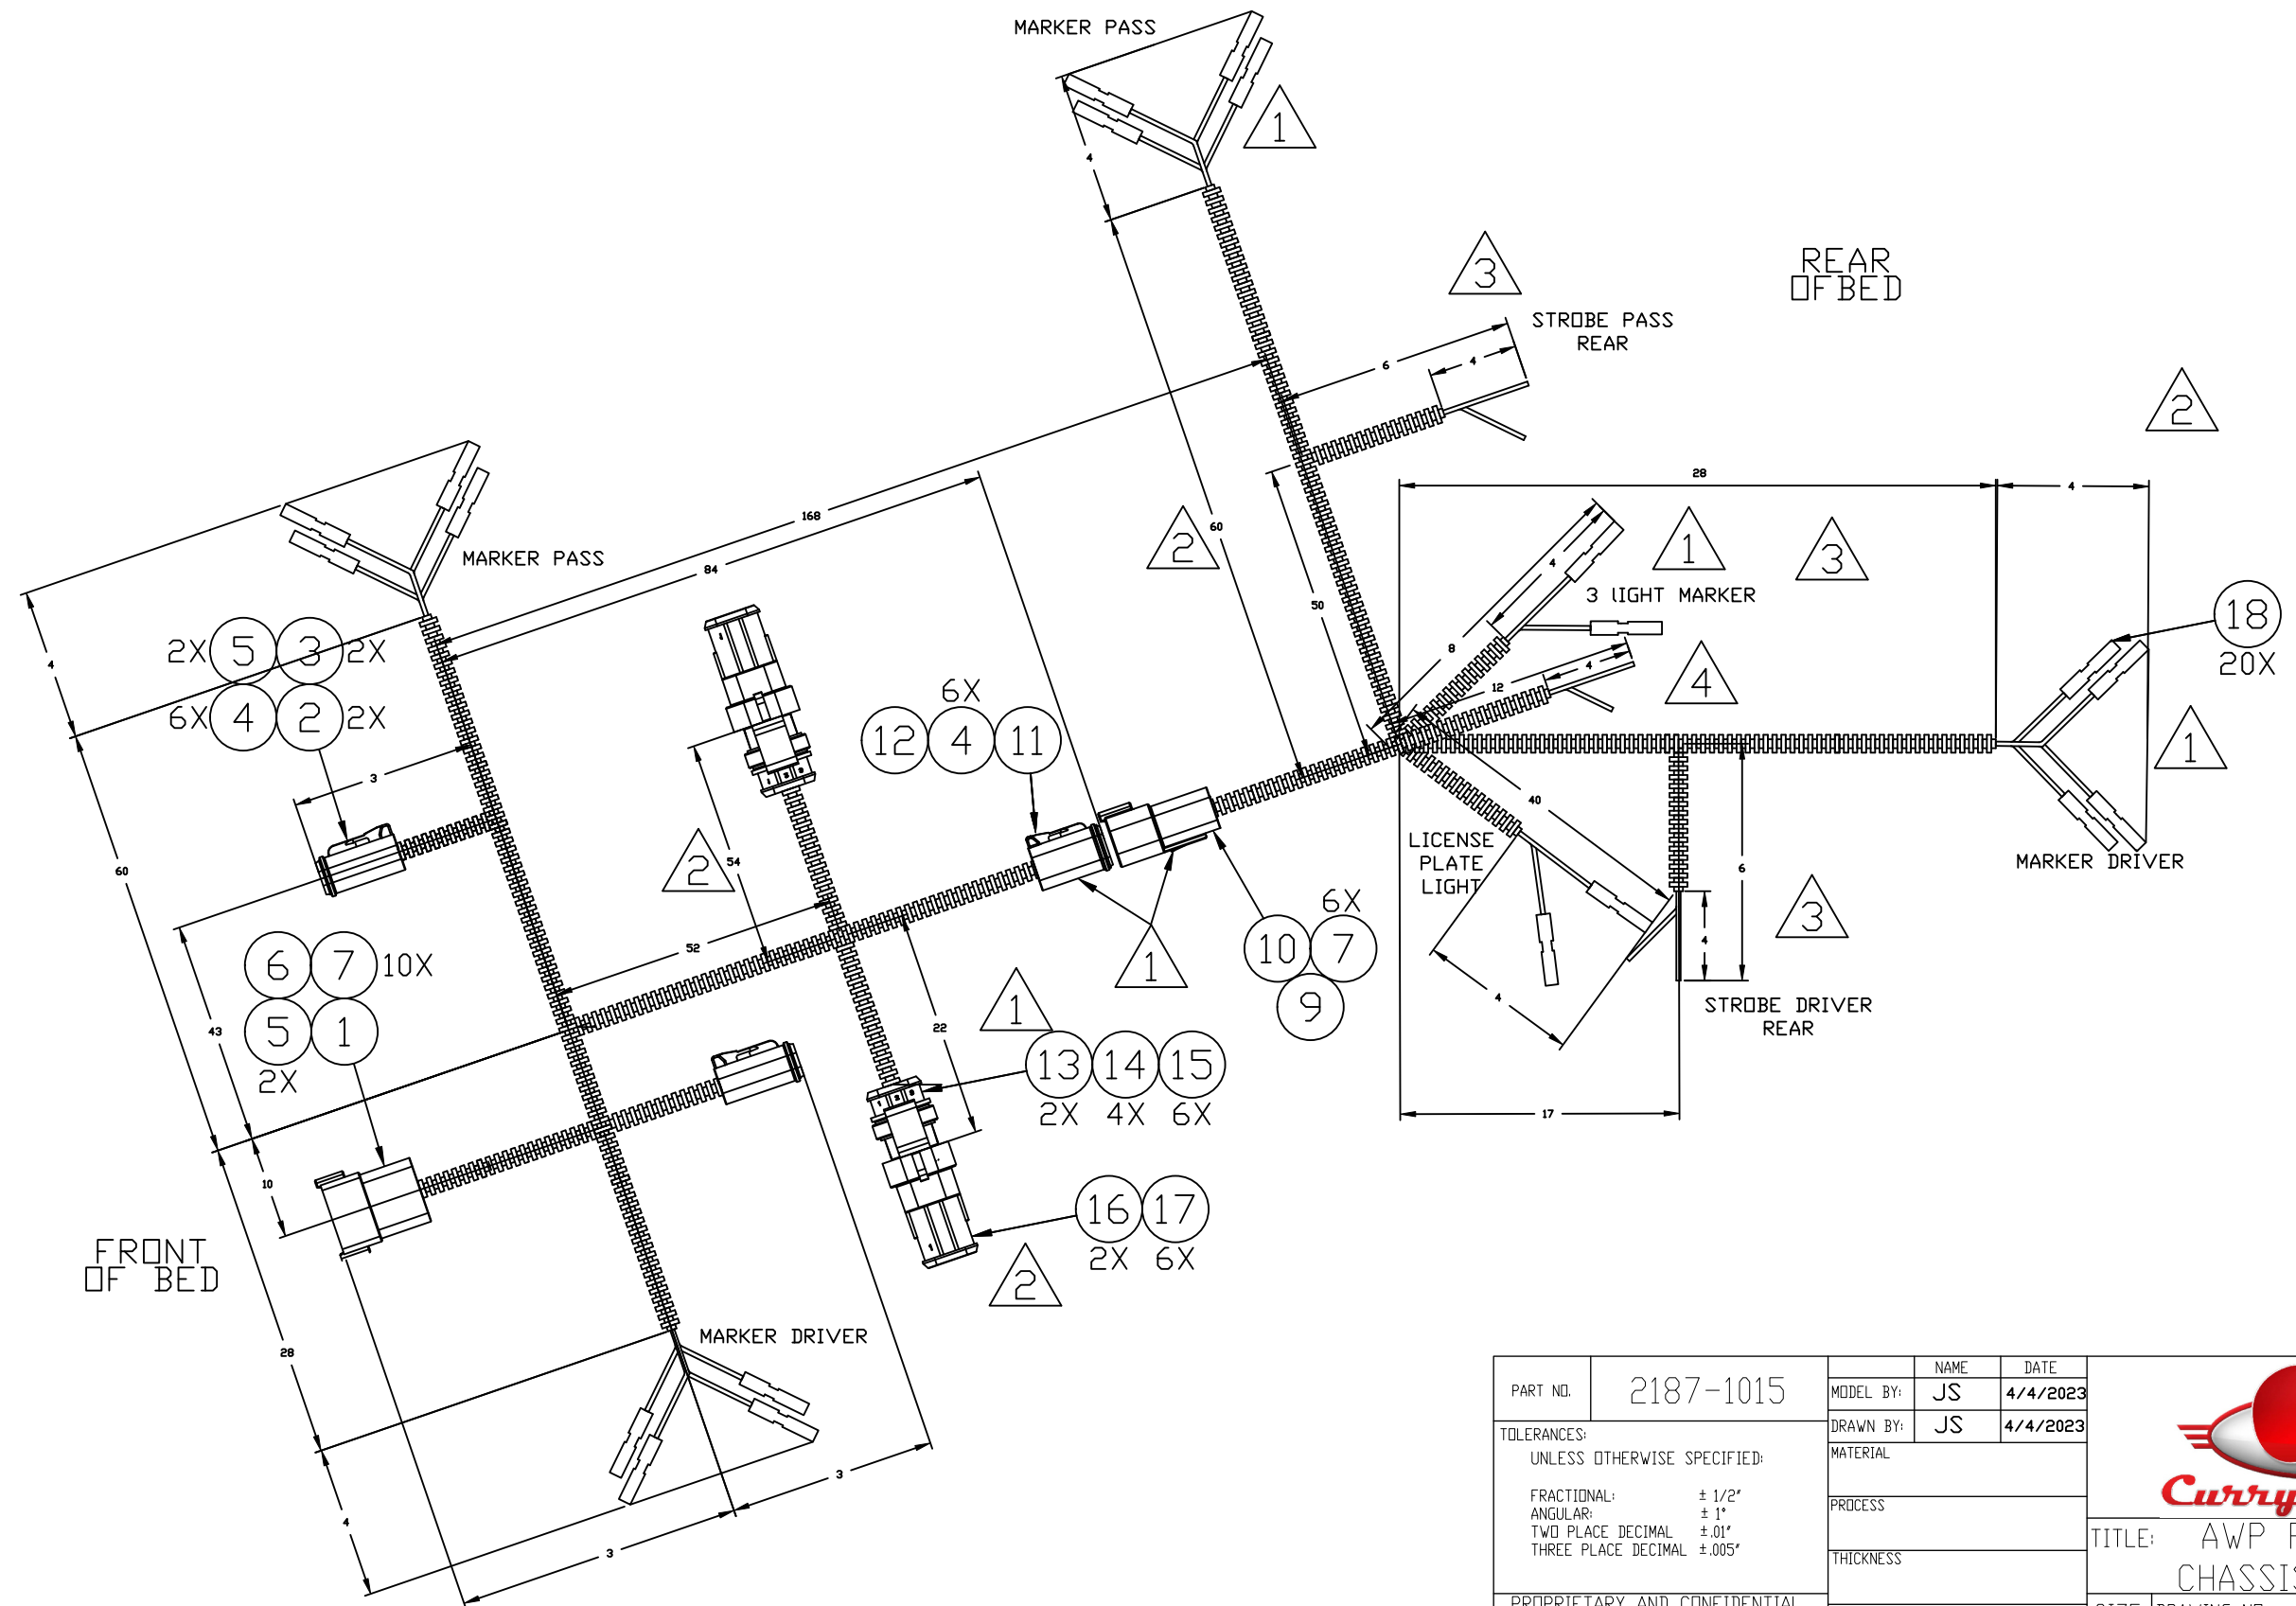

PART NO.		2187-1015											
		MODEL BY:	JS	DATE		4/4/2023							
		DRAWN BY:	JS			4/4/2023							
TOLERANCES: UNLESS OTHERWISE SPECIFIED:		MATERIAL											
		PROCESS											
		THICKNESS								TITLE:		AWP FLAT BED	
												CHASSIS HARNESS	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS		in		SIZE		DRAWING NO.		REV			
						B		2187-1015		4			
		DO NOT SCALE DRAWING				SCALE: NTS		WEIGHT:		SHEET 2 OF 3			

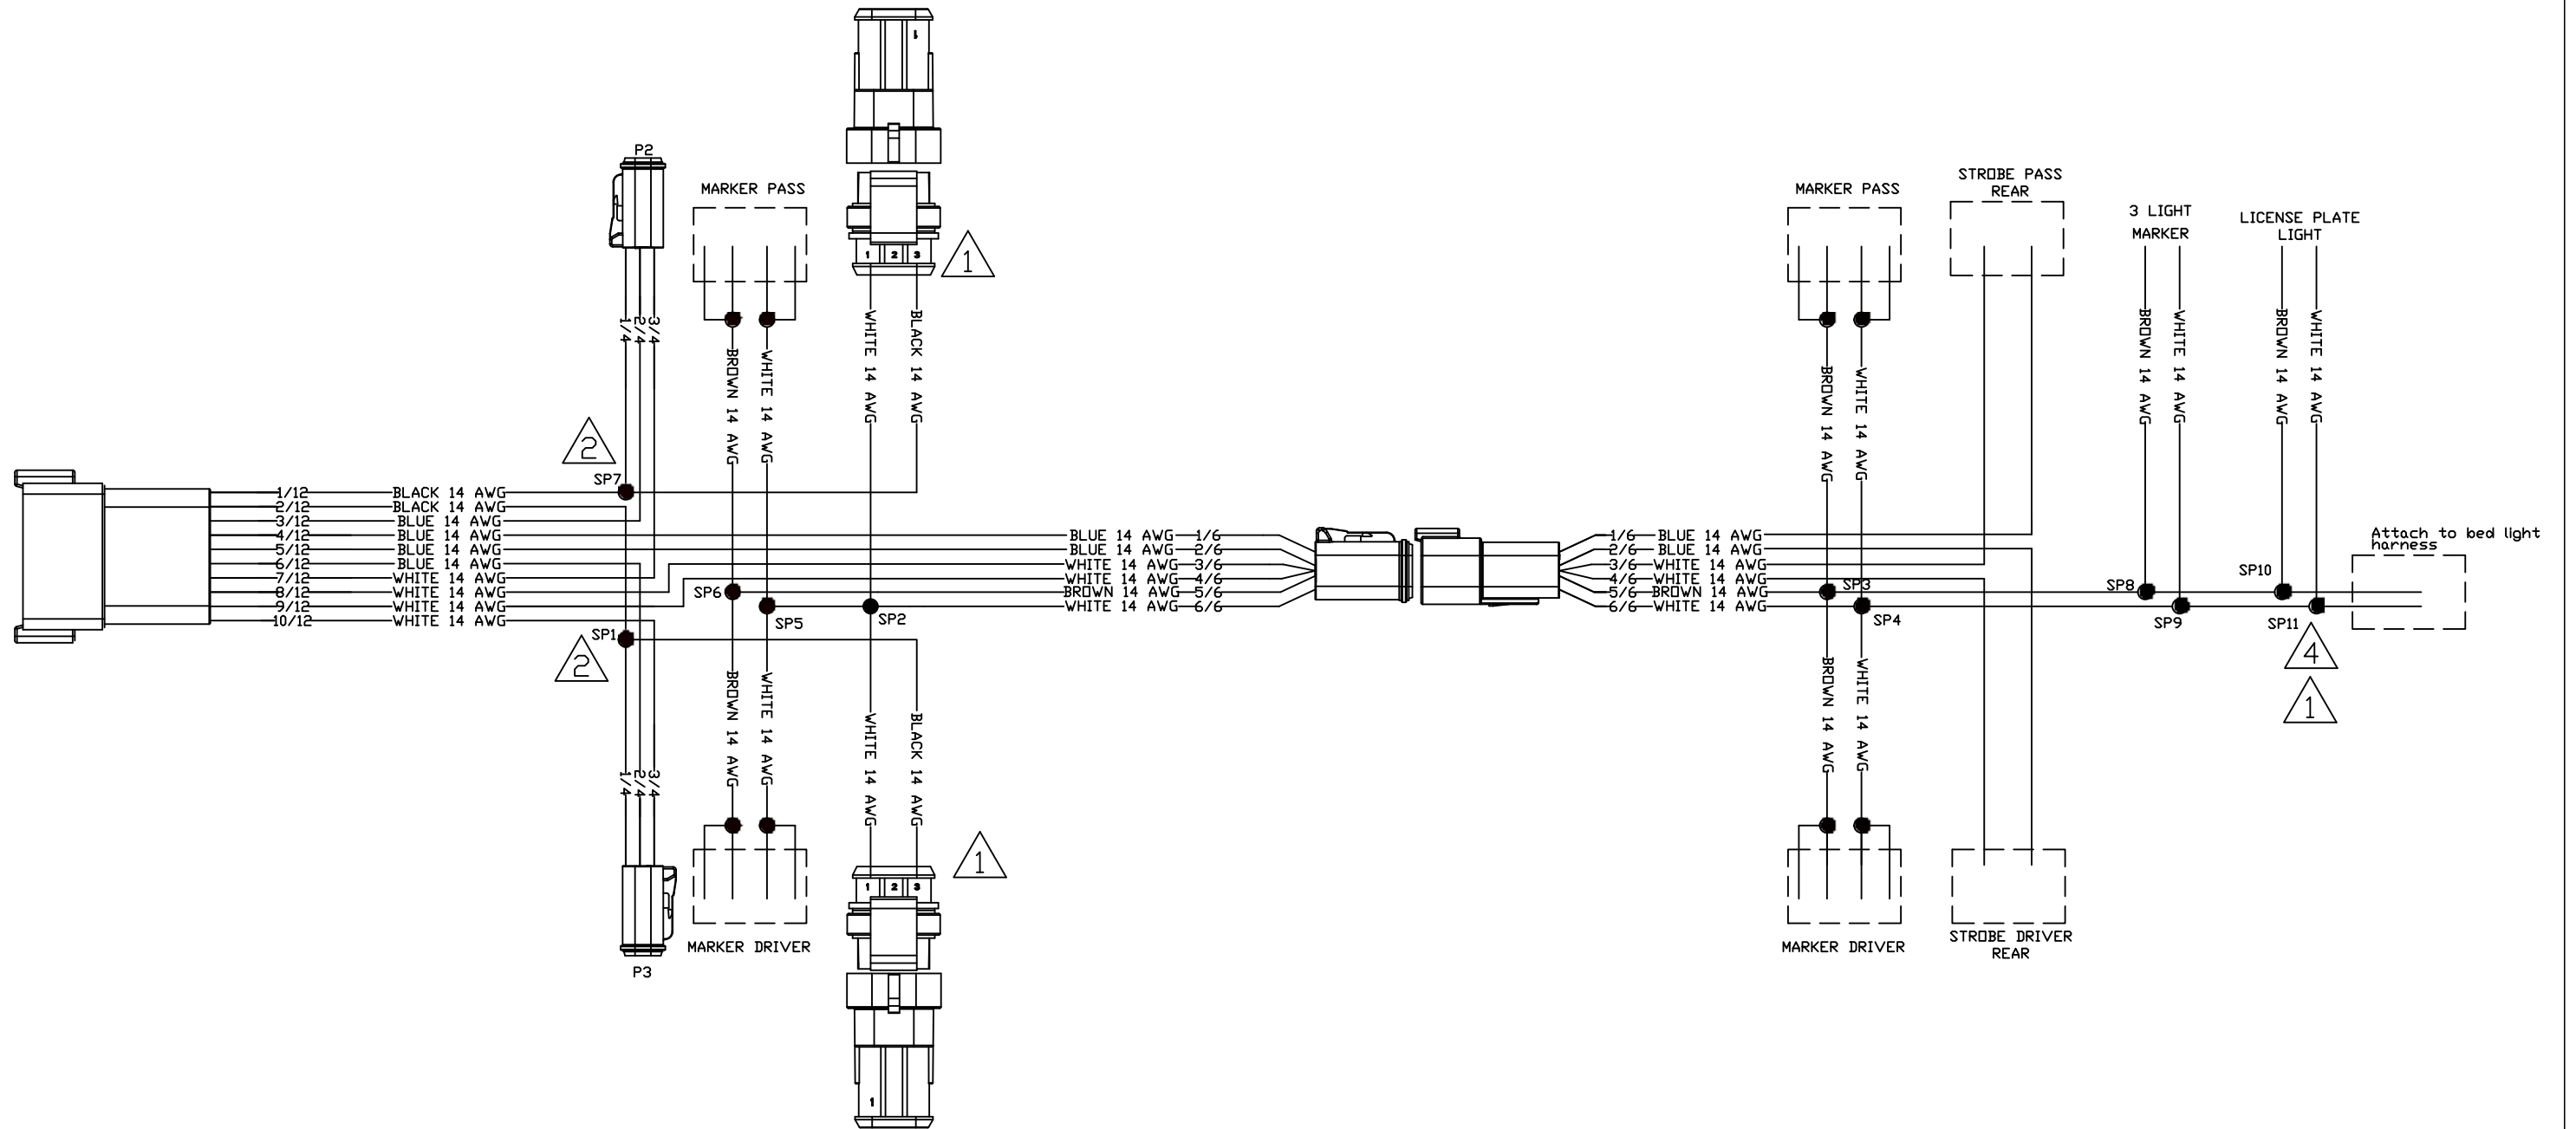


PART NO.		2187-1015		NAME		DATE							
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:		JS		4/4/2023							
		DRAWN BY:		JS		4/4/2023							
		MATERIAL											
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		PROCESS						TITLE: AWP FLAT BED CHASSIS HARNESS					
		THICKNESS											
		DO NOT SCALE DRAWING		UNITS		in		SIZE		DRAWING NO.		REV	
						B		2187-1015		4			
								SCALE: NTS		WEIGHT:		SHEET 3 OF 3	

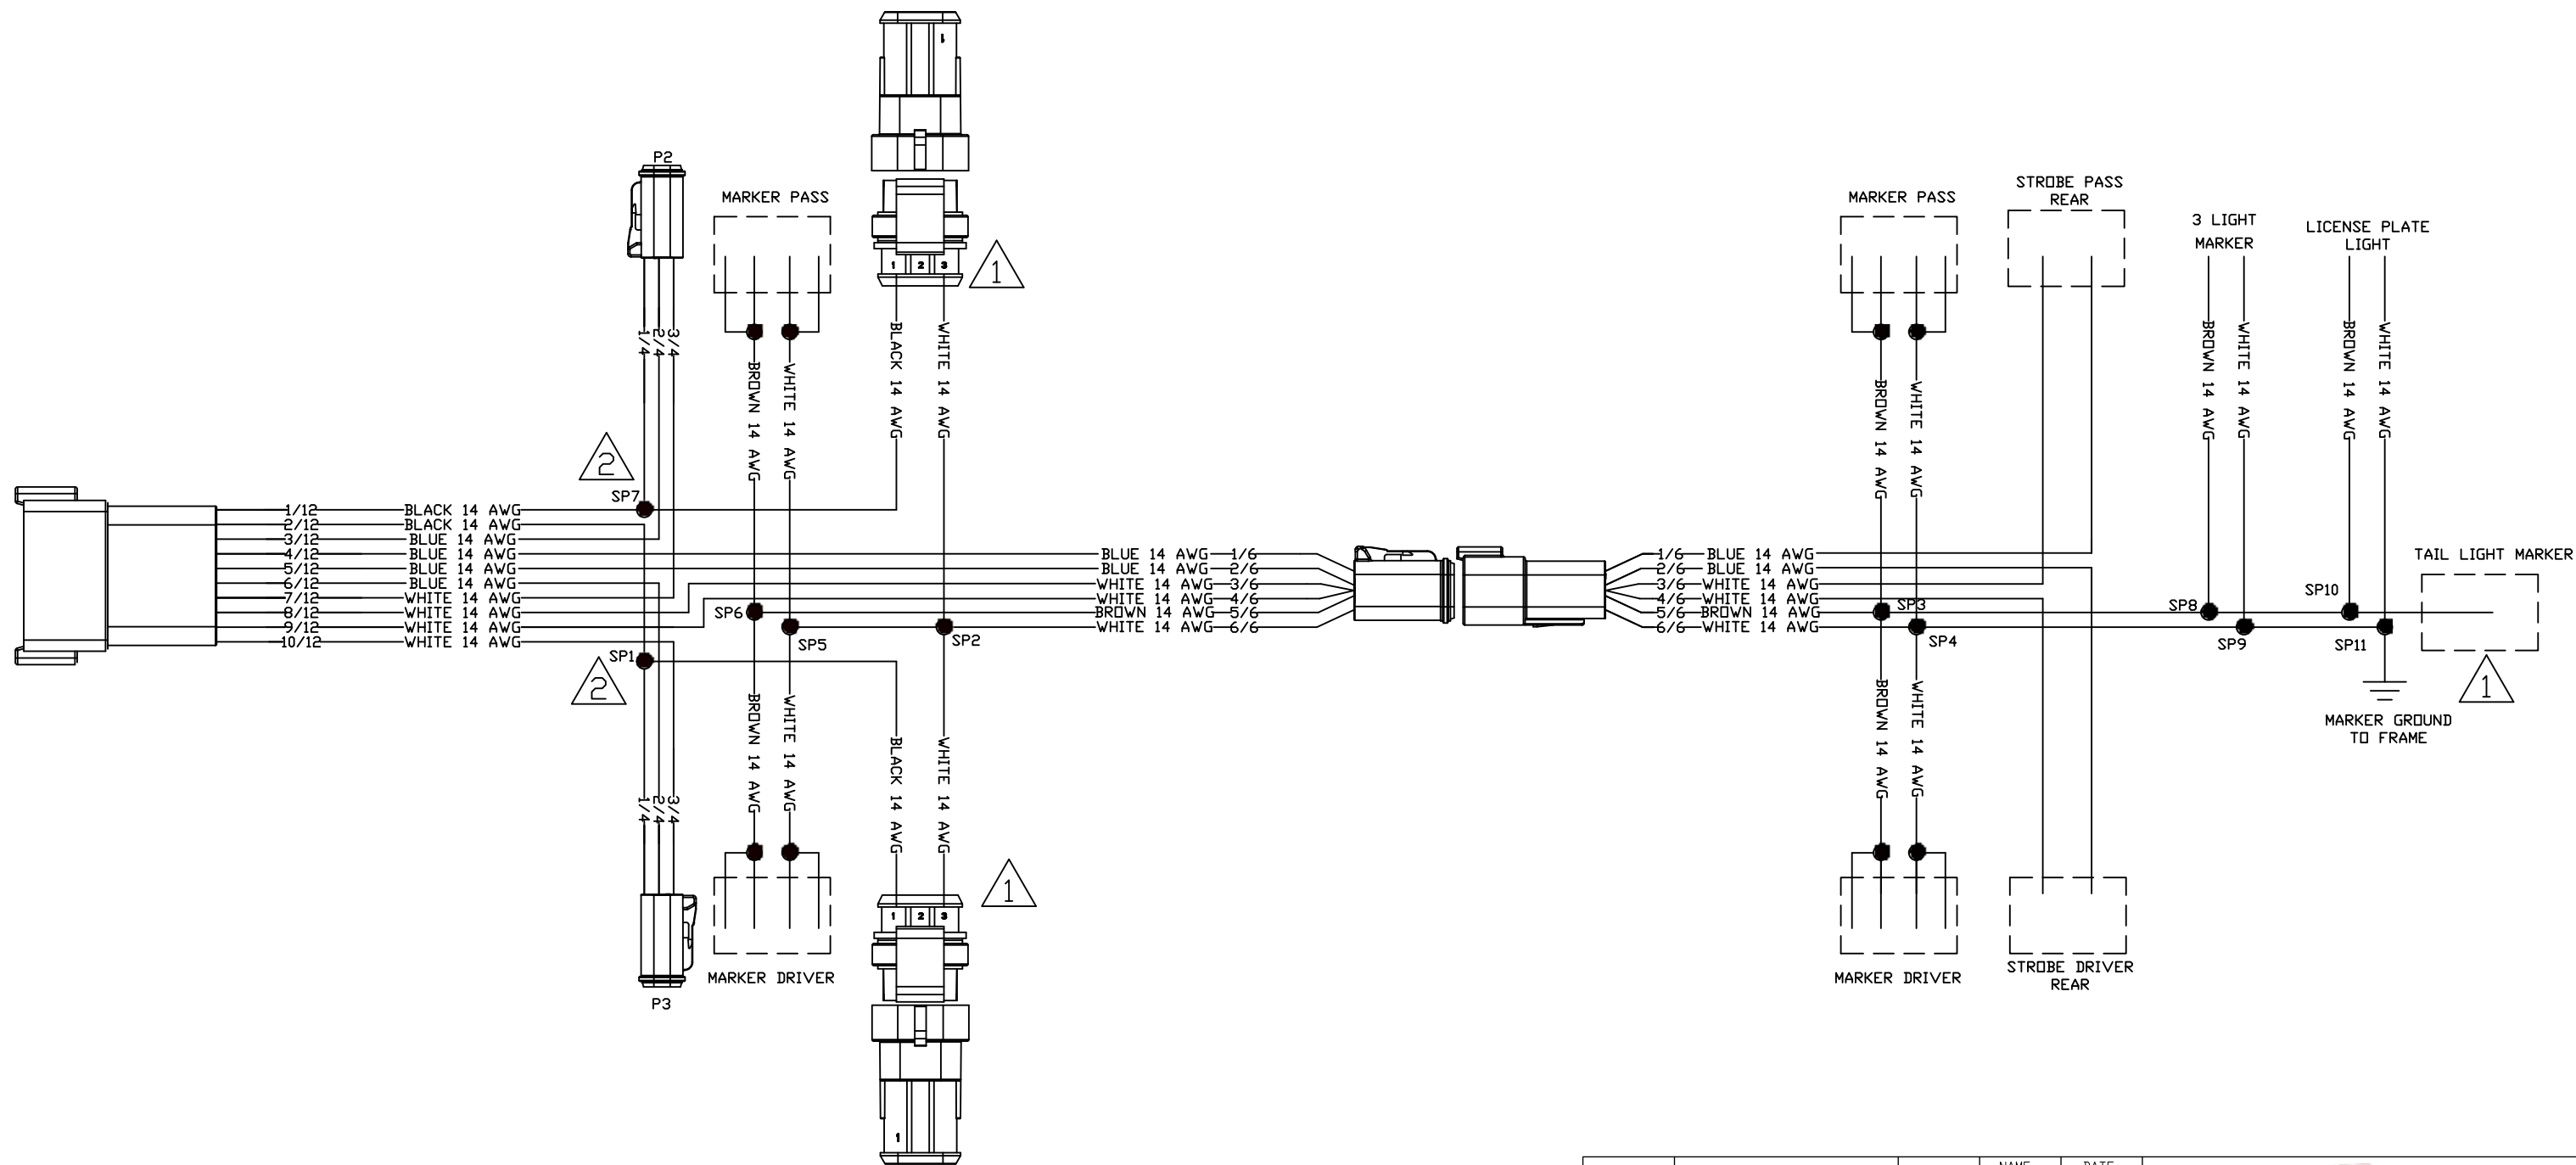


PART NO.	2187-1015	NAME	DATE
TOLERANCES:	UNLESS OTHERWISE SPECIFIED:	MODEL BY:	JS 4/4/2023
FRACTIONAL:	± 1/2"	DRAWN BY:	JS 4/4/2023
ANGULAR:	± 1°	MATERIAL	
TWO PLACE DECIMAL	± .01"	PROCESS	
THREE PLACE DECIMAL	± .005"	THICKNESS	
PROPRIETARY AND CONFIDENTIAL	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.	UNITS	in
		DO NOT SCALE DRAWING	
		TITLE:	AWP FLAT BED CHASSIS HARNESS
		SIZE	DRAWING NO.
		B	2187-1015
		SCALE: NTS	WEIGHT:
			SHEET 3 OF 3



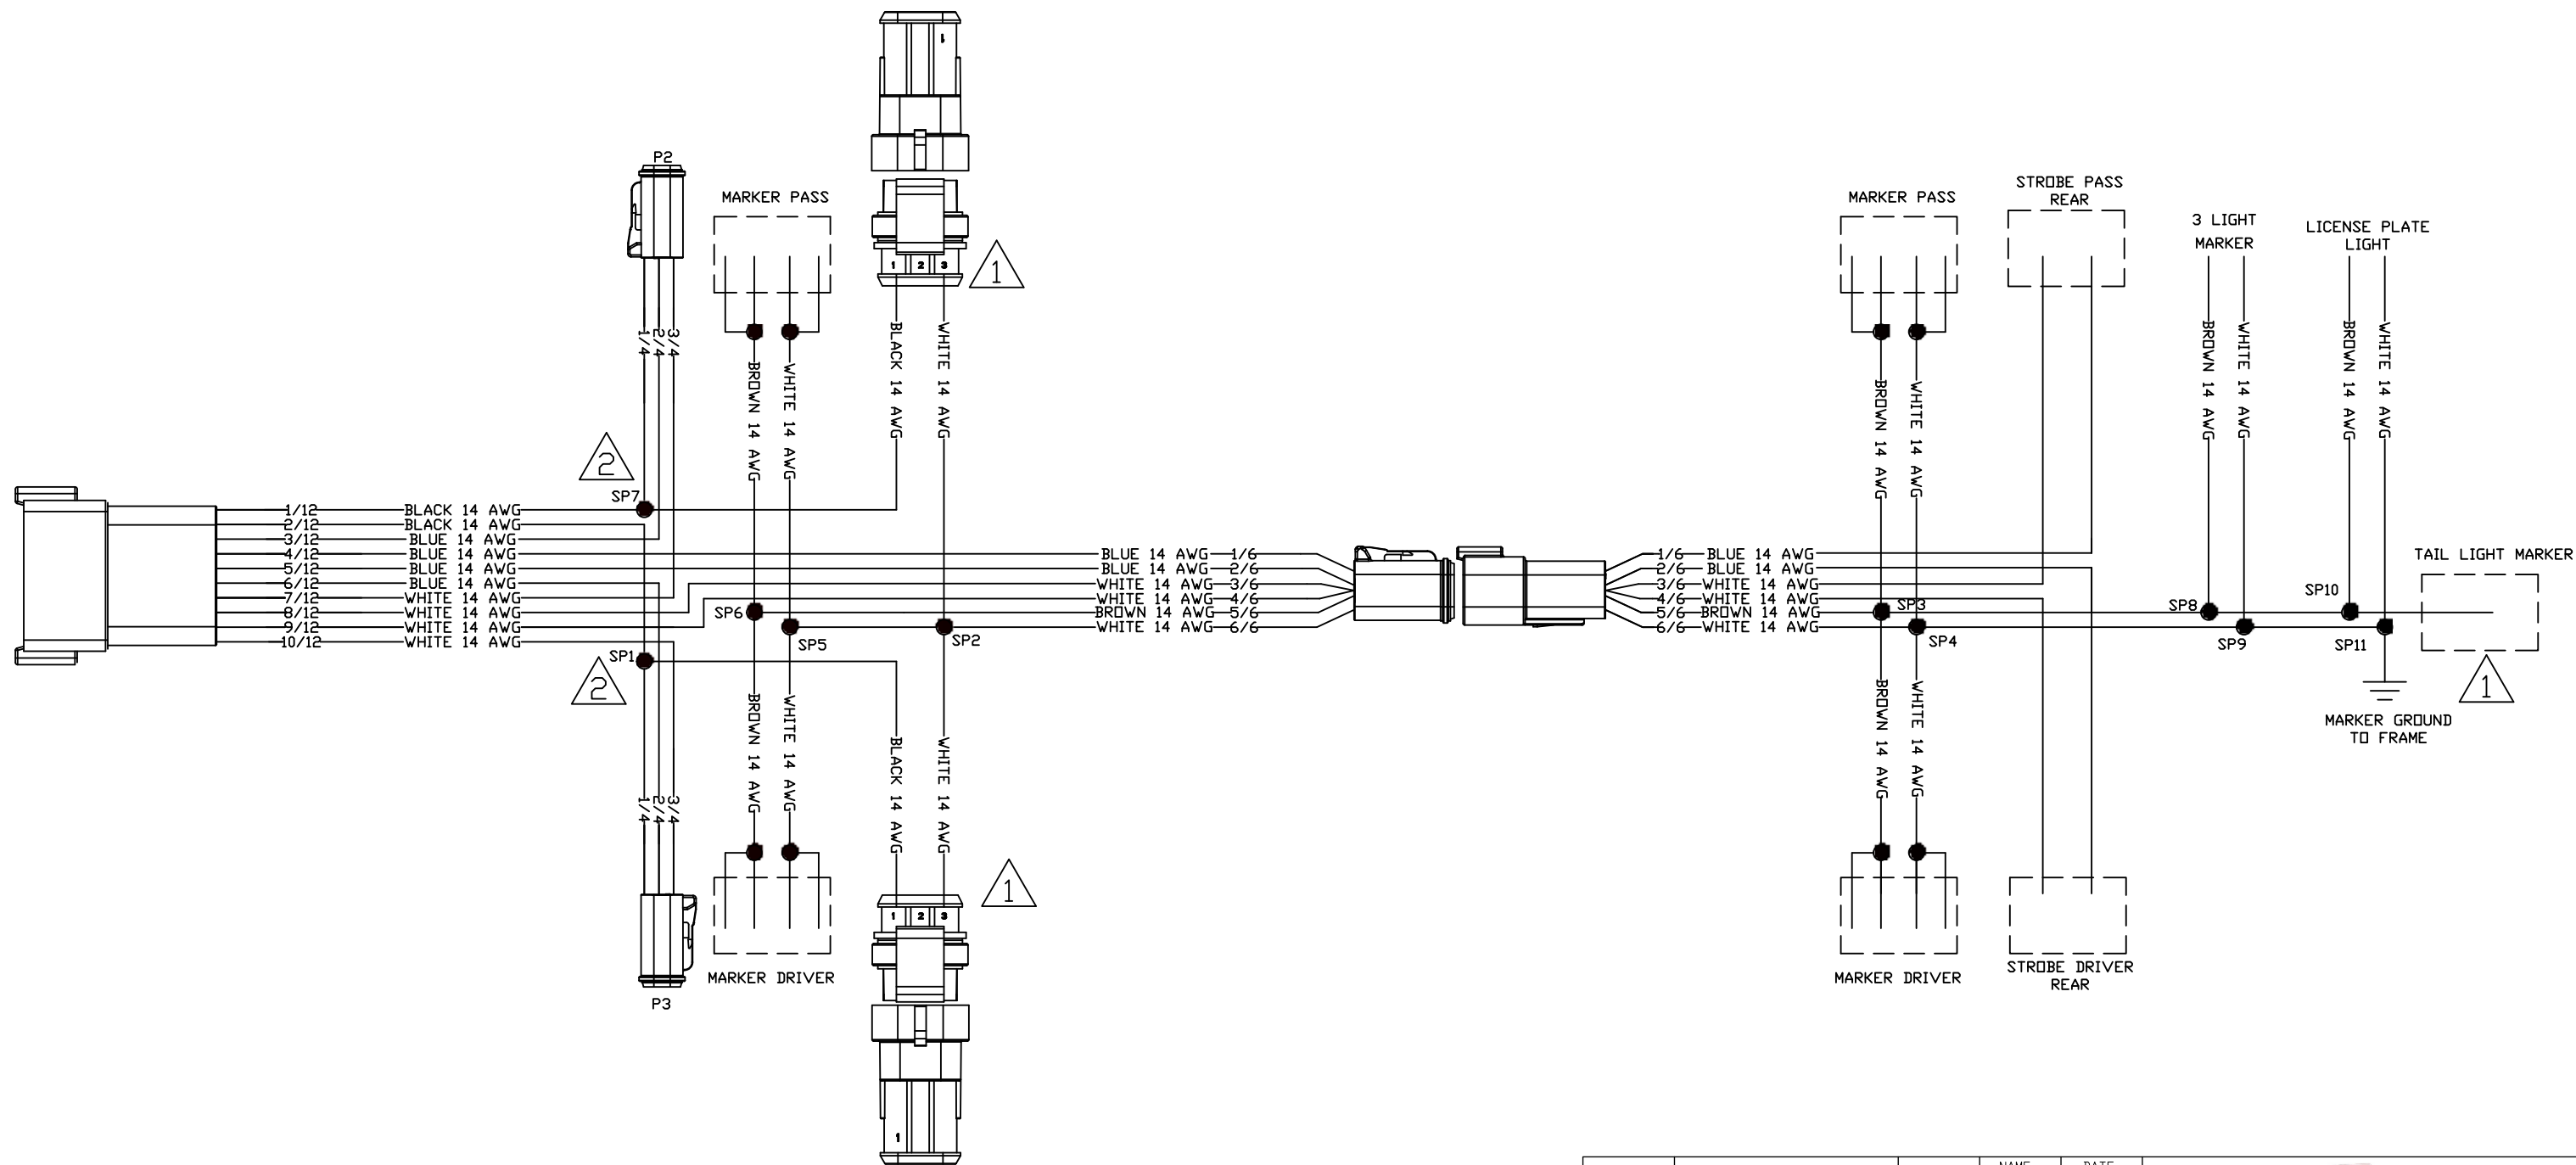


PART NO.	2187-1015	NAME		DATE								
		MODEL BY:	JS	4/4/2023								
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY:	JS	4/4/2023					TITLE: AWP FLAT BED CHASSIS HARNESS			
		MATERIAL										
		PROCESS										
		THICKNESS			SIZE B		DRAWING NO. 2187-1015		REV 2			
		UNITS in			SCALE: NTS		WEIGHT:		SHEET 3 OF 3			
DO NOT SCALE DRAWING												
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.												

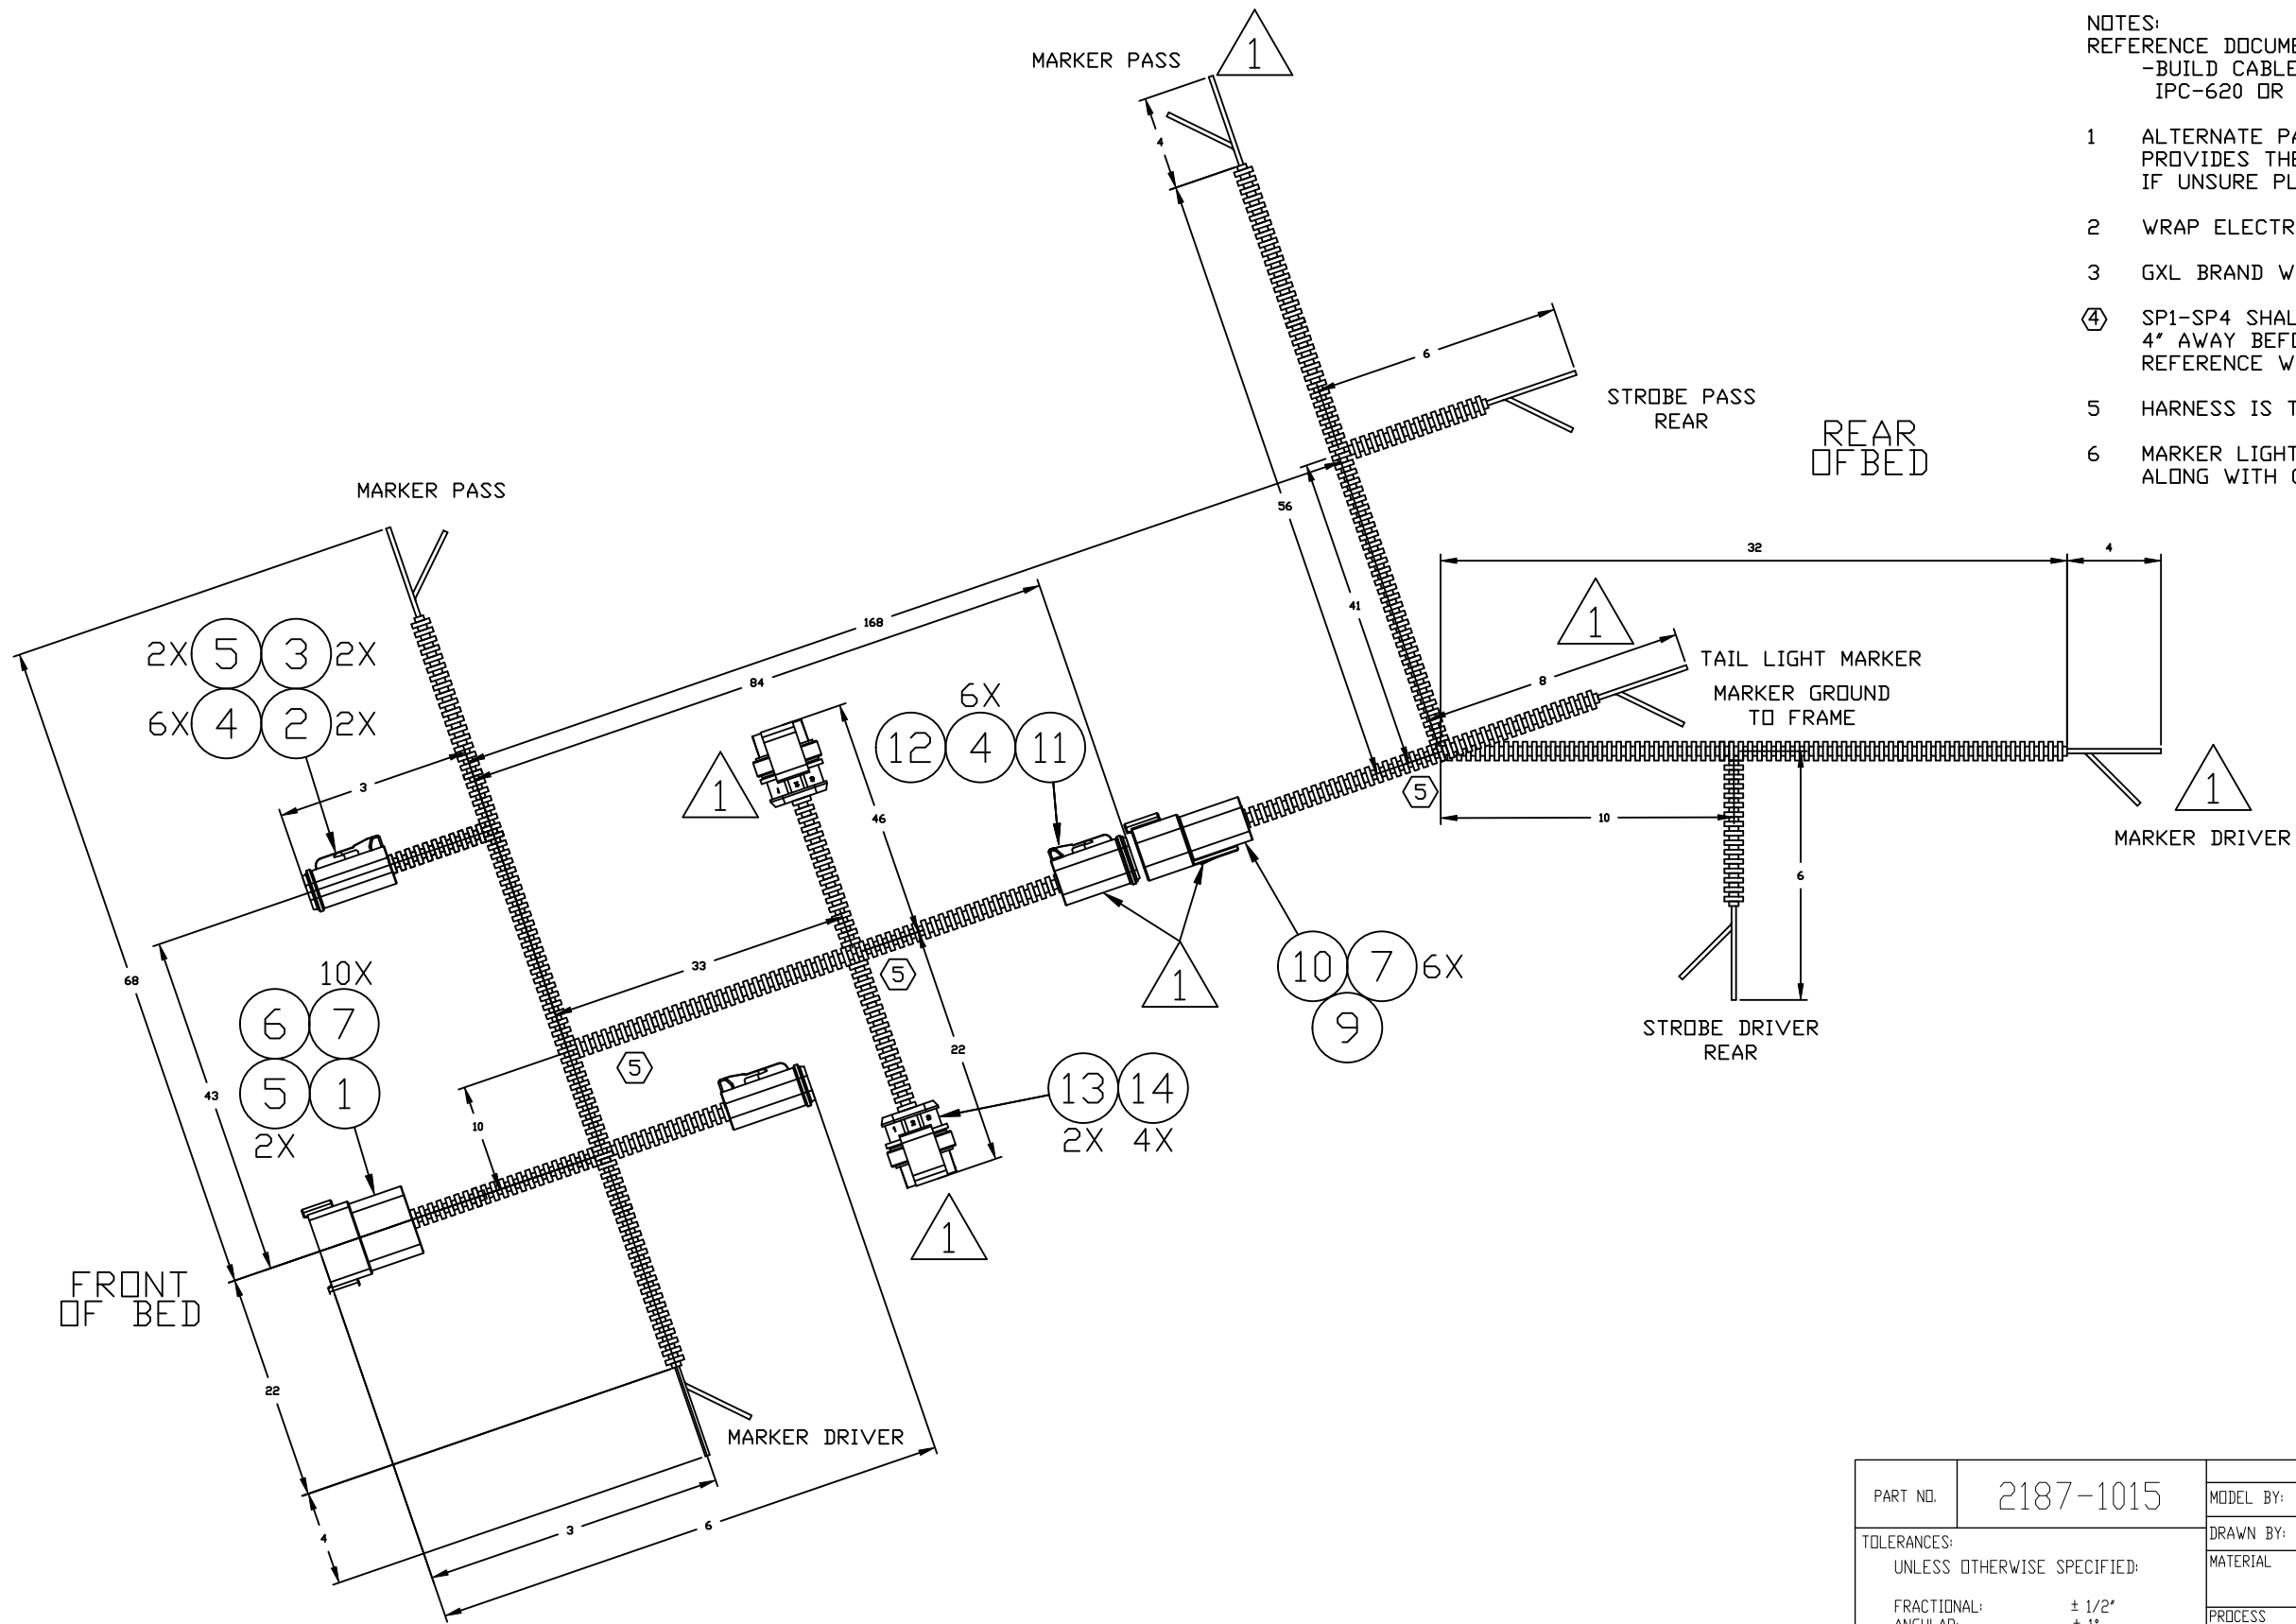

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT
- 1 ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCATION. IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
 - 2 WRAP ELECTRICAL TAPE AT EACH JOINT ON THE HARNESS
 - 3 GXL BRAND WIRE SHALL BE USED
 - ④ SP1-SP4 SHALL BE DONE APPROXIMATELY 4' AWAY BEFORE BRAKE OUT OF HANRESS REFERENCE WIRING DIGRAM FOR LOCATION OF SP1-SP6
 - 5 HARNESS IS TO BE LOOMED AND EACH JOINT IS TO BE TAPPED
 - 6 MARKER LIGHTS HAVE BEEN ADDED TO HARNESS ALONG WITH CONNECTORS AND BOM CHANGES

PART NO.	2187-1015		NAME	DATE			
		MODEL BY:	JS	4/4/2023			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1" TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY:	JS	4/4/2023			
	MATERIAL						
	PROCESS						
	THICKNESS						
	UNITS						
in			SIZE	DRAWING NO.	REV		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.			B	2187-1015	1		
			DO NOT SCALE DRAWING		SCALE: NTS	WEIGHT:	SHEET 1 OF 3

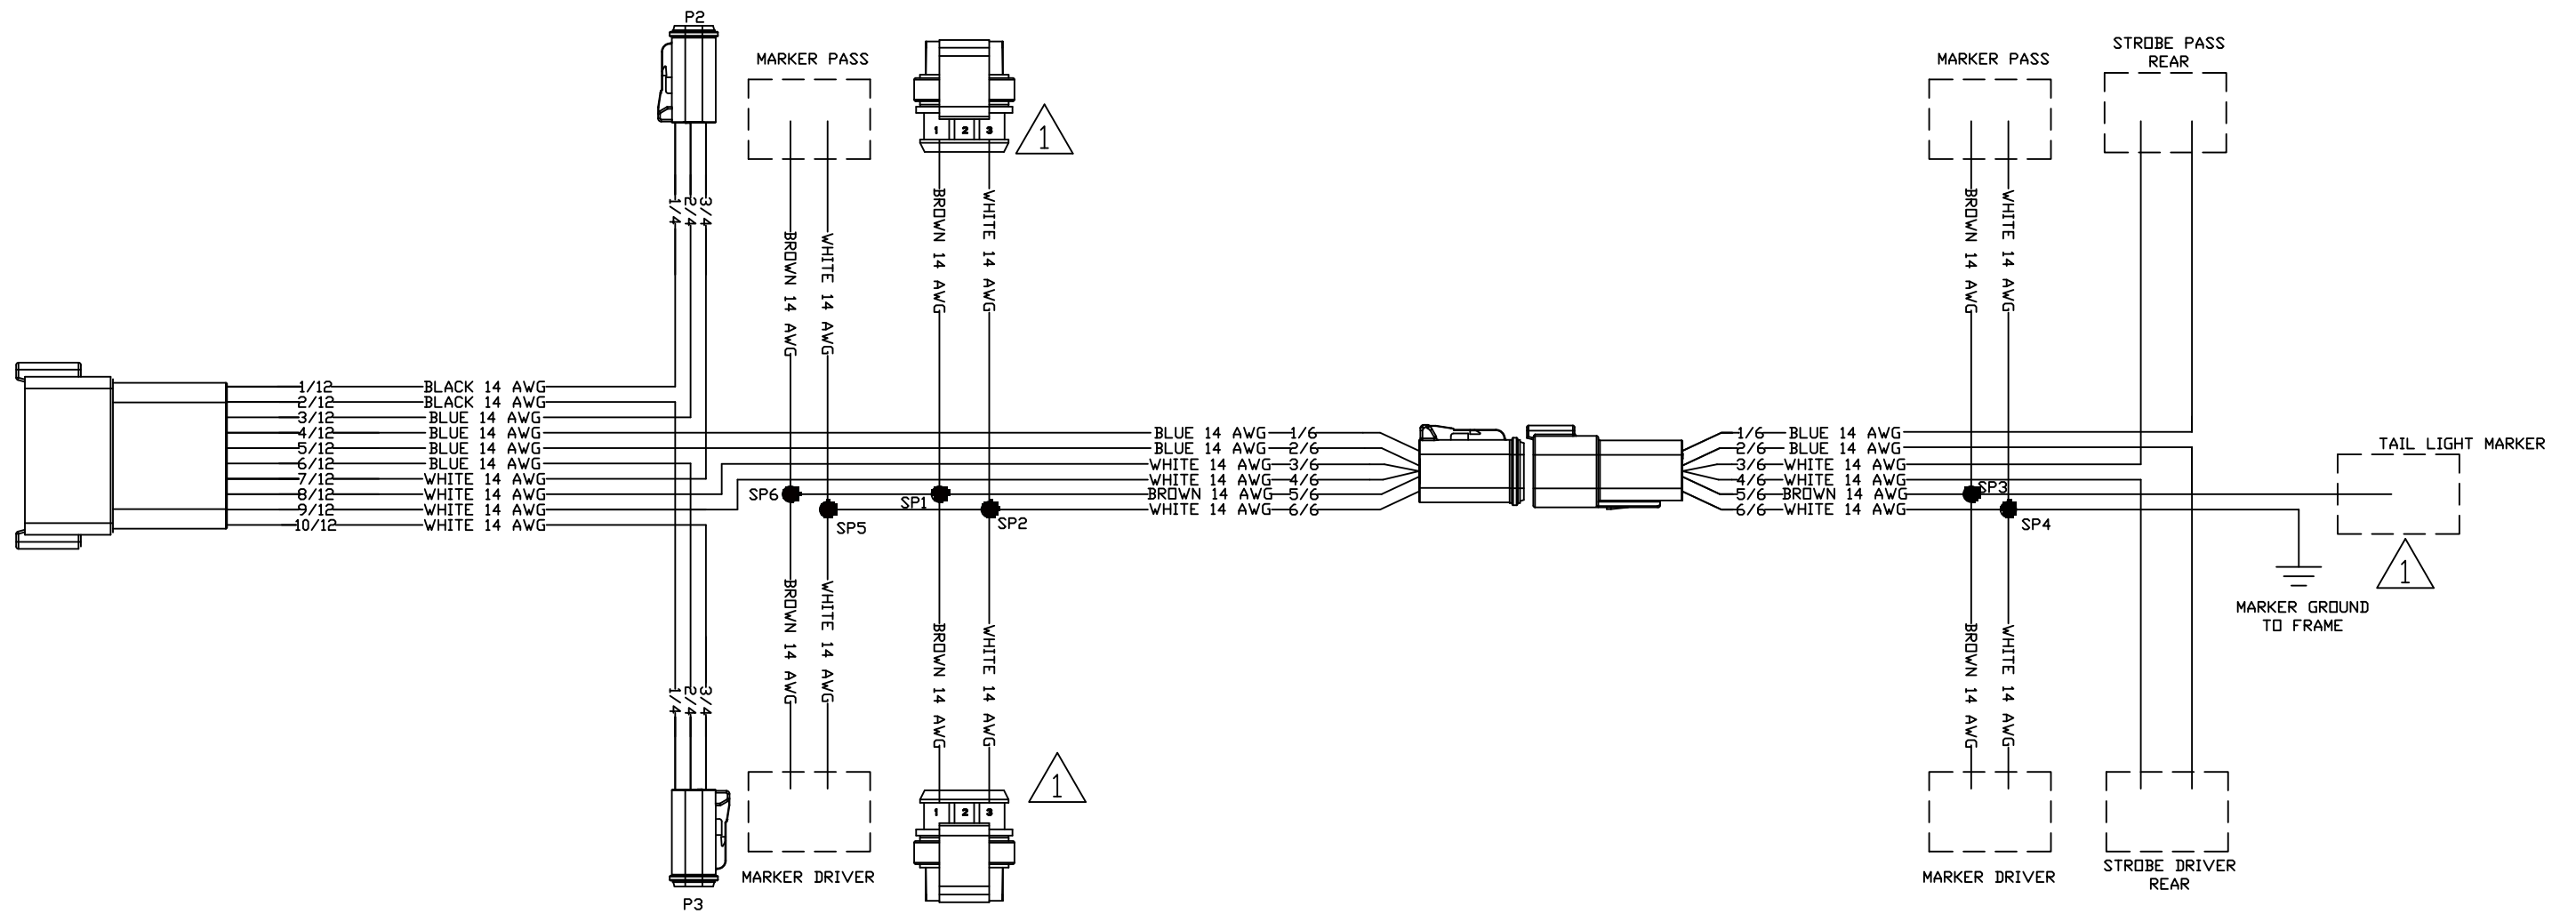


PART NO.	2187-1015	NAME	DATE	TITLE: AWP FLAT BED CHASSIS HARNESS		
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"	MODEL BY:	JS	4/4/2023			
	DRAWN BY:	JS	4/4/2023			
	MATERIAL					
PROCESS				SIZE	DRAWING NO.	REV
THICKNESS				B	2187-1015	1
UNITS		in		SCALE: NTS	WEIGHT:	SHEET 1 OF 3
DO NOT SCALE DRAWING						

NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT

- 1 ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCATION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 2 GXL BRAND WIRE SHALL BE USED


REVISION TABLE

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ADDED MARKER WIRING	06/06/2024	JS
	2	ADDED/FIXED DIMENSIONS	06/24/2024	JS

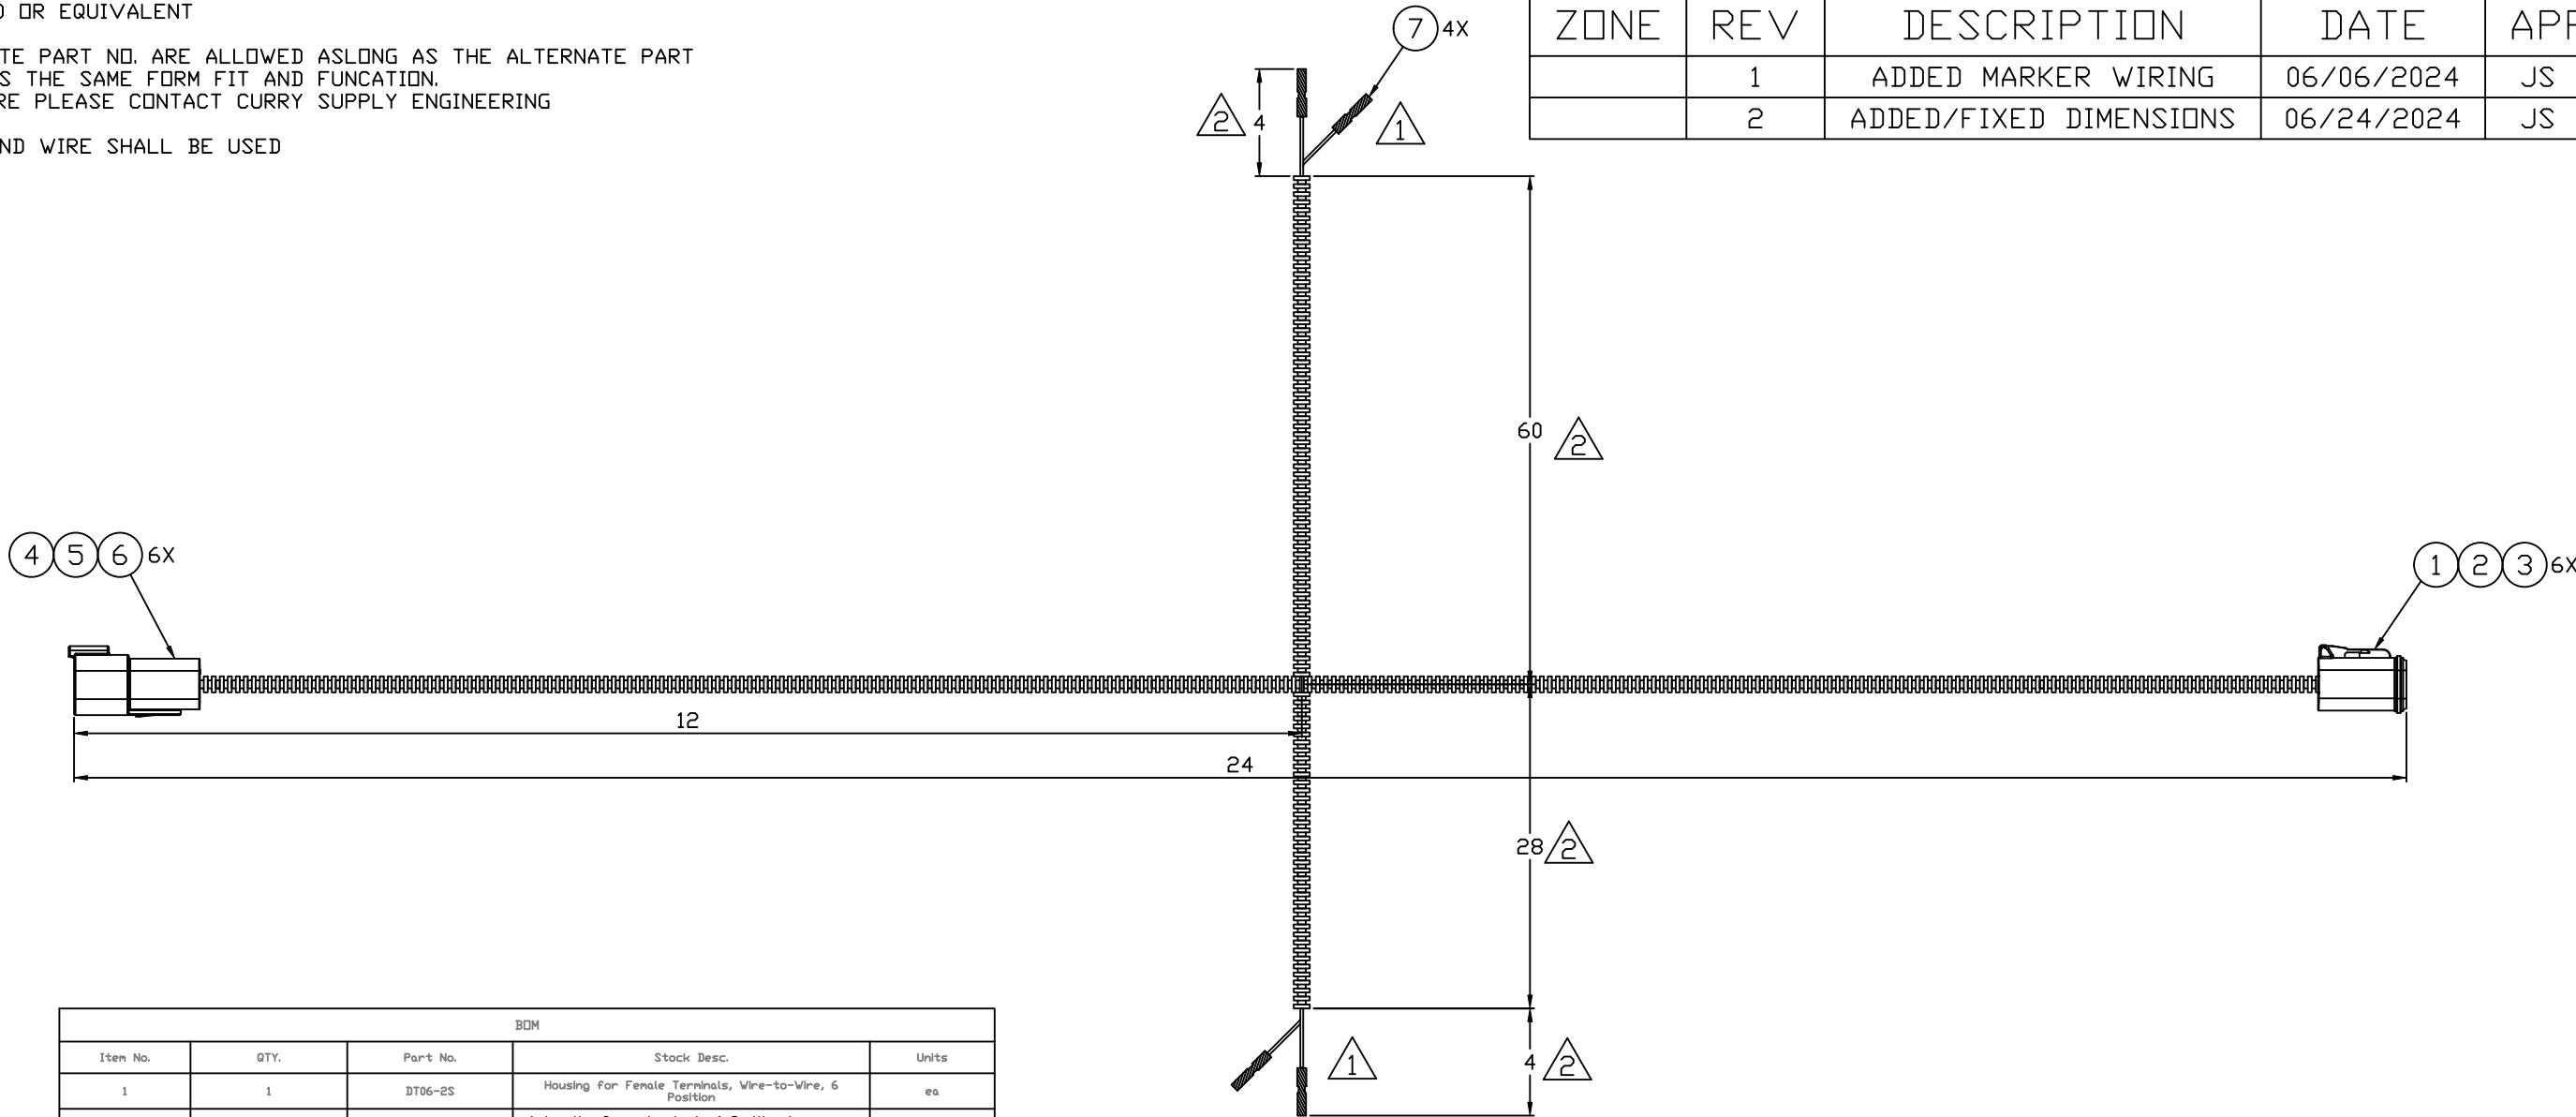

BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	DT06-2S	Housing for Female Terminals, Wire-to-Wire, 6 Position	ea.
2	1	V6S	Autonotive Connector Locks & Position Assurance, Secondary Lock	ea.
3	6	0462-209-16141	Autonotive Terminals, Socket, Pin Diameter 1.59 mm L063 InJ, 14 AWG Wire Size	ea.
4	1	DT04-6P	Housing for Male Terminals, Wire-to-Wire, 6 Position	ea.
5	1	V6P	Autonotive Connector Locks & Position Assurance, Secondary Lock	ea.
6	6	0460-215-16141	Autonotive Terminals, Pin, Pin Diameter	ea.
7	4	0747509	16-14 AWG Power Phase® .157" Blue Female Sealed Crimp Bullet Receptacle	ea.

PART NO.		2187-1016		NAME		DATE					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/4" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:		JS		4/13/2023					
		DRAWN BY:		JS		4/13/2023					
		MATERIAL									
		PROCESS						TITLE: 2FT EXTENSION MARKER			
		THICKNESS									
		UNITS		in		SIZE B		DRAWING NO. 2187-1016		REV 1	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.				DO NOT SCALE DRAWING		SCALE: NTS		WEIGHT:		SHEET 1 OF 2	

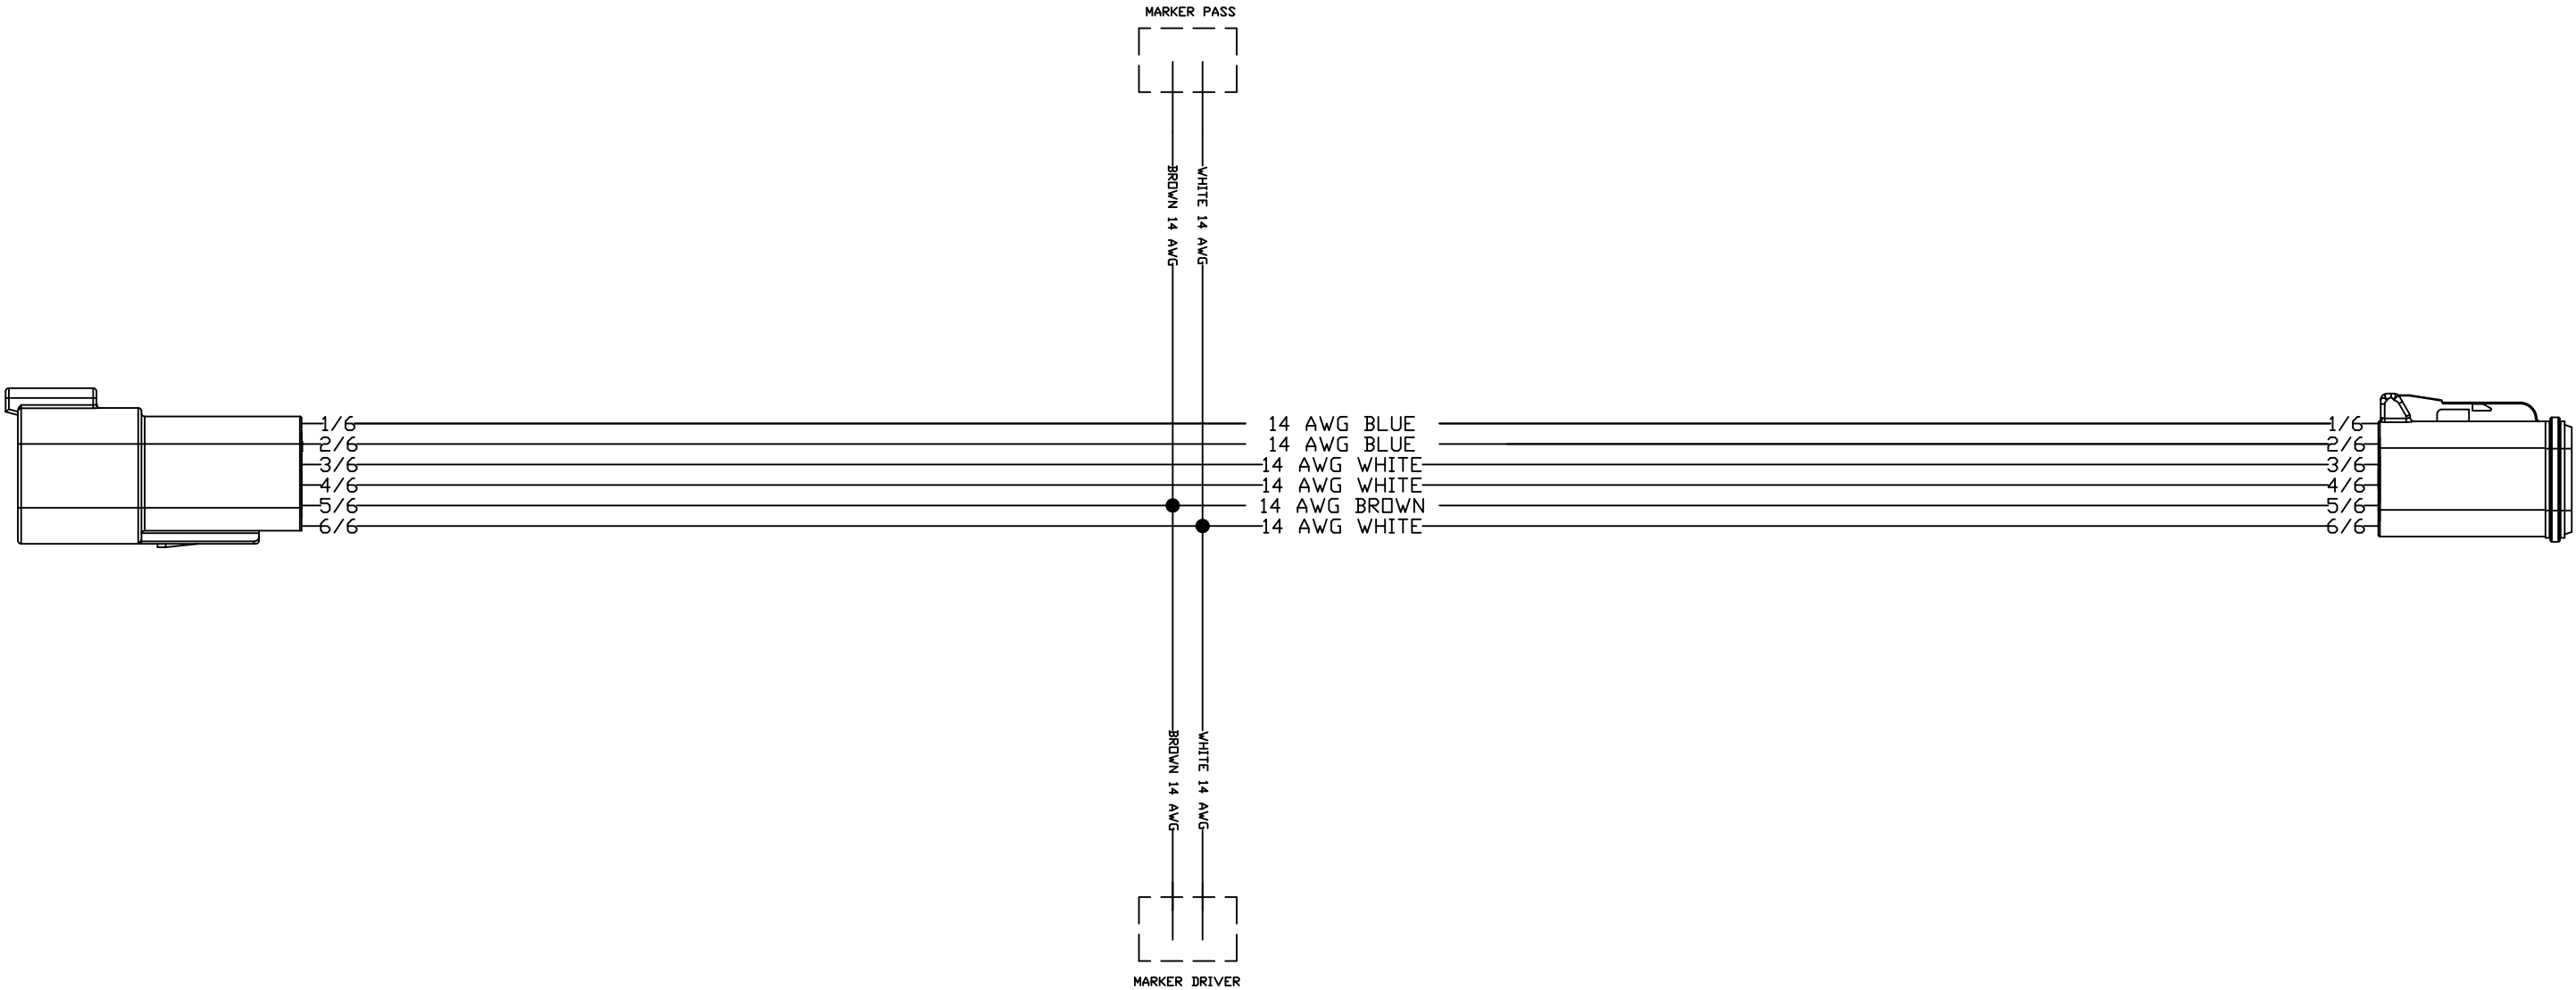


PART NO.	2187-1016		NAME	DATE	 TITLE: 2FT EXTENSION MARKER AWP		
		MODEL BY:	JS	4/13/2023			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/4" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"	DRAWN BY:	JS	4/13/2023				
	MATERIAL						
	PROCESS						
	THICKNESS						
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS		SIZE		DRAWING NO.	REV
		in		B		2187-1016	0
		DO NOT SCALE DRAWING		SCALE: NTS		WEIGHT:	SHEET 2 OF 2

NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT


- 1 ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART
PROVIDES THE SAME FORM FIT AND FUNCATION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 2 GXL BRAND WIRE SHALL BE USED

REVISION TABLE				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ADDED MARKER WIRING	06/06/2024	JS

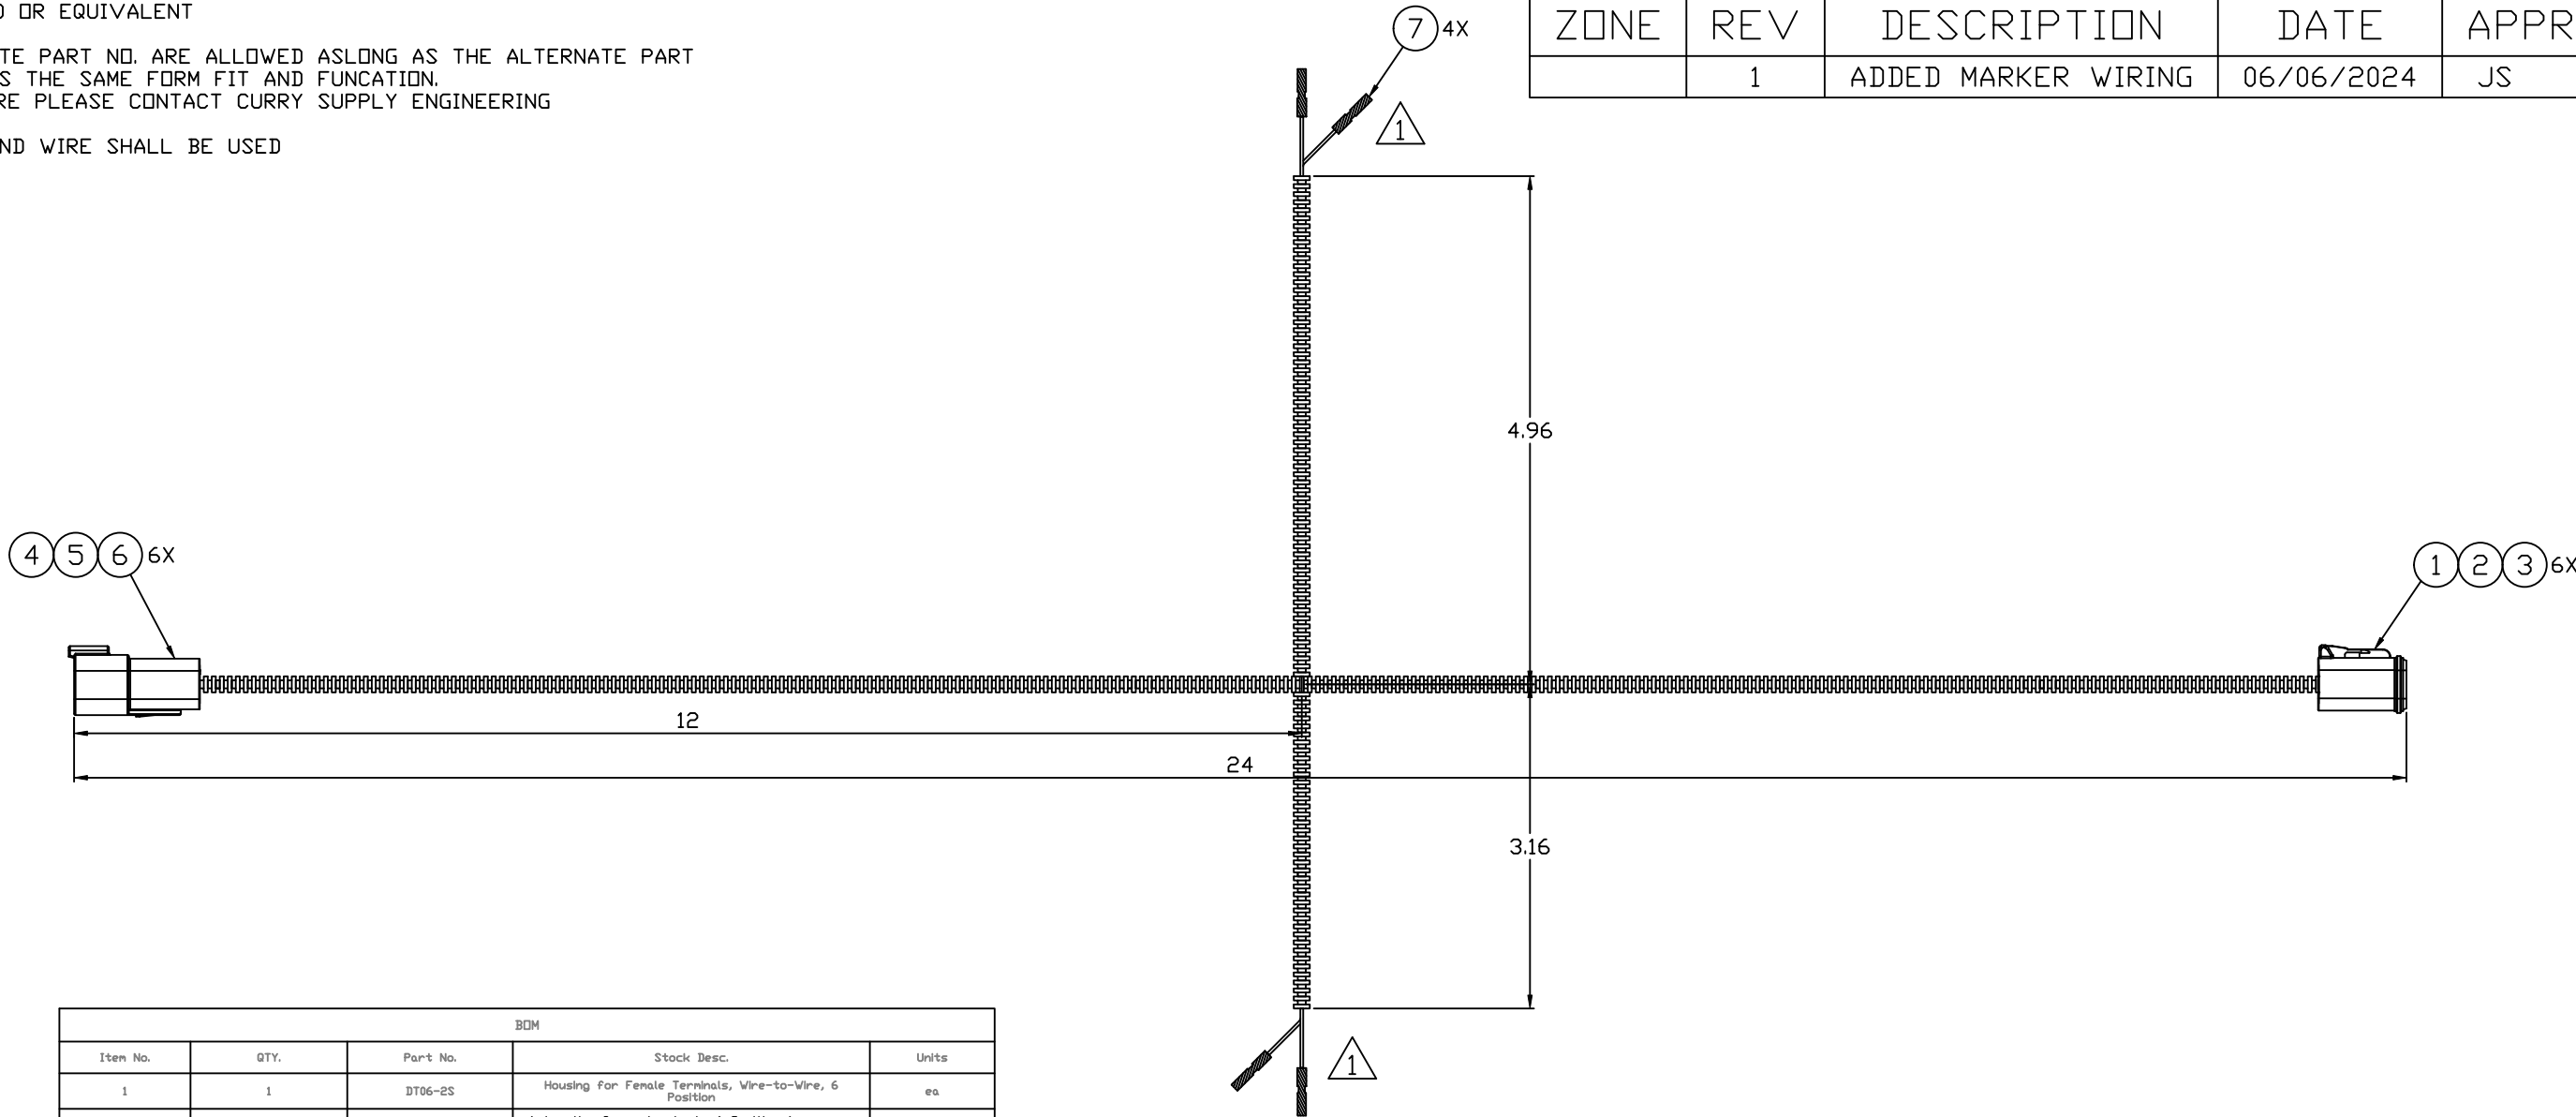


BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	DT06-2S	Housing for Female Terminals, Wire-to-Wire, 6 Position	ea
2	1	V6S	Autonotive Connector Locks & Position Assurance, Secondary Lock	ea
3	6	0462-209-16141	Autonotive Terminals, Socket, Pin Diameter 1.59 mm L063 InJ, 14 AWG Wire Size	ea
4	1	DT04-6P	Housing for Male Terminals, Wire-to-Wire, 6 Position	ea
5	1	V6P	Autonotive Connector Locks & Position Assurance, Secondary Lock	ea
6	6	0460-215-16141	Autonotive Terminals, Pin, Pin Diameter	ea
7	4	0747509	16-14 AWG Power Phase® .157" Blue Female Sealed Crimp Bullet Receptacle	ea

PART NO.		2187-1016		NAME		DATE		 TITLE: 2FT EXTENSION MARKER					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/4" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:		JS		4/13/2023							
		DRAWN BY:		JS		4/13/2023							
		MATERIAL											
		PROCESS											
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		THICKNESS						SIZE		DRAWING NO.		REV	
		UNITS						B		2187-1016		1	
		DO NOT SCALE DRAWING						SCALE: NTS		WEIGHT:		SHEET 1 OF 2	

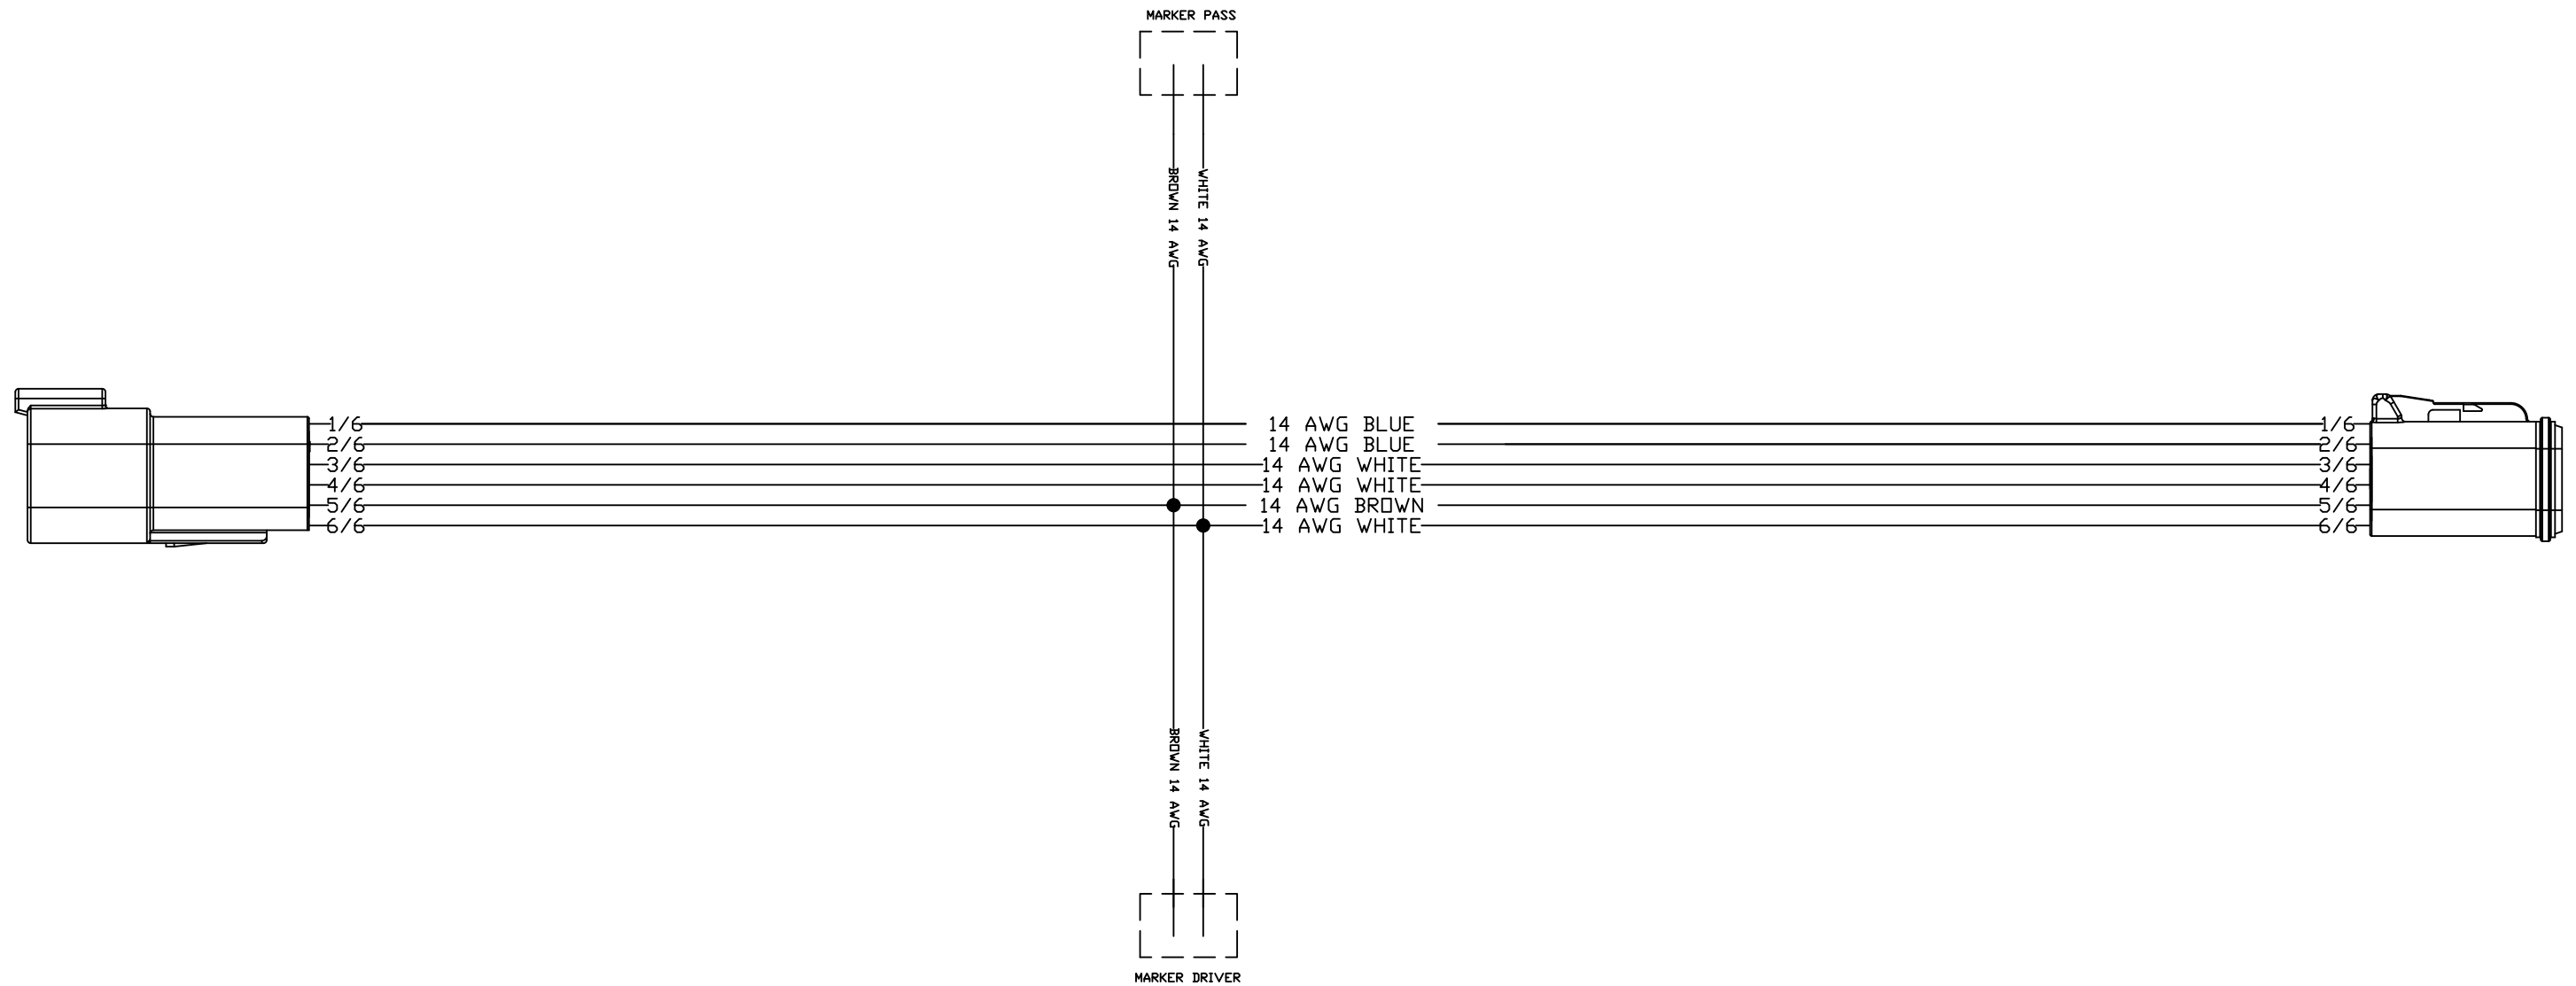


PART NO.		2187-1016		NAME		DATE		 TITLE: 2FT EXTENSION MARKER AWP					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/4" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"				MODEL BY:		JS 4/13/2023							
				DRAWN BY:		JS 4/13/2023							
				MATERIAL									
				PROCESS									
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.				THICKNESS				SIZE		DRAWING NO.		REV	
				UNITS				B		2187-1016		0	
				DO NOT SCALE DRAWING				SCALE: NTS		WEIGHT:		SHEET 2 OF 2	

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT
- 1 ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART
PROVIDES THE SAME FORM FIT AND FUNCATION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 2 GXL BRAND WIRE SHALL BE USED

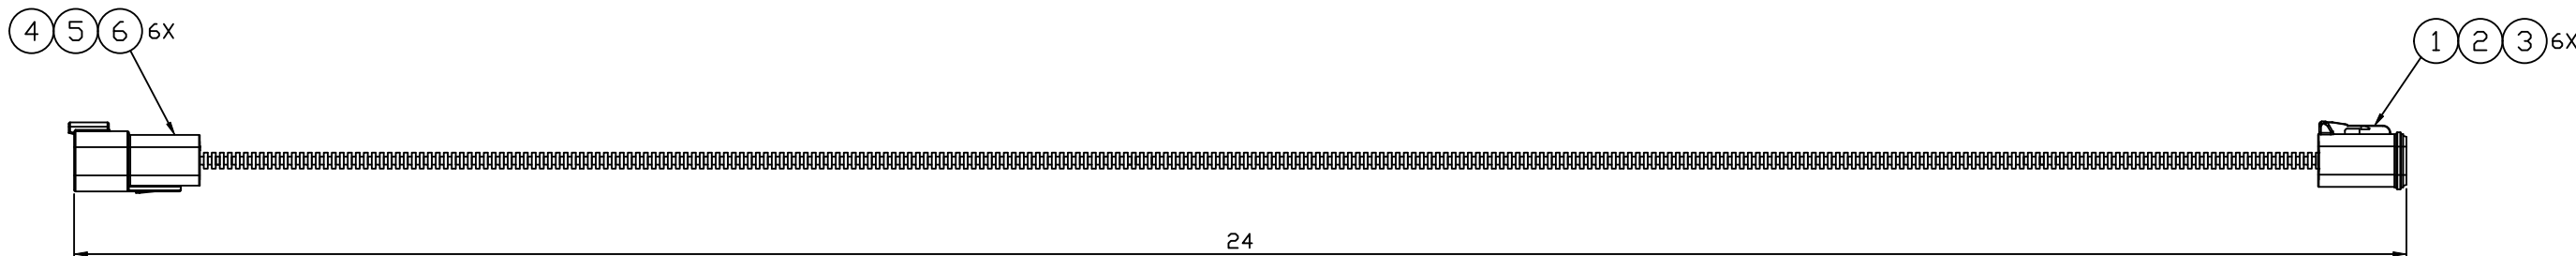

BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	DT06-2S	Housing for Female Terminals, Wire-to-Wire, 6 Position	ea
2	1	V6S	Automotive Connector Locks & Position Assurance, Secondary Lock	ea
3	6	0462-209-16141	Automotive Terminals, Socket, Pin Diameter 1.59 mm L063 InJ, 14 AWG Wire Size	ea
4	1	DT04-6P	Housing for Male Terminals, Wire-to-Wire, 6 Position	ea
5	1	V6P	Automotive Connector Locks & Position Assurance, Secondary Lock	ea
6	6	0460-215-16141	Automotive Terminals, Pin, Pin Diameter	ea

PART NO.	2187-1016		NAME	DATE			
		MODEL BY:	JS	4/13/2023			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/4" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY:	JS	4/13/2023	TITLE: 2FT EXTENSION MARKER		
		MATERIAL					
		PROCESS					
		THICKNESS					
		UNITS in					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		DO NOT SCALE DRAWING			SIZE B	DRAWING NO. 2187-1016	REV 0
					SCALE: NTS	WEIGHT:	SHEET 1 OF 2

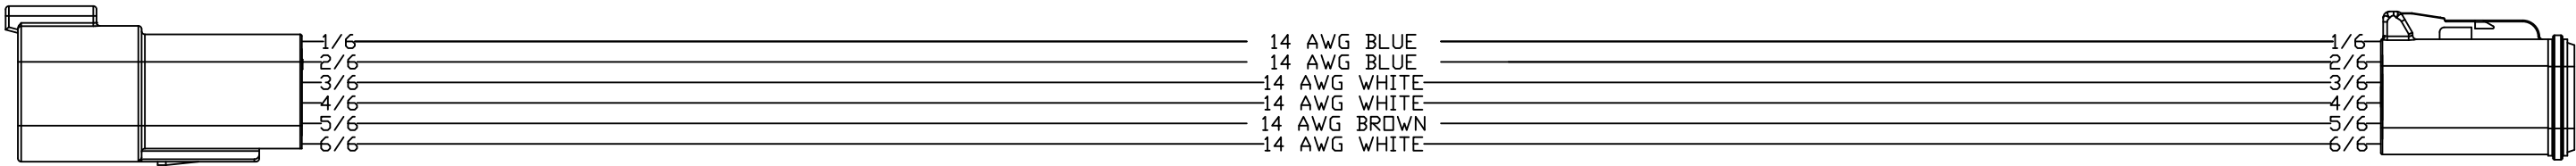


PART NO.		2187-1016		NAME		DATE		 TITLE: 2FT EXTENSION MARKER AWP							
TOLERANCES:		UNLESS OTHERWISE SPECIFIED:		MODEL BY:		JS						4/13/2023			
FRACTIONAL:		± 1/4"		DRAWN BY:		JS						4/13/2023			
ANGULAR:		± 1°		MATERIAL											
TWO PLACE DECIMAL		± .01"		PROCESS						SIZE		DRAWING NO.		REV	
THREE PLACE DECIMAL		± .005"		THICKNESS						B		2187-1016		0	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.				UNITS		in		DO NOT SCALE DRAWING		SCALE: NTS		WEIGHT:		SHEET 2 OF 2	

NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT


1 ALTERNATE PART NO. ARE ALLOWED AS LONG AS THE
ALTERNATE PART PROVIDES THE SAME FORM FIT AND
FUNCATION. IF UNSURE PLEASE CONTACT CURRY SUPPLY
ENGINEERING

2 LEAVE 4" OF WIRE AFTER EACH
RUN OF LOOM

BOM				
Item No.	QTY.	Part No.	Stock Desc.	Units
1	22	0747509	16-14 AWG FEMALE BULLET CONNECTOR	ea
2	641	MTW-14-WHITE	WHITE 14 AWG GXL	in
3	641	MTW-14-BROWN	BROWN 14 AWG GXL	in
4	593	0708151	1/4 POLYETHYLENE SLIT WIRE LOOM	in

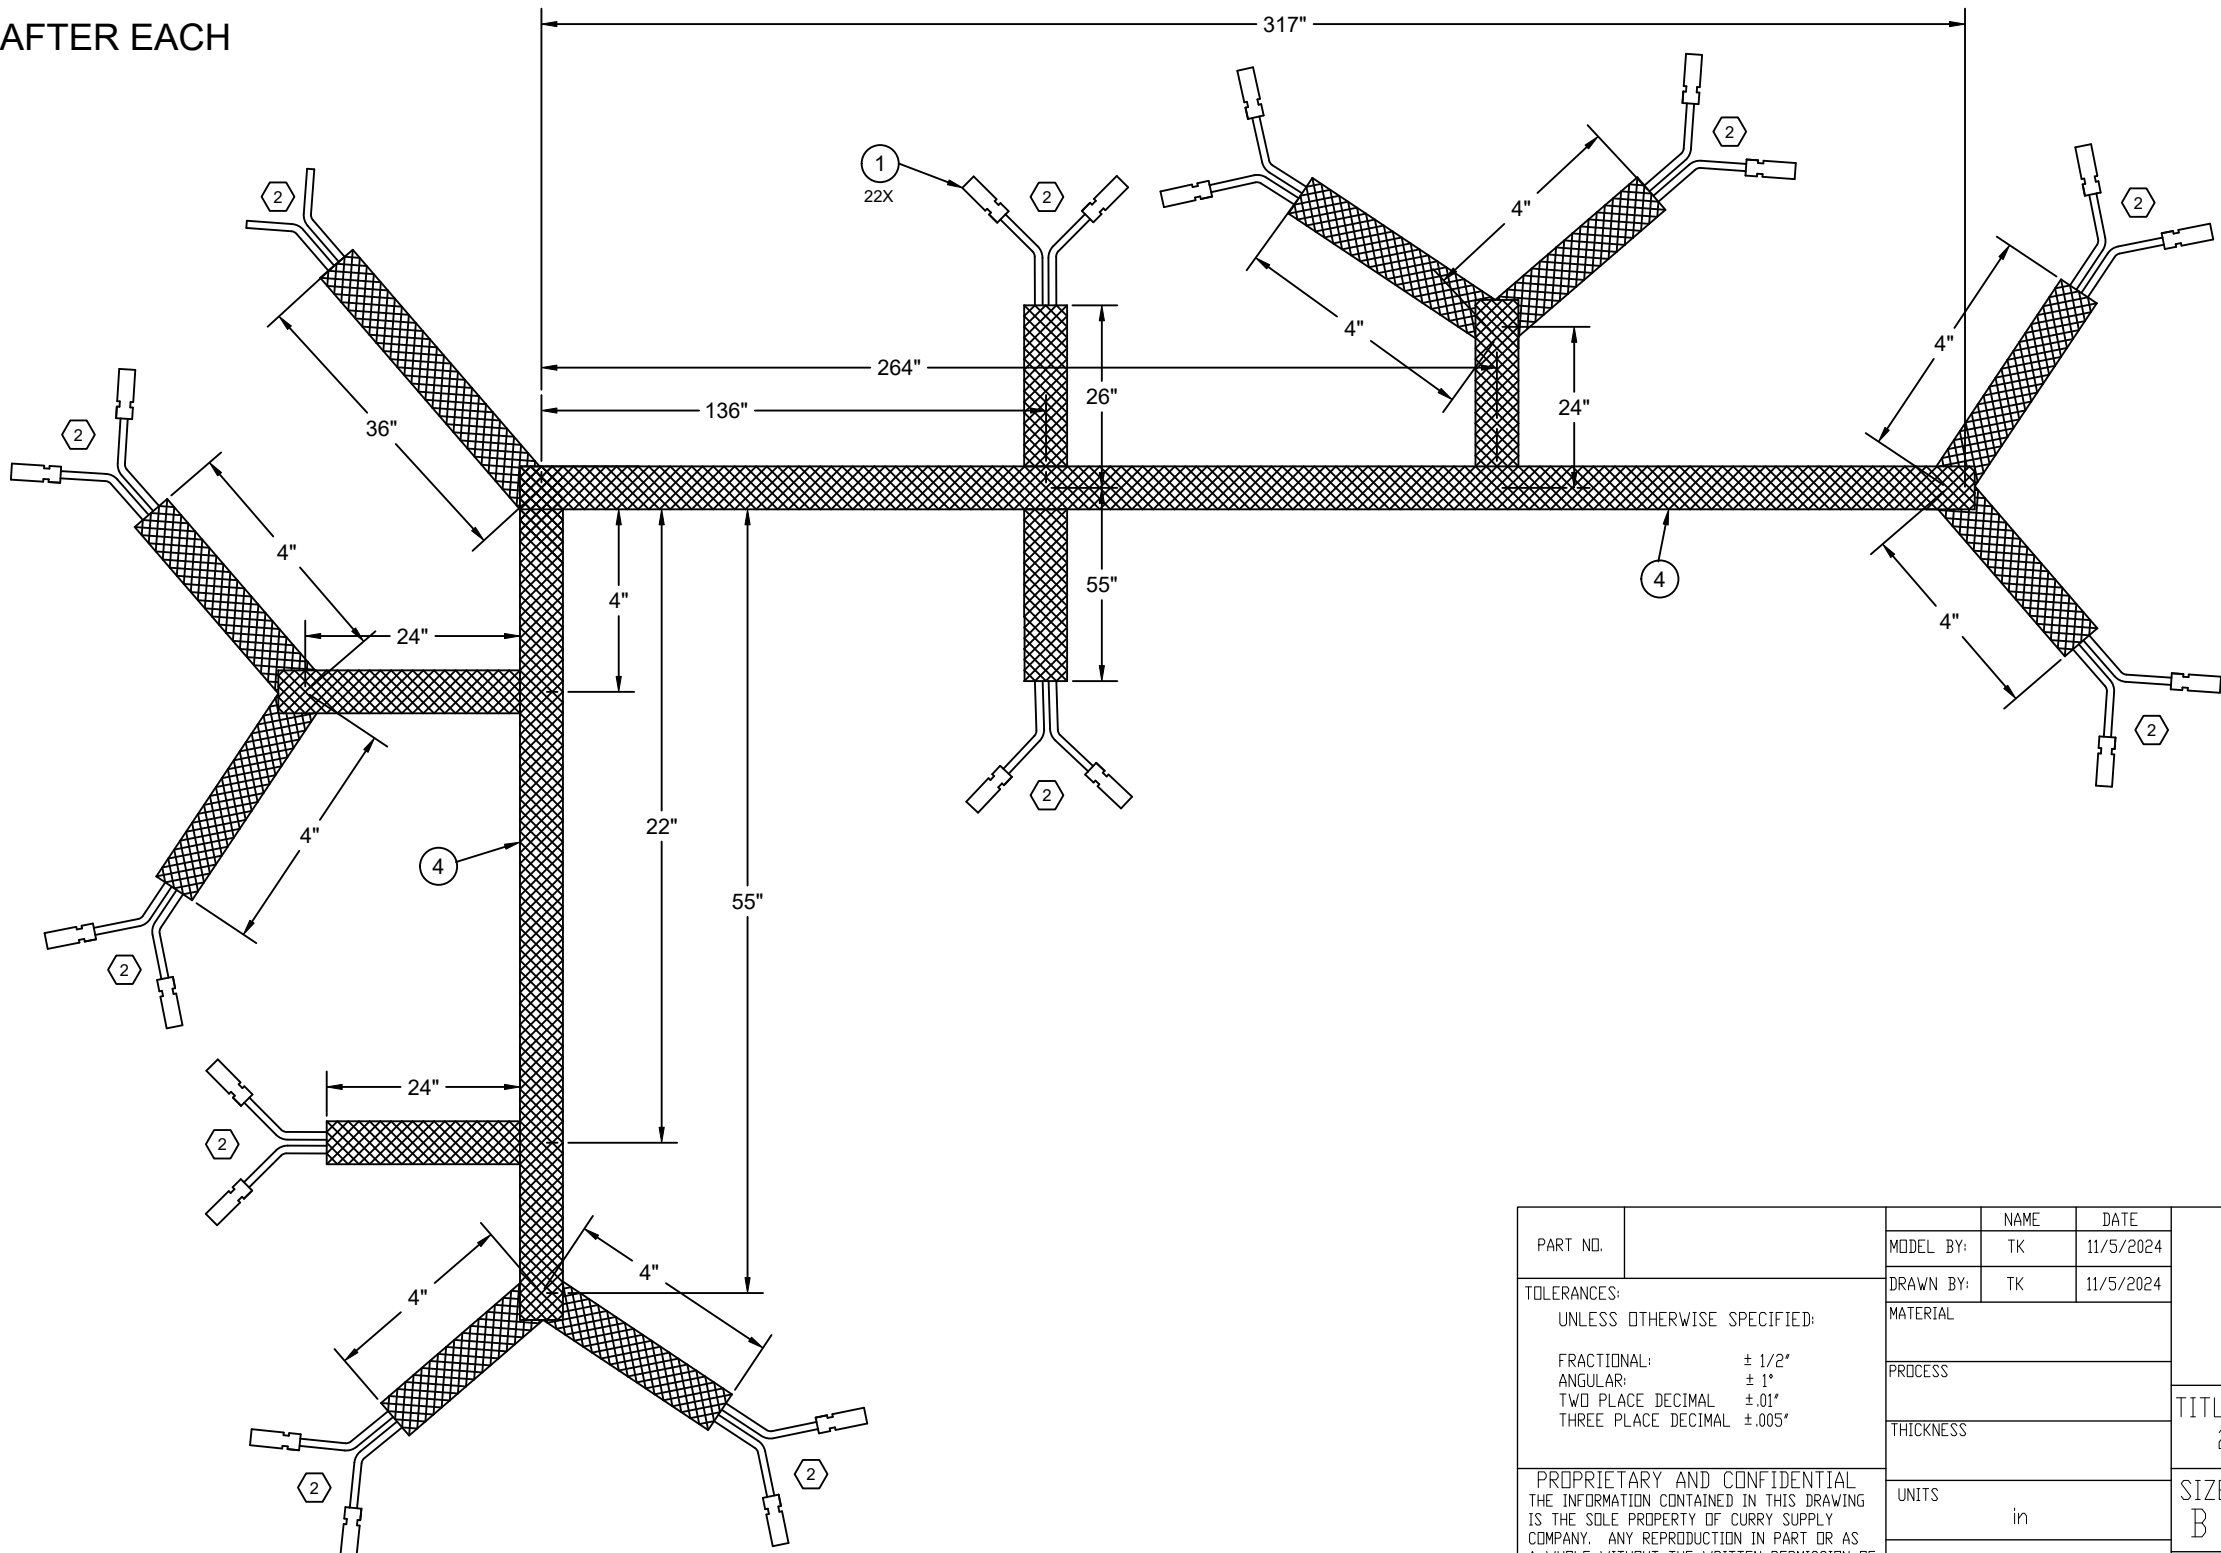

PART NO.		MODEL BY:	NAME	DATE				
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY:	TK	11/5/2024				
		MATERIAL						
		PROCESS						
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		THICKNESS			TITLE: 22' Flatbed Marker Light Harness			
		UNITS in			SIZE B	DRAWING NO. 2187-1019		
		DO NOT SCALE DRAWING			SCALE: 1:2	WEIGHT:		
					REV 0			
					SHEET 1 OF 2			

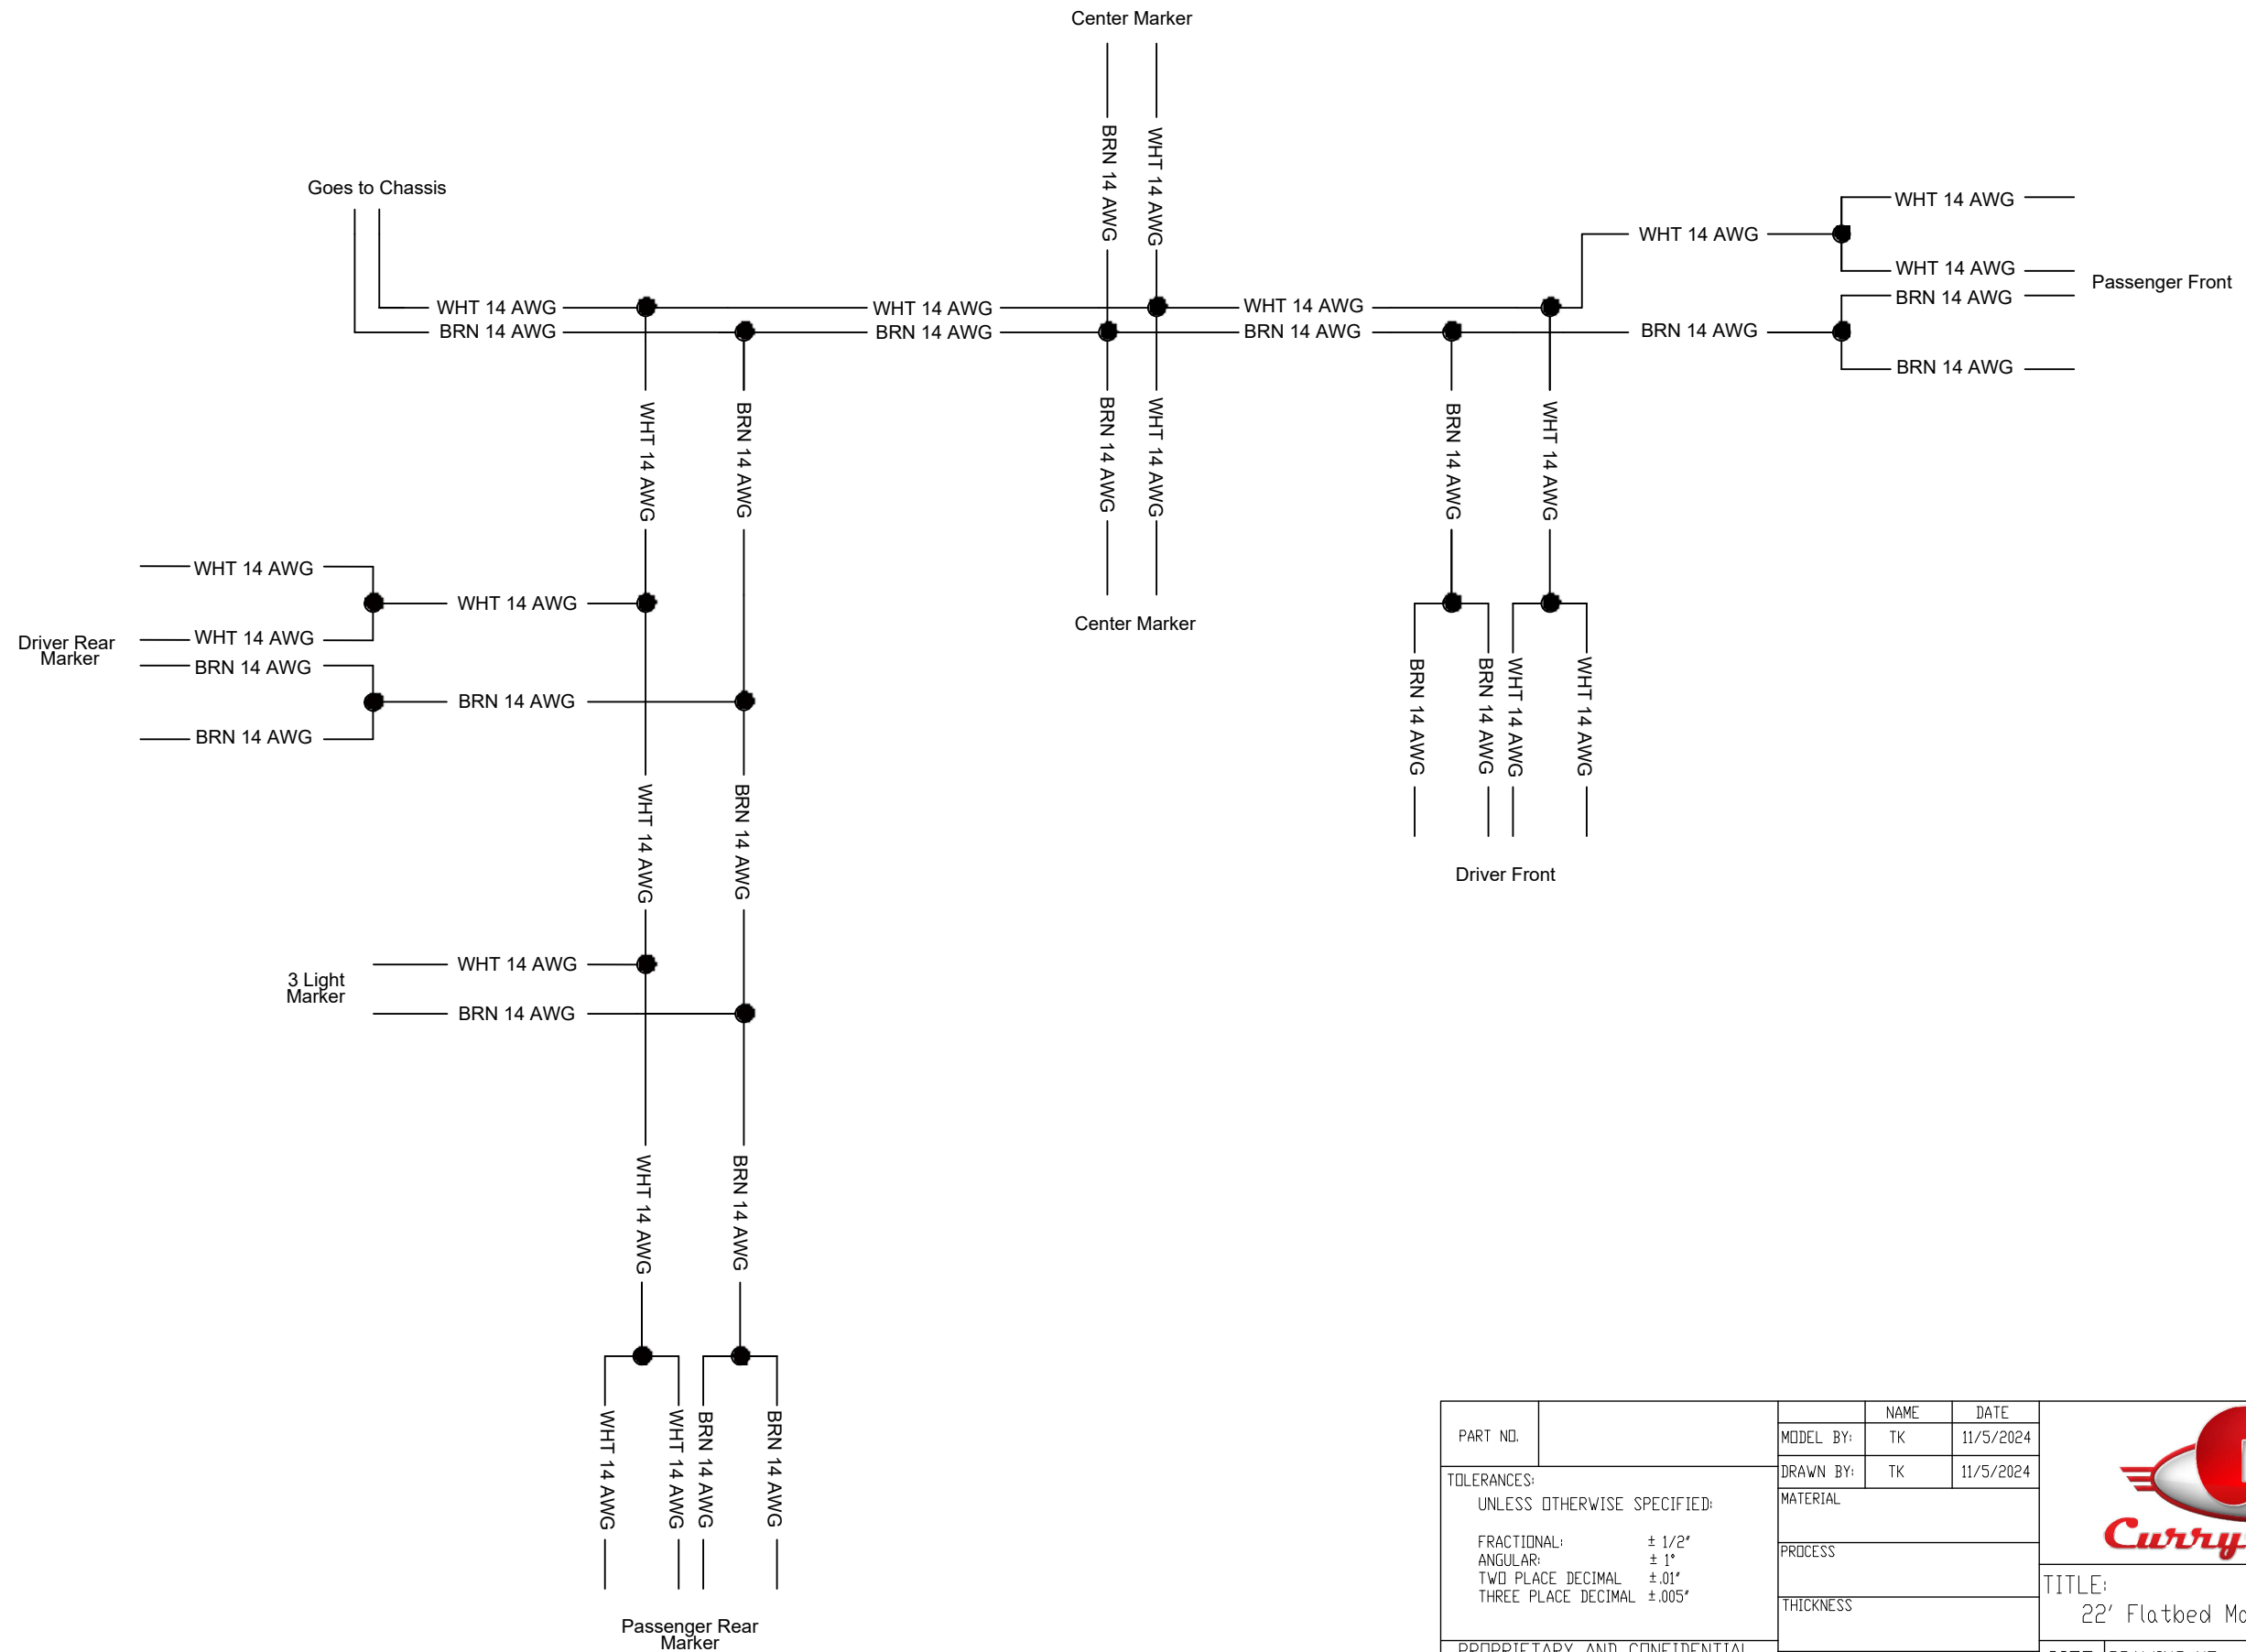


PART NO.		NAME		DATE									
		MODEL BY:	TK	11/5/2024									
		DRAWN BY:	TK	11/5/2024									
		MATERIAL											
TOLERANCES: UNLESS OTHERWISE SPECIFIED:						TITLE: 22' Flatbed Marker Light Harness							
FRACTIONAL: ± 1/2"													
ANGULAR: ± 1°													
TWO PLACE DECIMAL ± .01"						SIZE B				DRAWING NO. 2187-1019		REV 0	
THREE PLACE DECIMAL ± .005"													
THICKNESS						SCALE: 1:2		WEIGHT:		SHEET 2 OF 2			
UNITS in													
DO NOT SCALE DRAWING													
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.													

NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620 OR EQUIVALENT


1 ALTERNATE PART NO. ARE ALLOWED AS LONG AS THE
ALTERNATE PART PROVIDES THE SAME FORM FIT AND
FUNCATION. IF UNSURE PLEASE CONTACT CURRY SUPPLY
ENGINEERING

2 LEAVE 4" OF WIRE AFTER EACH
RUN OF LOOM

Item No.	QTY.	Part No.	Stock Desc.	Units
1	22	BFN-164	16-14 AWG BULLET CONNECTOR	ea
2	569	14 GXL	WHITE 14 AWG GXL	in
3	569	14 GXL	BROWN 14 AWG GXL	in
4	521	1UXW8	3/8 EXPANDO (BRADDED SLEEVE)	in


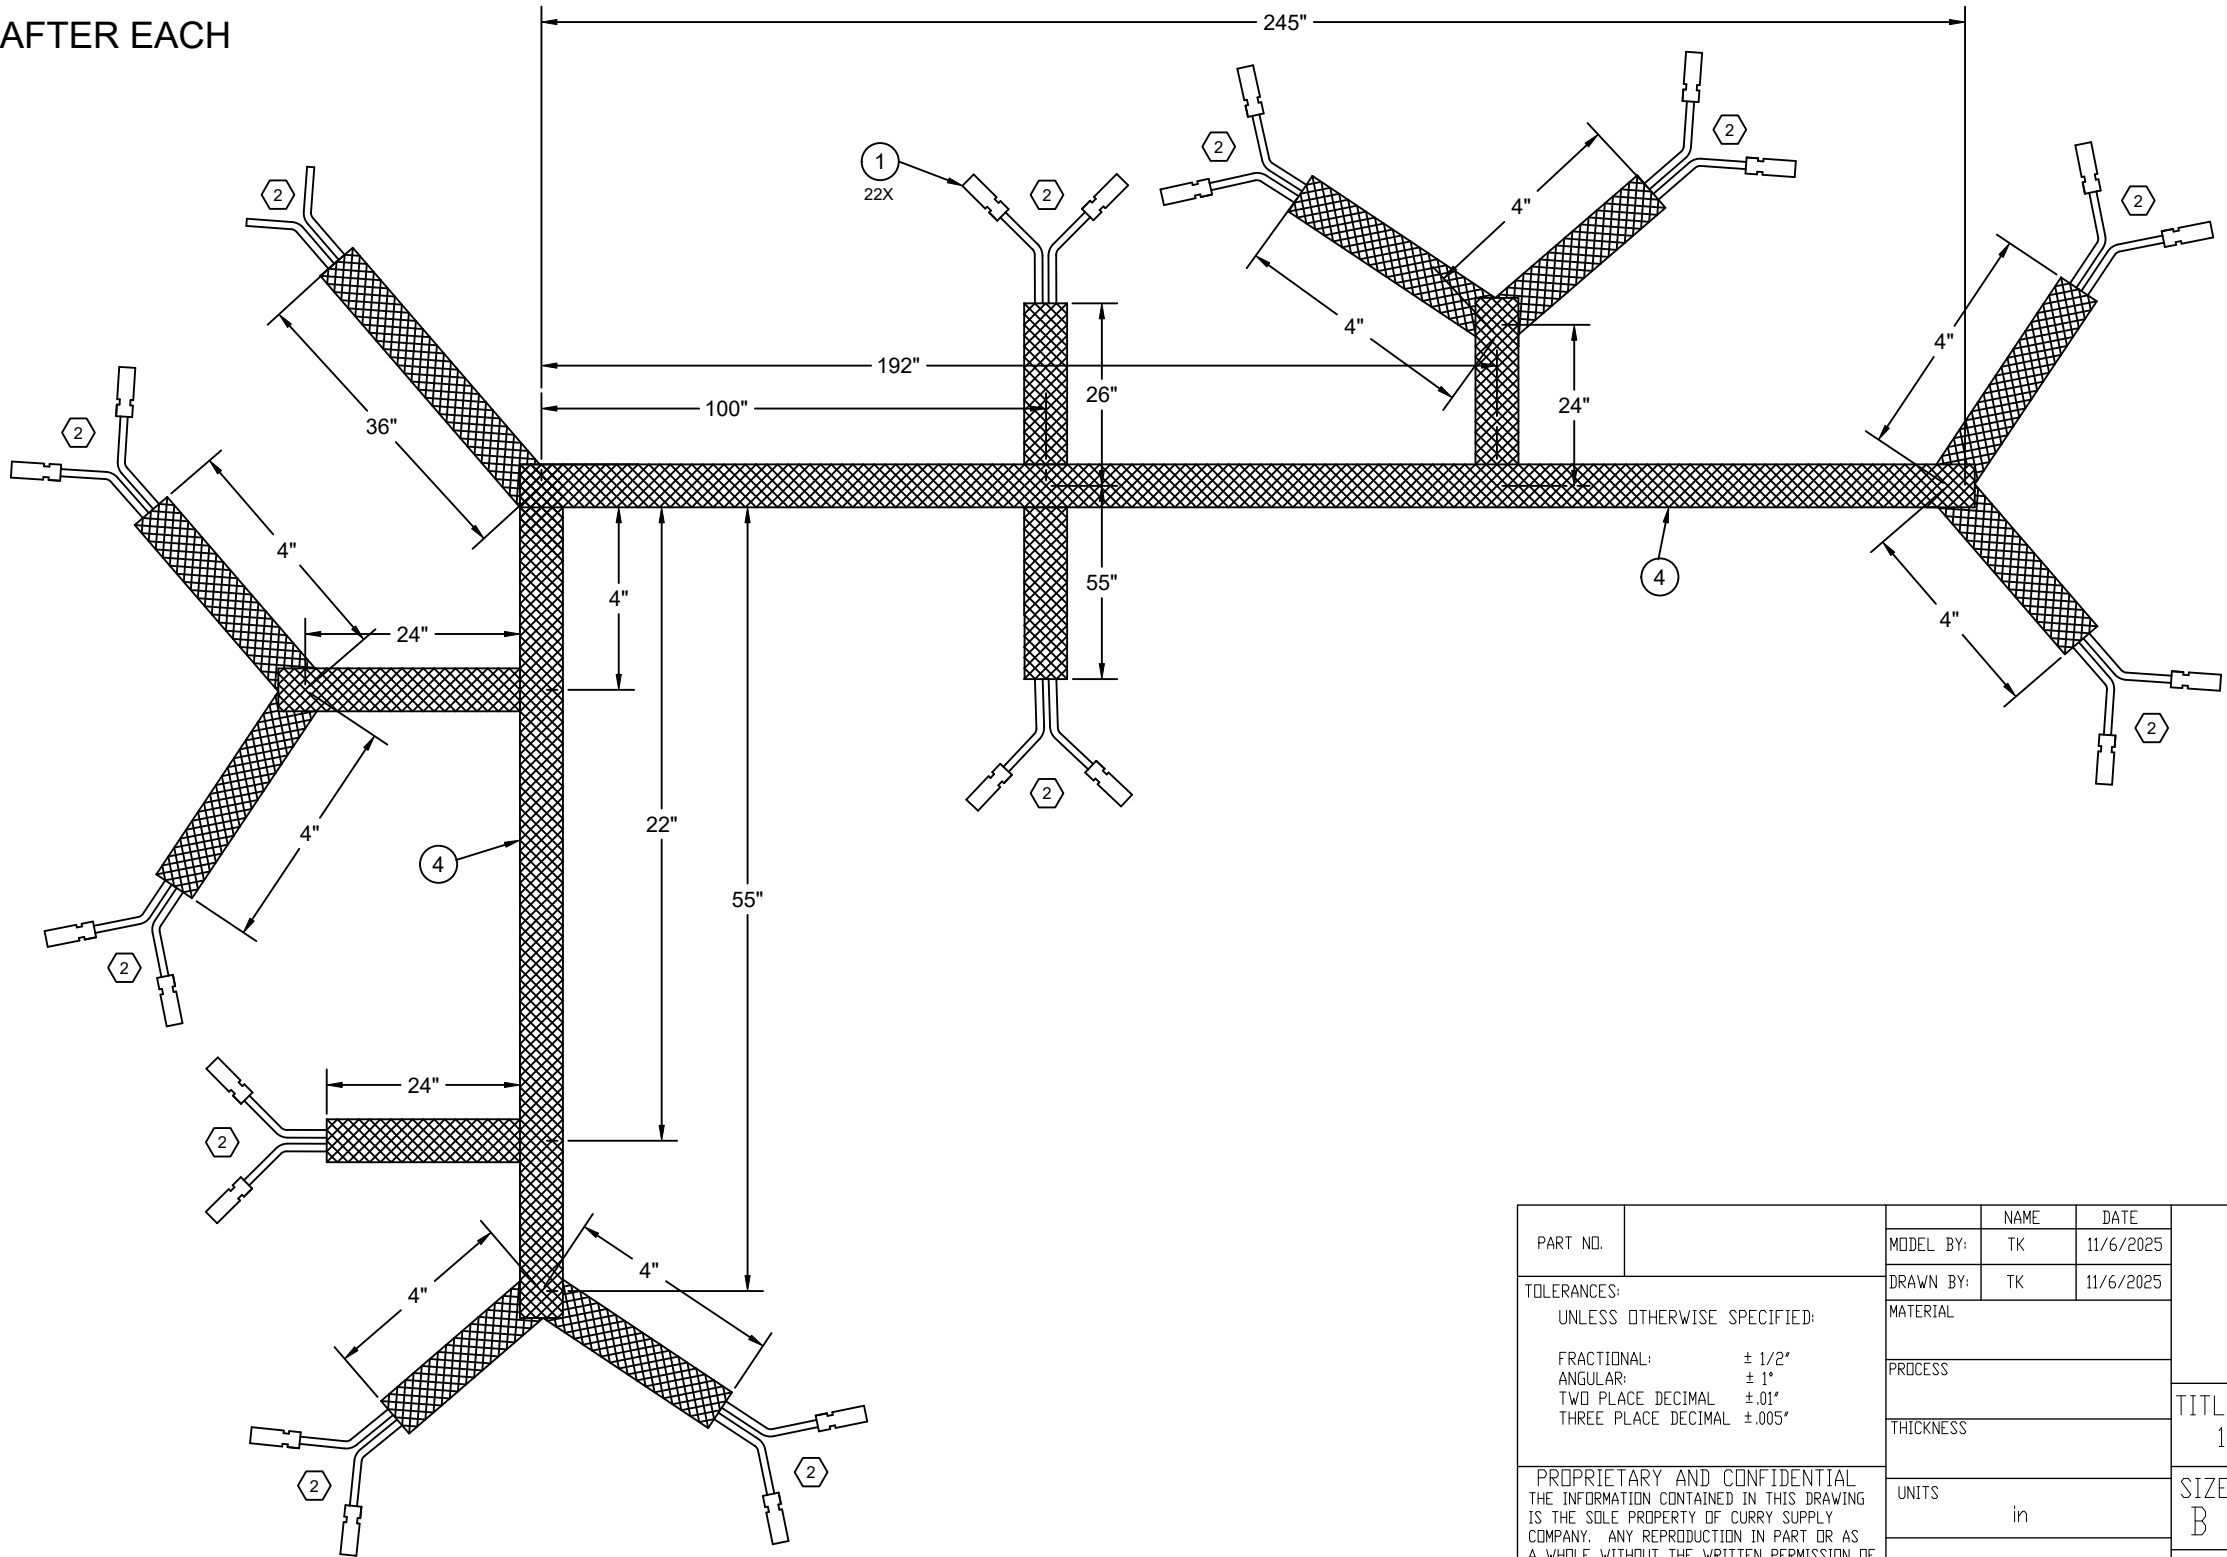


PART NO.		NAME					
		MODEL BY: TK 11/6/2025					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1" TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY: TK 11/6/2025					
		MATERIAL					
		PROCESS					
		THICKNESS					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS in		TITLE: 16' Flatbed Marker Light Harness			
		DO NOT SCALE DRAWING		SIZE B	DRAWING NO. 2187-1039	REV 0	
				SCALE: 1:2		WEIGHT:	SHEET 1 OF 2

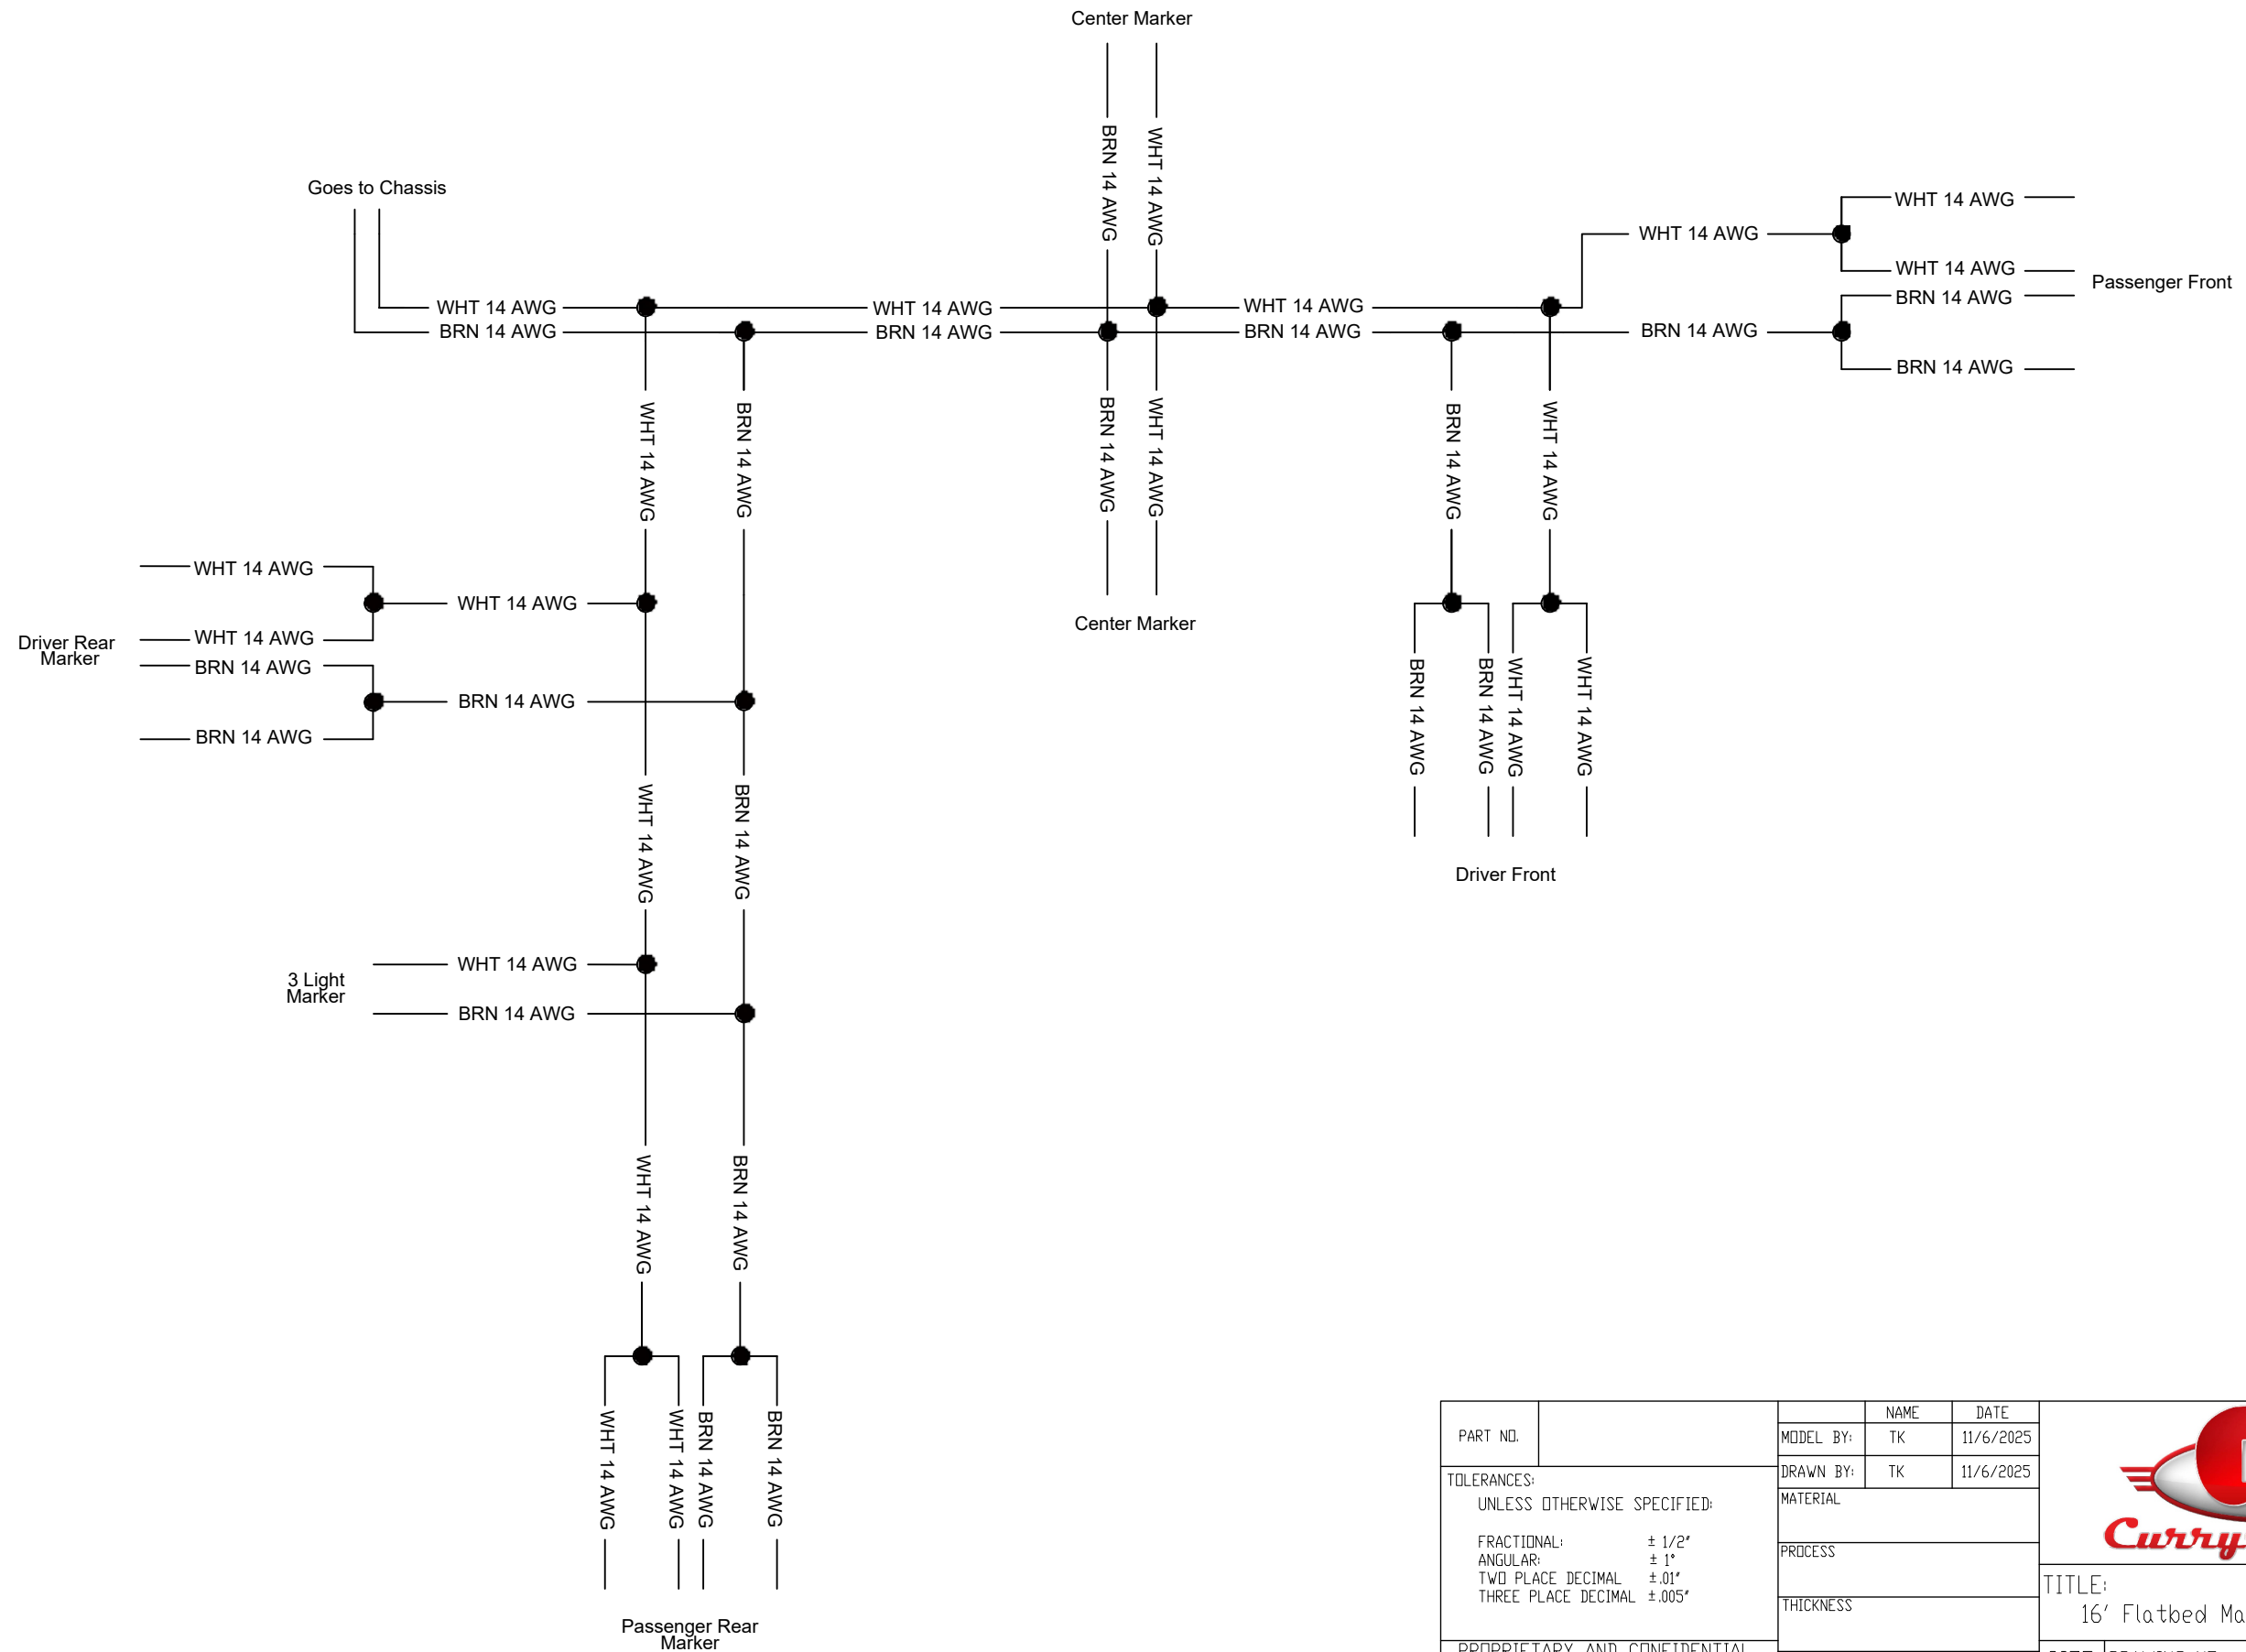





PART NO.		NAME		DATE									
		MODEL BY:		TK 11/6/2025									
		DRAWN BY:		TK 11/6/2025									
		MATERIAL											
TOLERANCES: UNLESS OTHERWISE SPECIFIED:						PROCESS							
FRACTIONAL: ± 1/2'						TITLE: 16' Flatbed Marker Light Harness							
ANGULAR: ± 1°													
TWO PLACE DECIMAL ± .01'													
THREE PLACE DECIMAL ± .005'						THICKNESS							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.						UNITS		SIZE		DRAWING NO.		REV	
						in		B		2187-1039		0	
						SCALE: 1:2		WEIGHT:		SHEET 2 OF 2			

ITEM NO.	QTY.	PART NO.	Stock No.	STOCK DESC.	Stock Qty	Units
1	3	LS71.261	LS71.261	SLAT, LINER, 71.261"	1	ea
2	2	1744-77001	PL11GASTL	SHEET, STEEL, 11 GA, ASTM A1011	13	lbs
3	1	1744-77002	PL11GASTL	SHEET, STEEL, 11 GA, ASTM A1011	12	lbs
4	1	1560-9001	1560-9001	SPRING LATCH	1	ea
5	1	1560-9003	1560-9003	LATCH BRACKET	1	ea
6	2	5	B2588B	Side Plate for B2588B	1	ea

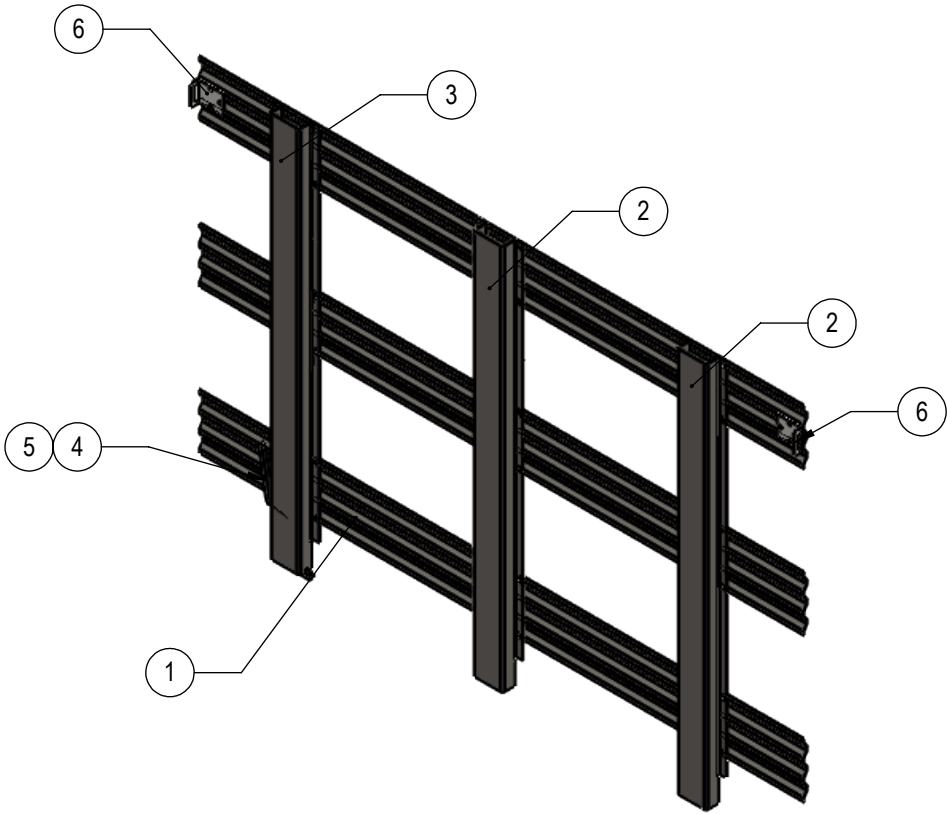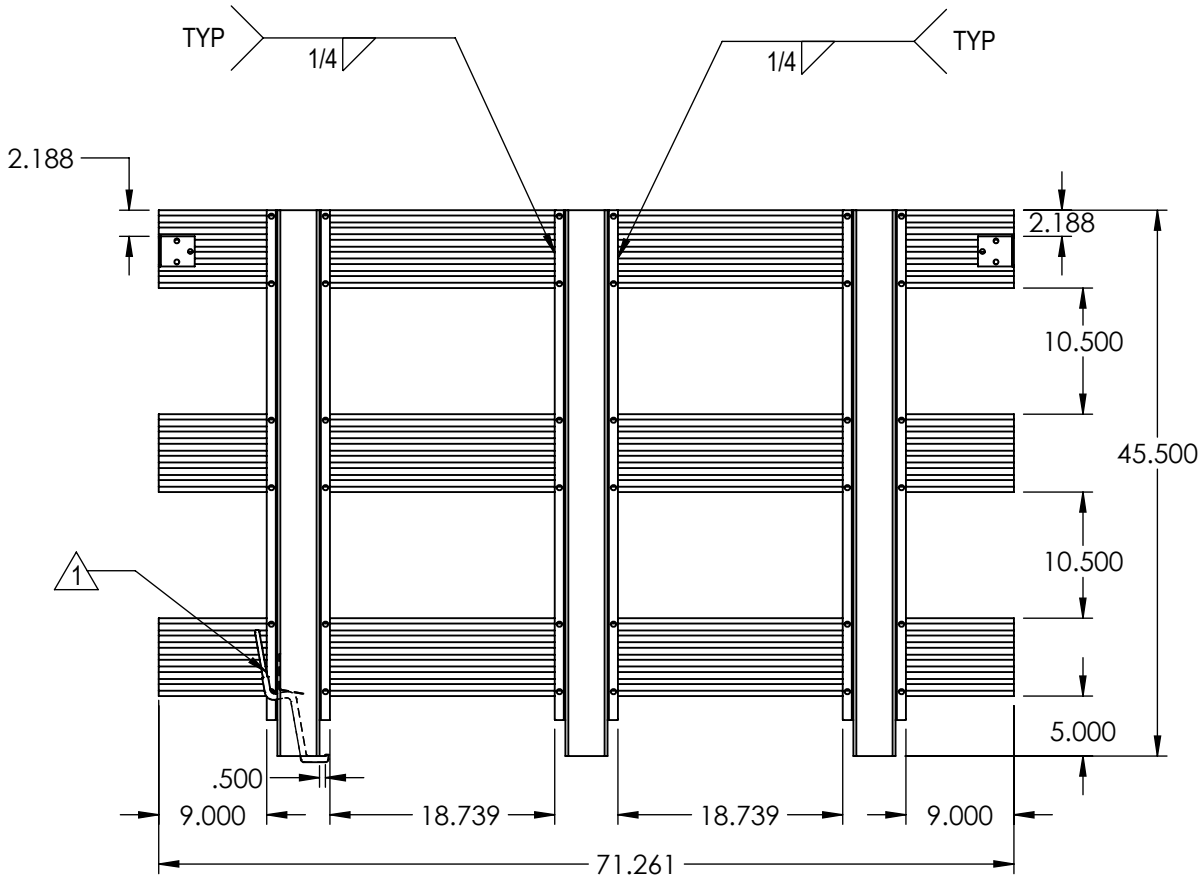







REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	APPROVED	ECR #
A4	1	ADDED 1560-9001 AND 1560-9003, SPRING LATCH	4/21/2022	RK	2040
	2	Lengthened latch cutout in -77002	3/5/2024	JB	ECO24-016

PART NO.		1744-77000										
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/8" ANGULAR: ± 1° TWO PLACE DECIMAL ±.01" THREE PLACE DECIMAL ±.005"							MODEL BY:	RK	DATE	11/26/2021		
							DRAWN BY:	RK	11/26/2021			
							MATERIAL					
							ASM					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.				TITLE:			SIDE STAKES					
				THICKNESS		SIZE B			DRAWING NO. 1744-77000		REV 2	
				UNITS in								
DO NOT SCALE DRAWING				SCALE: 1:16		WEIGHT: 63.73		SHEET 1 OF 3				

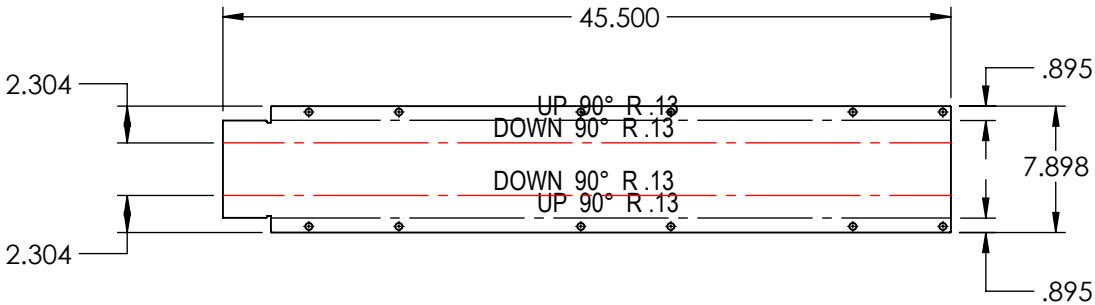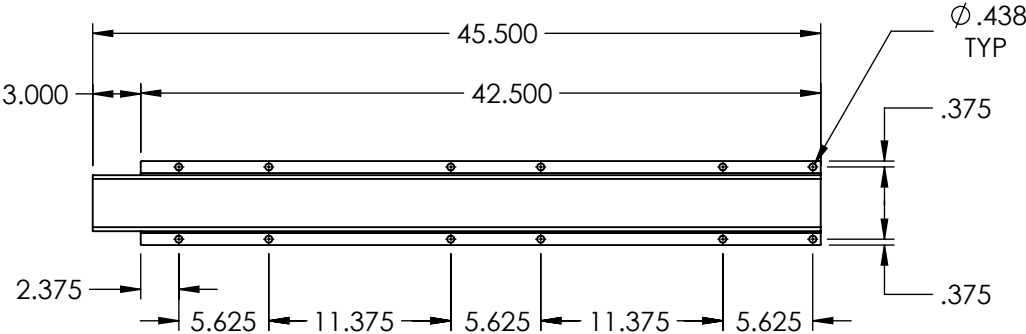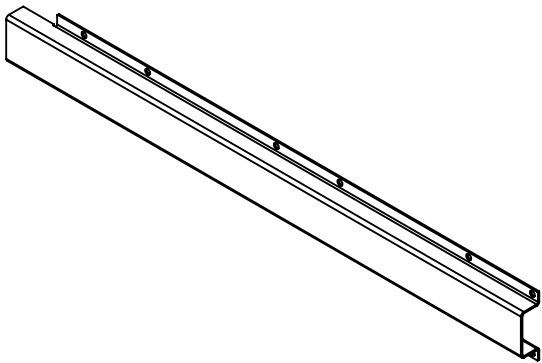


FLAT PATTERN

PART NO.		1744-77001							
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/8" ANGULAR: ± 1° TWO PLACE DECIMAL ±.01" THREE PLACE DECIMAL ±.005"		MODEL BY:	RK				11/26/2021		
		DRAWN BY:	RK				11/26/2021		
		MATERIAL					ASTM A36 Steel		
		PROCESS	B,P- Burn,Bend		TITLE: SHEET, STEEL, 11 GA, ASTM A1011				
		THICKNESS	0.12						
		UNITS	in		SIZE B	DRAWING NO. 1744-77000		REV 2	
DO NOT SCALE DRAWING				SCALE: 1:12		WEIGHT: 12.01		SHEET 2 OF 3	

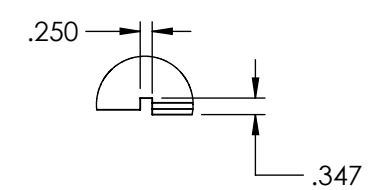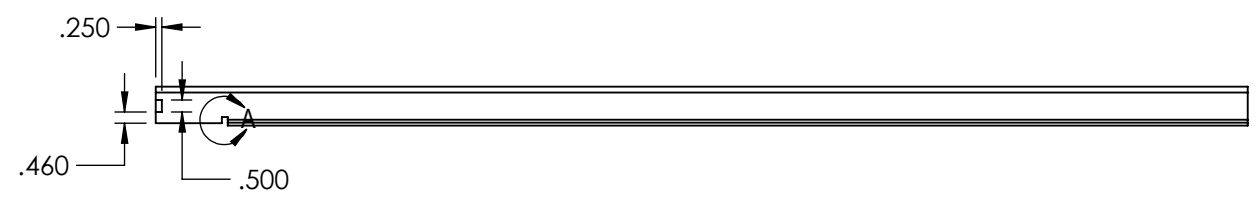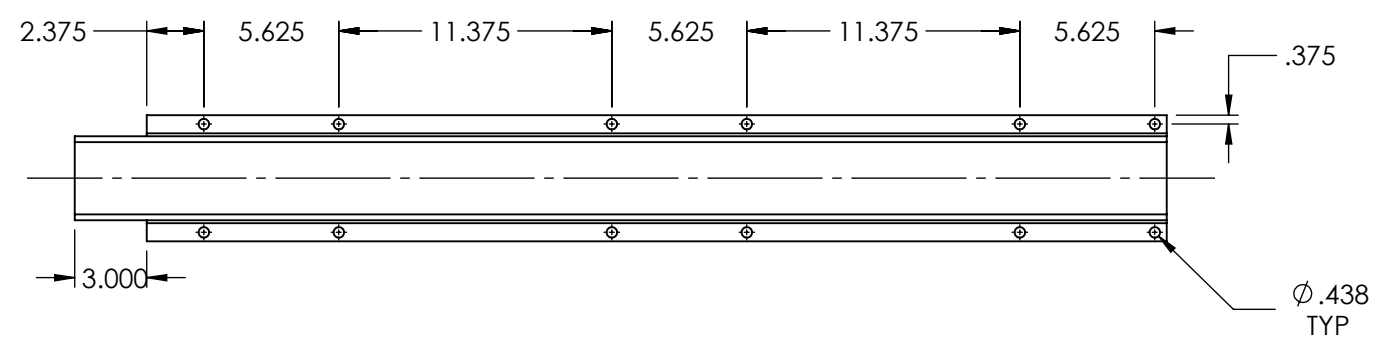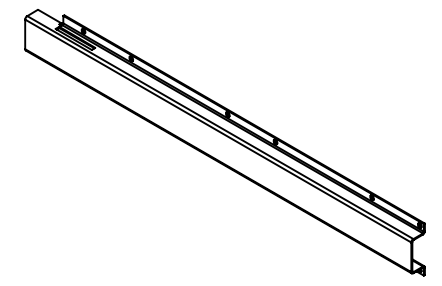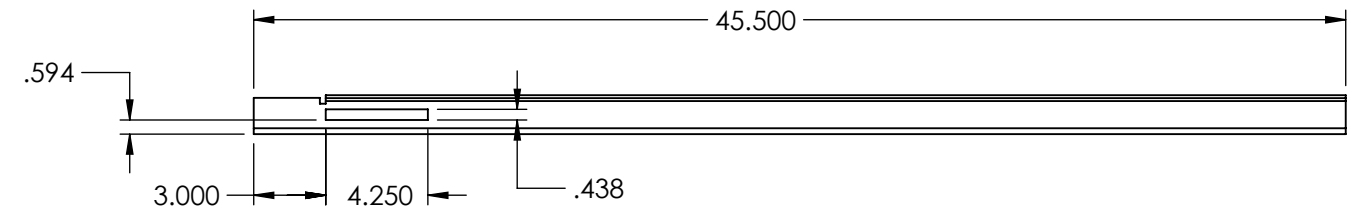


DETAIL A
SCALE 1 : 4

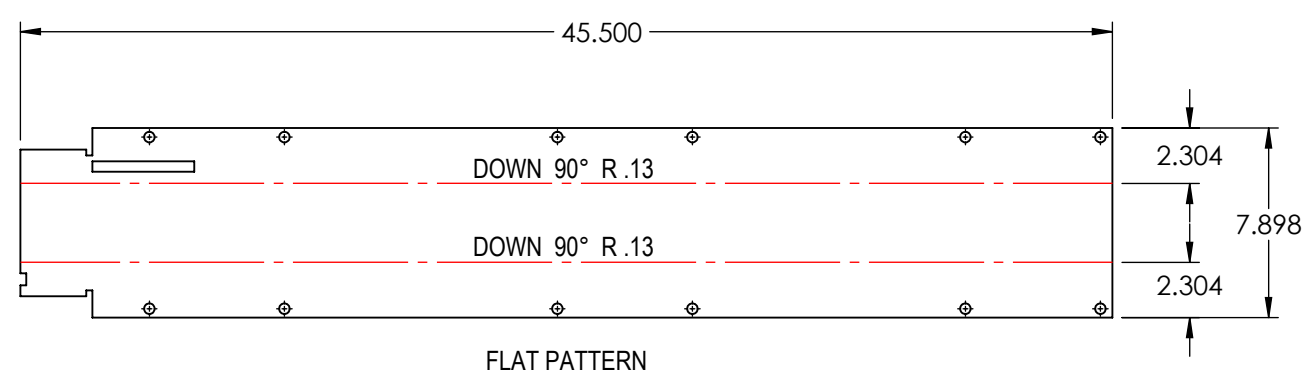

PART NO.		1744-77002				NAME		DATE			
				MODEL BY:		RK		11/30/2021			
				DRAWN BY:		RK		11/30/2021			
				MATERIAL		ASTM A36 Steel					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/8" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"				PROCESS		B,P- Burn,Bend				TITLE: SHEET, STEEL, 11 GA, ASTM A1011	
				THICKNESS		12					
				UNITS		in					
				DO NOT SCALE DRAWING							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.						SIZE		DRAWING NO.		REV	
						B		1744-77000		2	
						SCALE: 1:8		WEIGHT: 11.94		SHEET 3 OF 3	

Item No.	QTY.	Part No.	Stock Desc.	Units
1	4	AT06-2S	DEUTSCH CONNECTOR, MALE, 2 PIN	ea
2	3	DT04-2P	DEUTSCH CONNECTOR, FEMALE, 2 PIN	ea
3	185	99605565	14 GAUGE WHITE WIRE	in
4	135	5121816	14 GAUGE BLUE WIRE	in
5	135	0702131	14 GAUGE BLACK WIRE	in
6	126	9284K613	Expando-3/8 Expandable Sleeving	in
SP18,SP19, SP21,SP22	4	34318	TE CONNECT PARALLEL SPLICES 8AWG	ea
SP20	1	34319	TE CONNECT PARALLEL SPLICES 6AWG	ea
7	10	749243	FASTENAL 8AWG-6AWG SHRINK TUBE W/ ADHESIVE	in

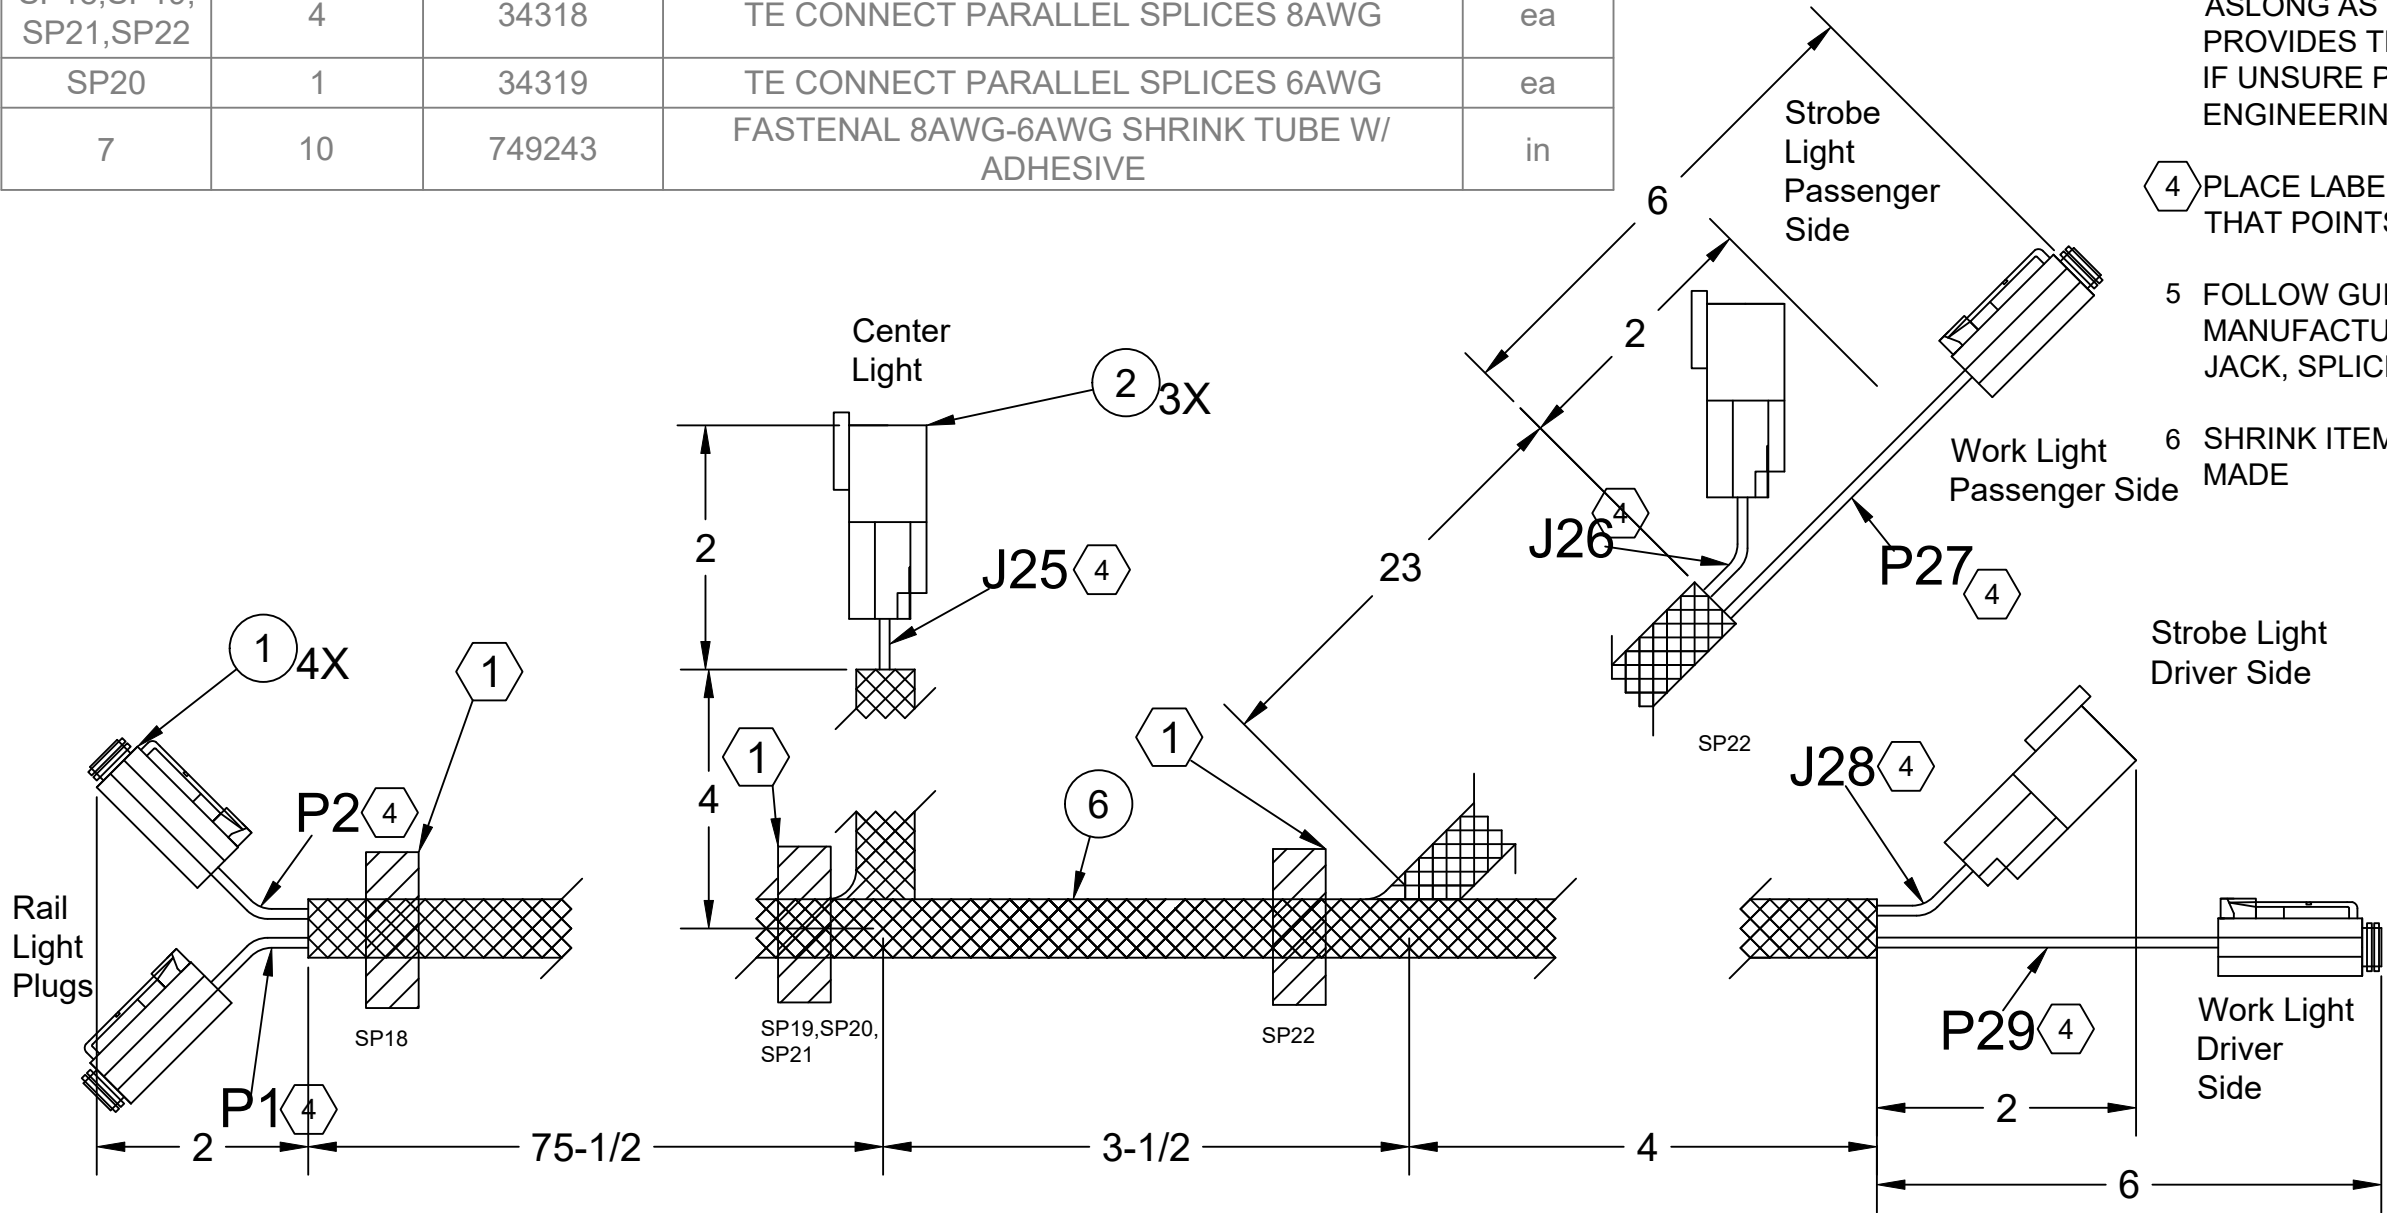

NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE
WITH IPC-620

1 SPLICING WIRES SHALL BE DONE
AN 1-1/2 BEFORE BREAKING OUT THE HARNESS


2. ITEM NO. 3,4,5 NOT SHOWN IN ASSEMBLY


3. ALTERNATE PART NO. ARE ALLOWED
ASLONG AS THE ALTERNATE PART
PROVIDES THE SAME FORM FIT AND FUNCTION.
IF UNSURE PLEASE CONTACT CURRY SUPPLY
ENGINEERING

4 PLACE LABELS WITH THE FOLLOWING CALLOUTS
THAT POINTS TO EACH COMPONENT

5 FOLLOW GUIDELINES/RECOMMENDATION OF
MANUFACTURE WHEN INSTALLING EACH PLUG,
JACK, SPLICE, CONNECTOR, AND TERMINAL

6 SHRINK ITEM NO. 7 OVER TOP EACH SPLICE THAT IS
MADE

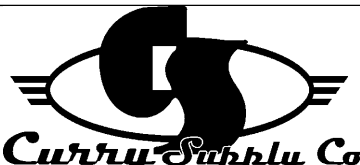PART NO.		NAME		DATE					
		MODEL BY: L.STEWARD		2/17/2022					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		DRAWN BY: J.SCHULTZ		2/17/2022					
		MATERIAL							
		PROCESS							
		THICKNESS							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS		SIZE		DRAWING NO. 2187-1002		REV 0	
		SCALE NTS							
						WEIGHT:		SHEET 1 OF 3	

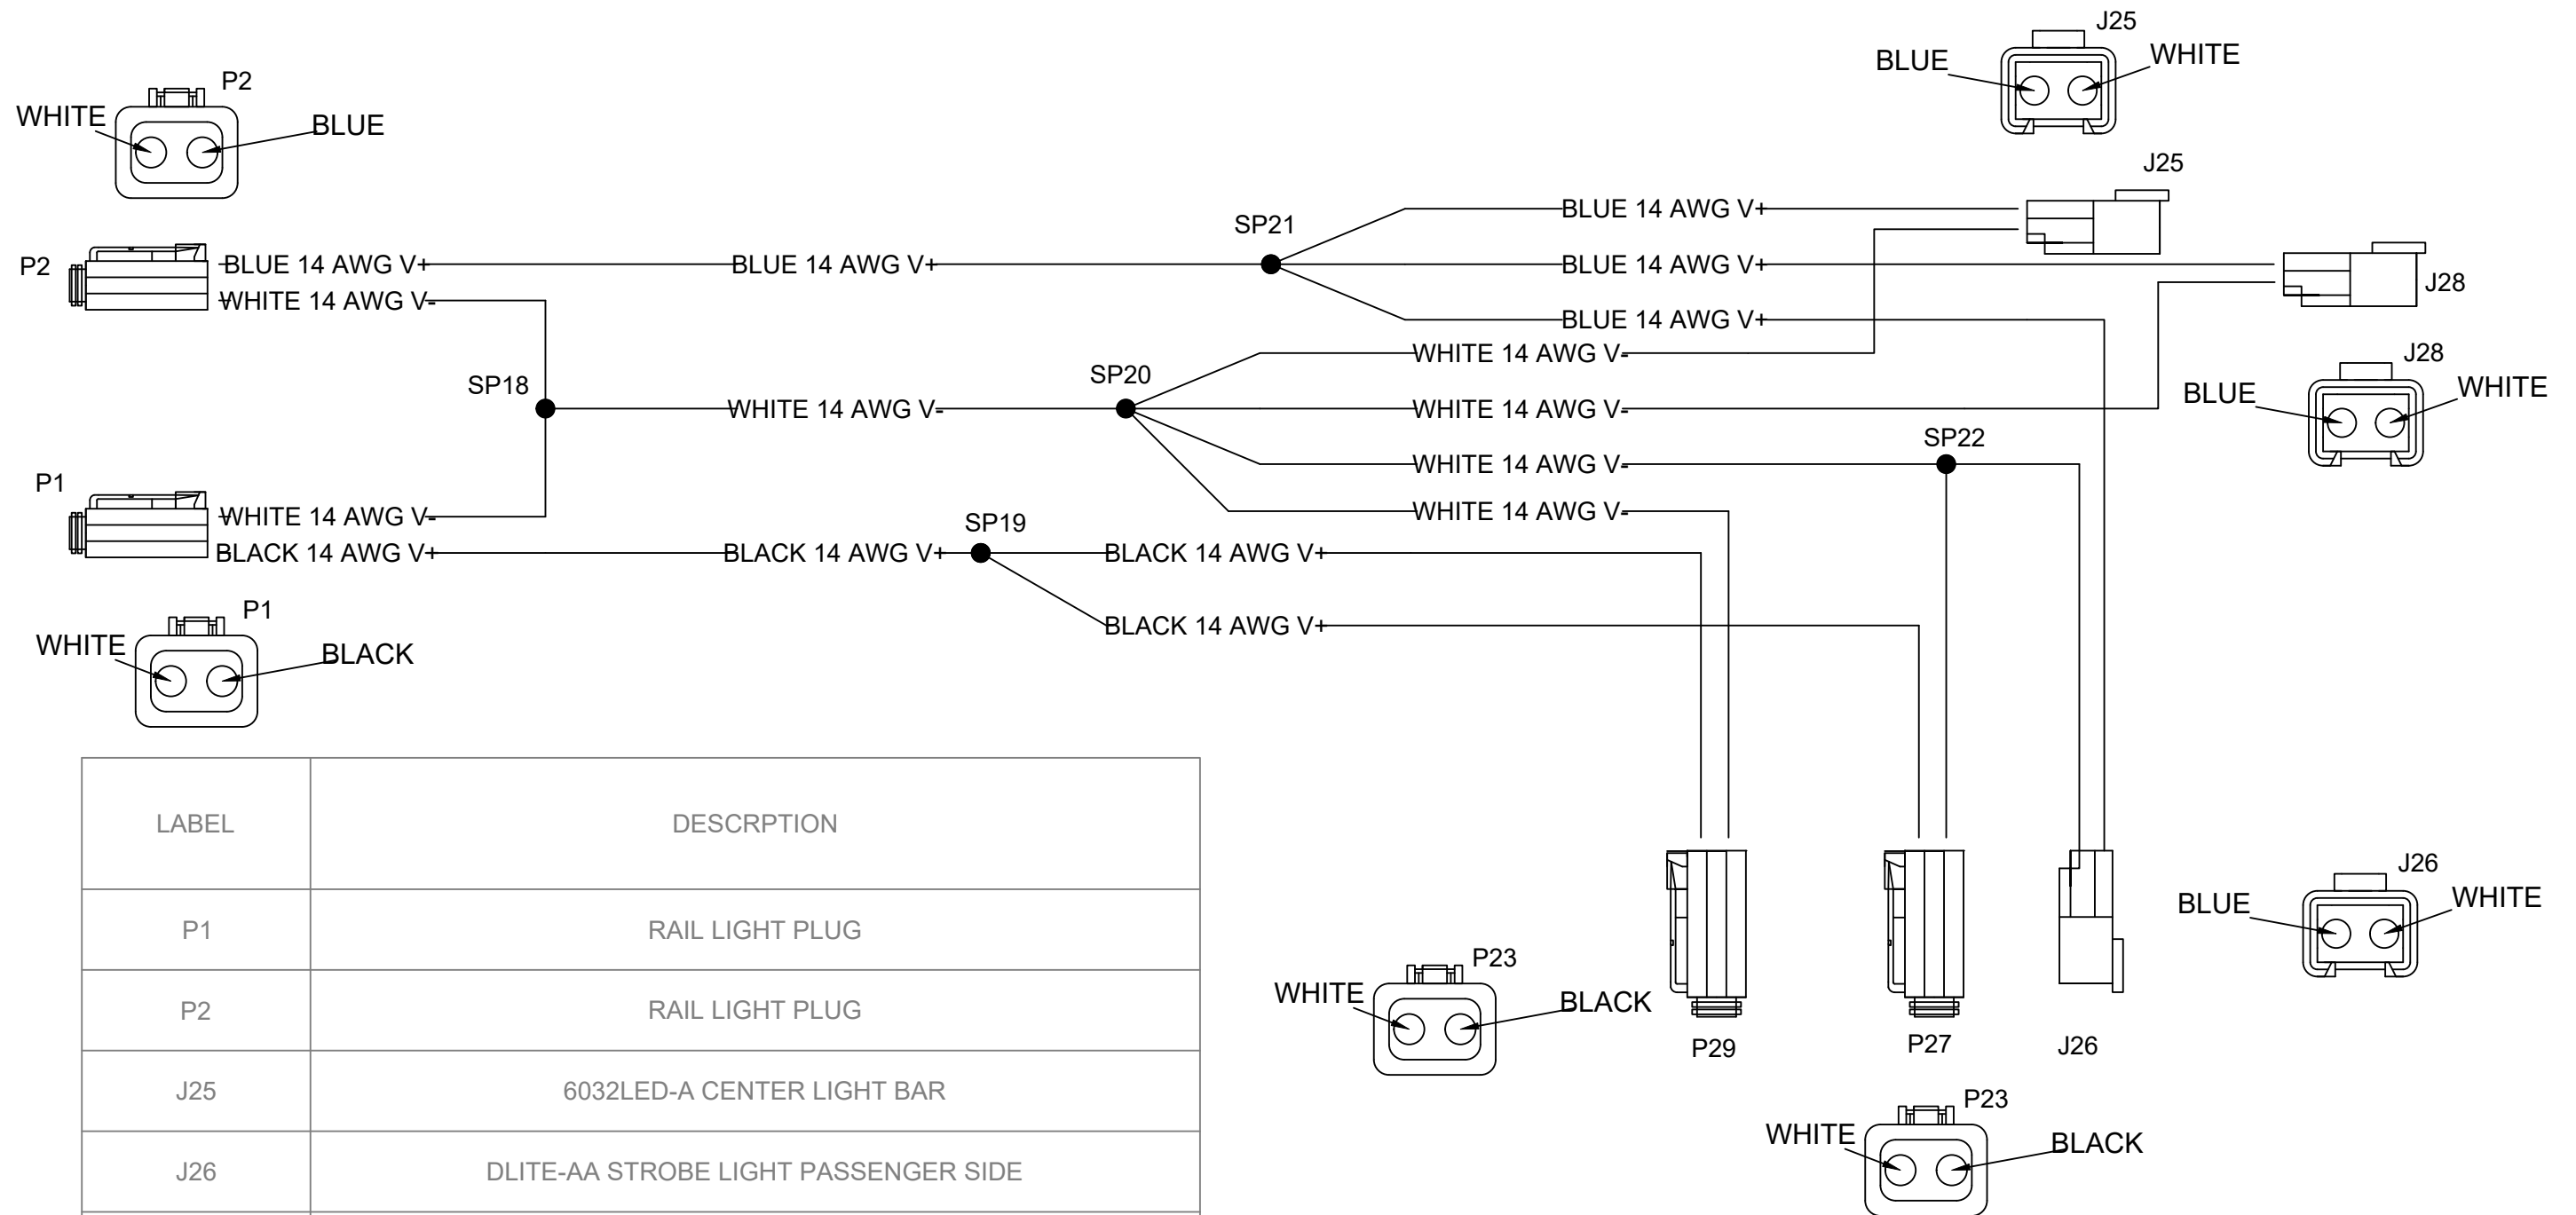


LABEL	DESCRIPTION
P1	RAIL LIGHT PLUG
P2	RAIL LIGHT PLUG
J25	6032LED-A CENTER LIGHT BAR
J26	DLITE-AA STROBE LIGHT PASSENGER SIDE
P27	LED-135CS PASSENGER SIDE WORK LIGHT
J28	DLITE-AA STROBE LIGHT DRIVER SIDE
P29	LED-135CS DRIVER SIDE WORK LIGHT

PART NO.		NAME		DATE	
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MODEL BY:	L. STEWARD	2/17/2022	
		DRAWN BY:	J. SCHULTZ	2/17/2022	
		MATERIAL			
		PROCESS			
		THICKNESS			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS		SIZE	
		SCALE		DRAWING NO.	
		NTS		2187-1002	
				REV	
				0	
				WEIGHT:	
				SHEET 2 OF 3	




TITLE: RAIL LIGHT HARNESS/WD

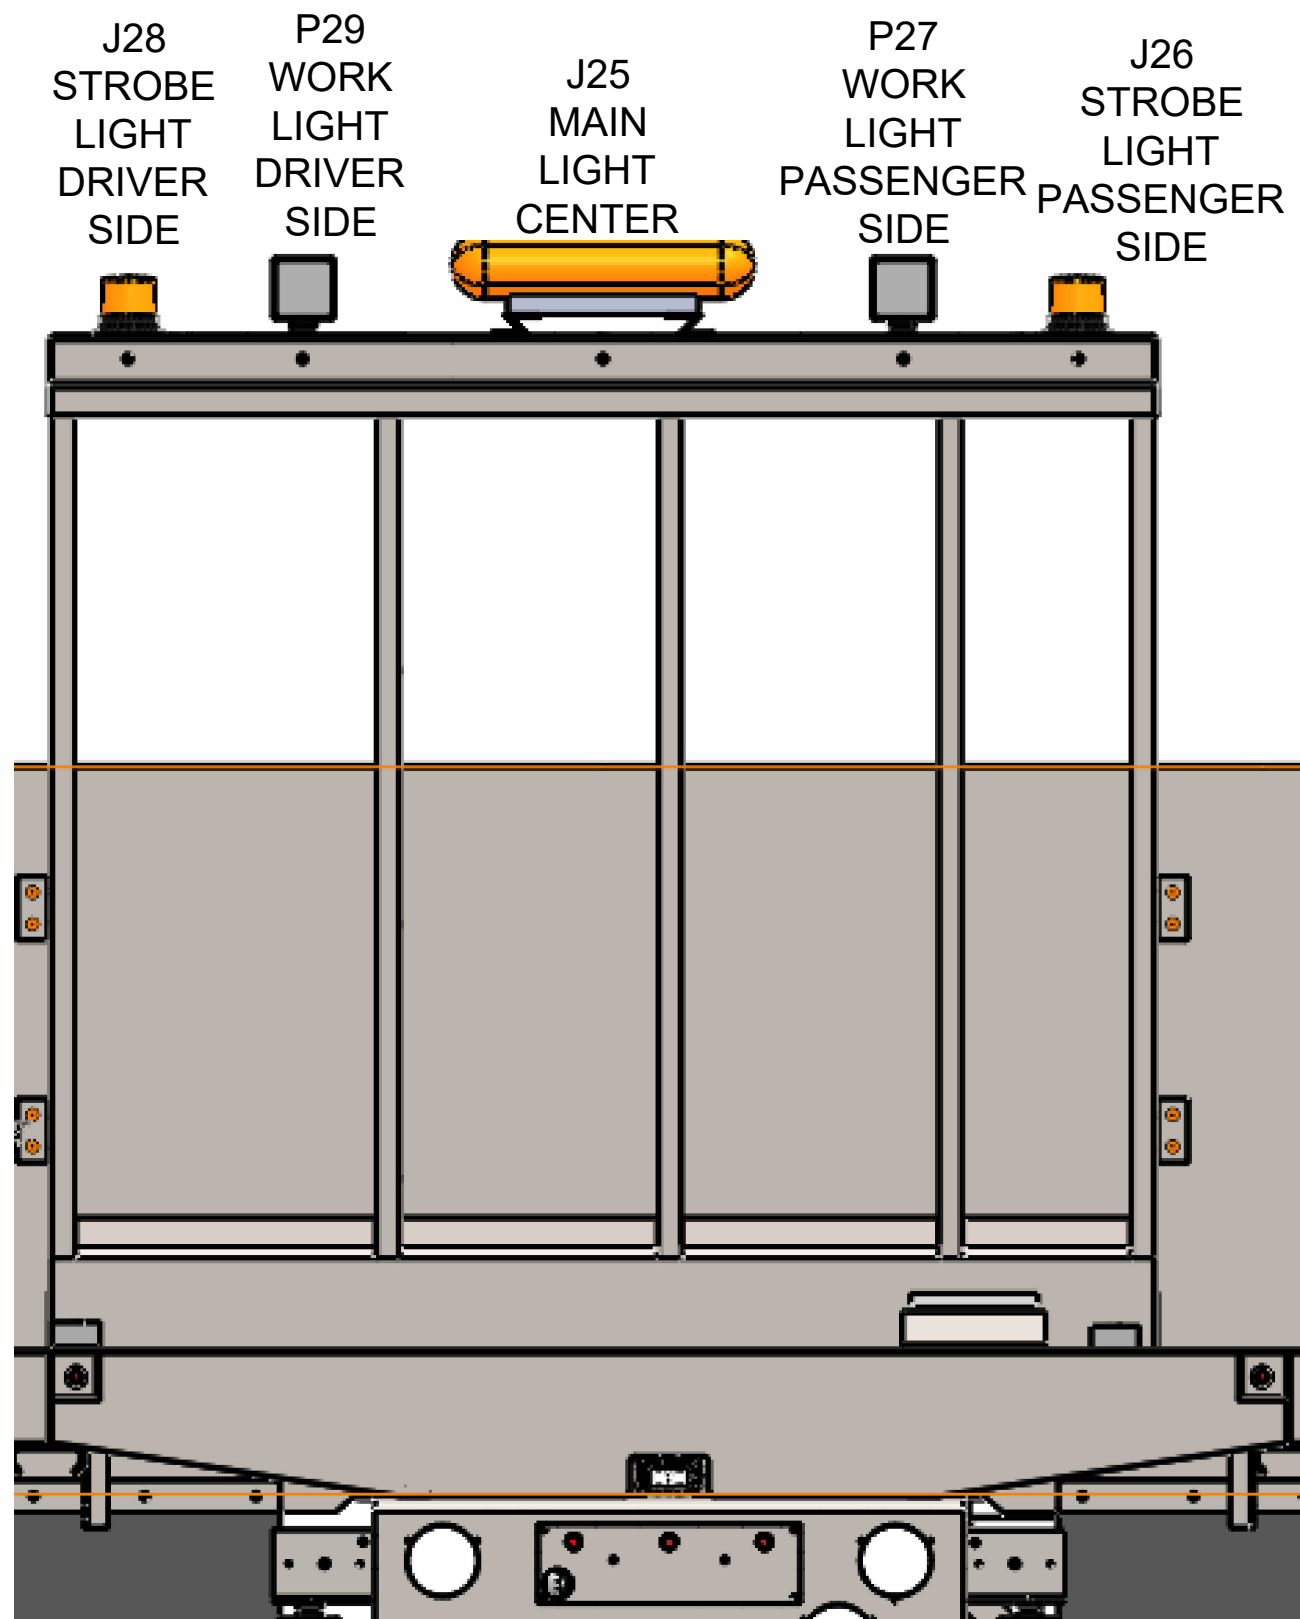


PART NO.		NAME		DATE					
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ±.01" THREE PLACE DECIMAL ±.005"		MODEL BY: L.STEWARD		2/17/2022					
		DRAWN BY: J.SCHULTZ		2/17/2022					
		MATERIAL							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		PROCESS				TITLE: RAIL LIGHT HARNESS/WD			
		THICKNESS							
		UNITS		SIZE		DRAWING NO.		REV	
SCALE		NTS		2187-1002		0			
				WEIGHT:		SHEET 3 OF 3			

Item No.	QTY.	Part No.	Stock Desc.	Units
1	150	9284K613	Expando-3/8 Expandable Sleeving	ea
2	1	DT04-4P	DEUTSCH CONNECTOR, FEMALE, 4 PIN	ea
3	152	0762646	14 GAUGE RED WIRE	in
4	152	5121816	14 GAUGE BLUE WIRE	in
5	152	0702131	14 GAUGE BLACK WIRE	in

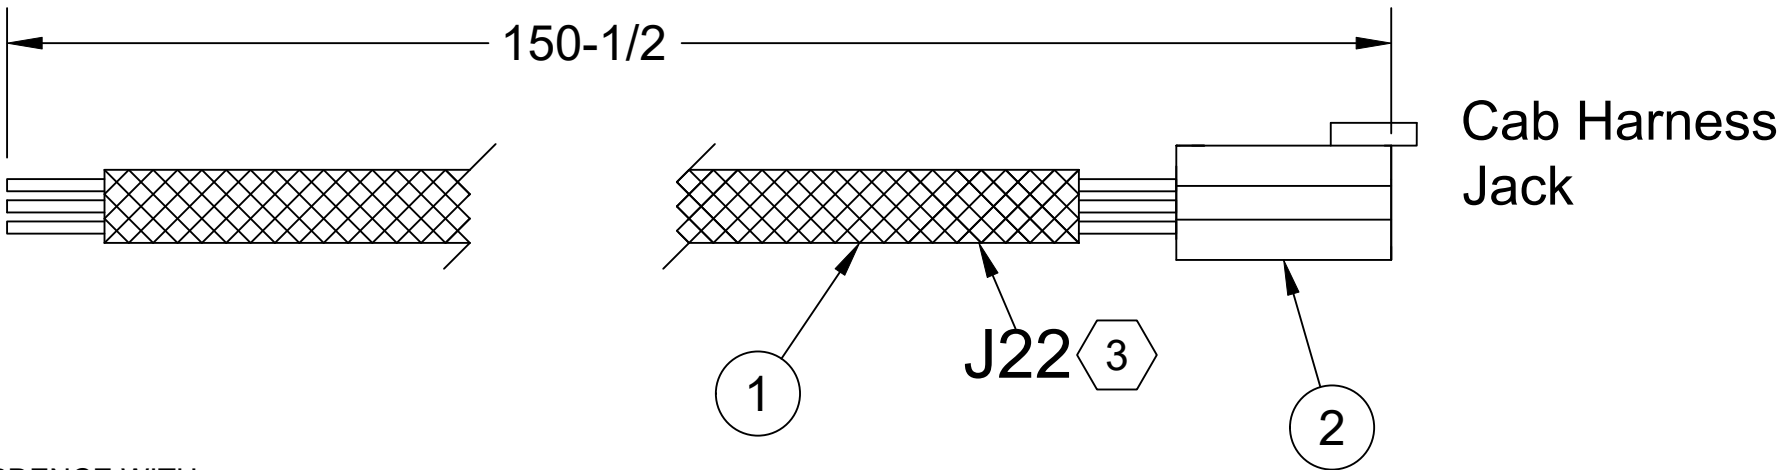

NOTES:
REFERENCE DOCUMENT:
-CABLE ROUTE PROCEDURE
-BUILD CABLE HARNESS IN ACCORDENCE WITH
IPC-620

- 1. ITEM NO. 3,4,5 NOT SHOWN IN ASSEMBLY
- 2. ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCTION. IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
- 3 PLACE LABELS WITH THE FOLLOWING CALLOUTS THAT POINTS TO EACH COMPONENT
- 4 FOLLOW GUIDLINES/RECOMMENDATION OF MANUFACTURE WHEN INSTALLING EACH PLUG, JACK, SPLICE, CONNECTOR, AND TERMINAL


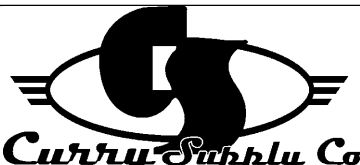
PART NO.		MODEL BY:	NAME	DATE			
		DRAWN BY:	J.SCHULTZ	2/17/2022			
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ±.01" THREE PLACE DECIMAL ±.005"		MATERIAL			TITLE: CAB HARNESS		
		PROCESS					
		THICKNESS					
		UNITS					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		SCALE			SIZE	DRAWING NO. 2187-1003	REV 0
		NTS			WEIGHT:		SHEET 1 OF 2

BLACK 14 AWG V+


BLUE 14 AWG V+

RED 14 AWG V+

LABEL	DESCRIPTION
J22	CAB HARNESS JACK

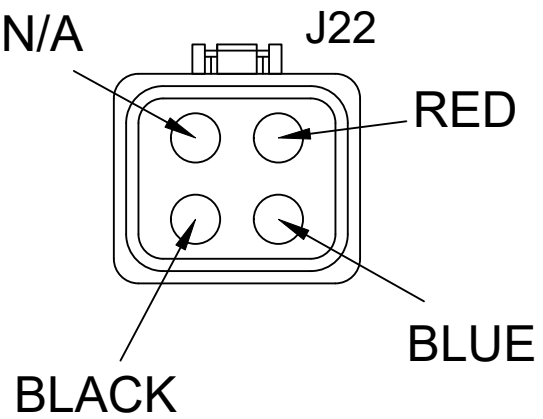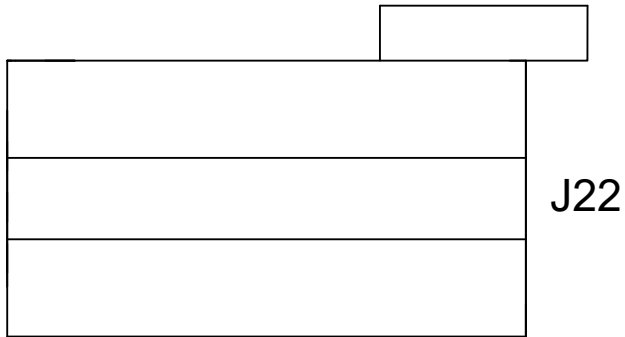

PART NO.		NAME	DATE	
		MODEL BY: L.STEWARD	2/17/2022	
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ±.01" THREE PLACE DECIMAL ±.005"		DRAWN BY: J.SCHULTZ	2/17/2022	
		MATERIAL		
		PROCESS		
		THICKNESS		TITLE: CAB HARNESS
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		UNITS		
		SCALE NTS		
		SIZE	DRAWING NO. 2187-1003	
		WEIGHT:		SHEET 2 OF 2

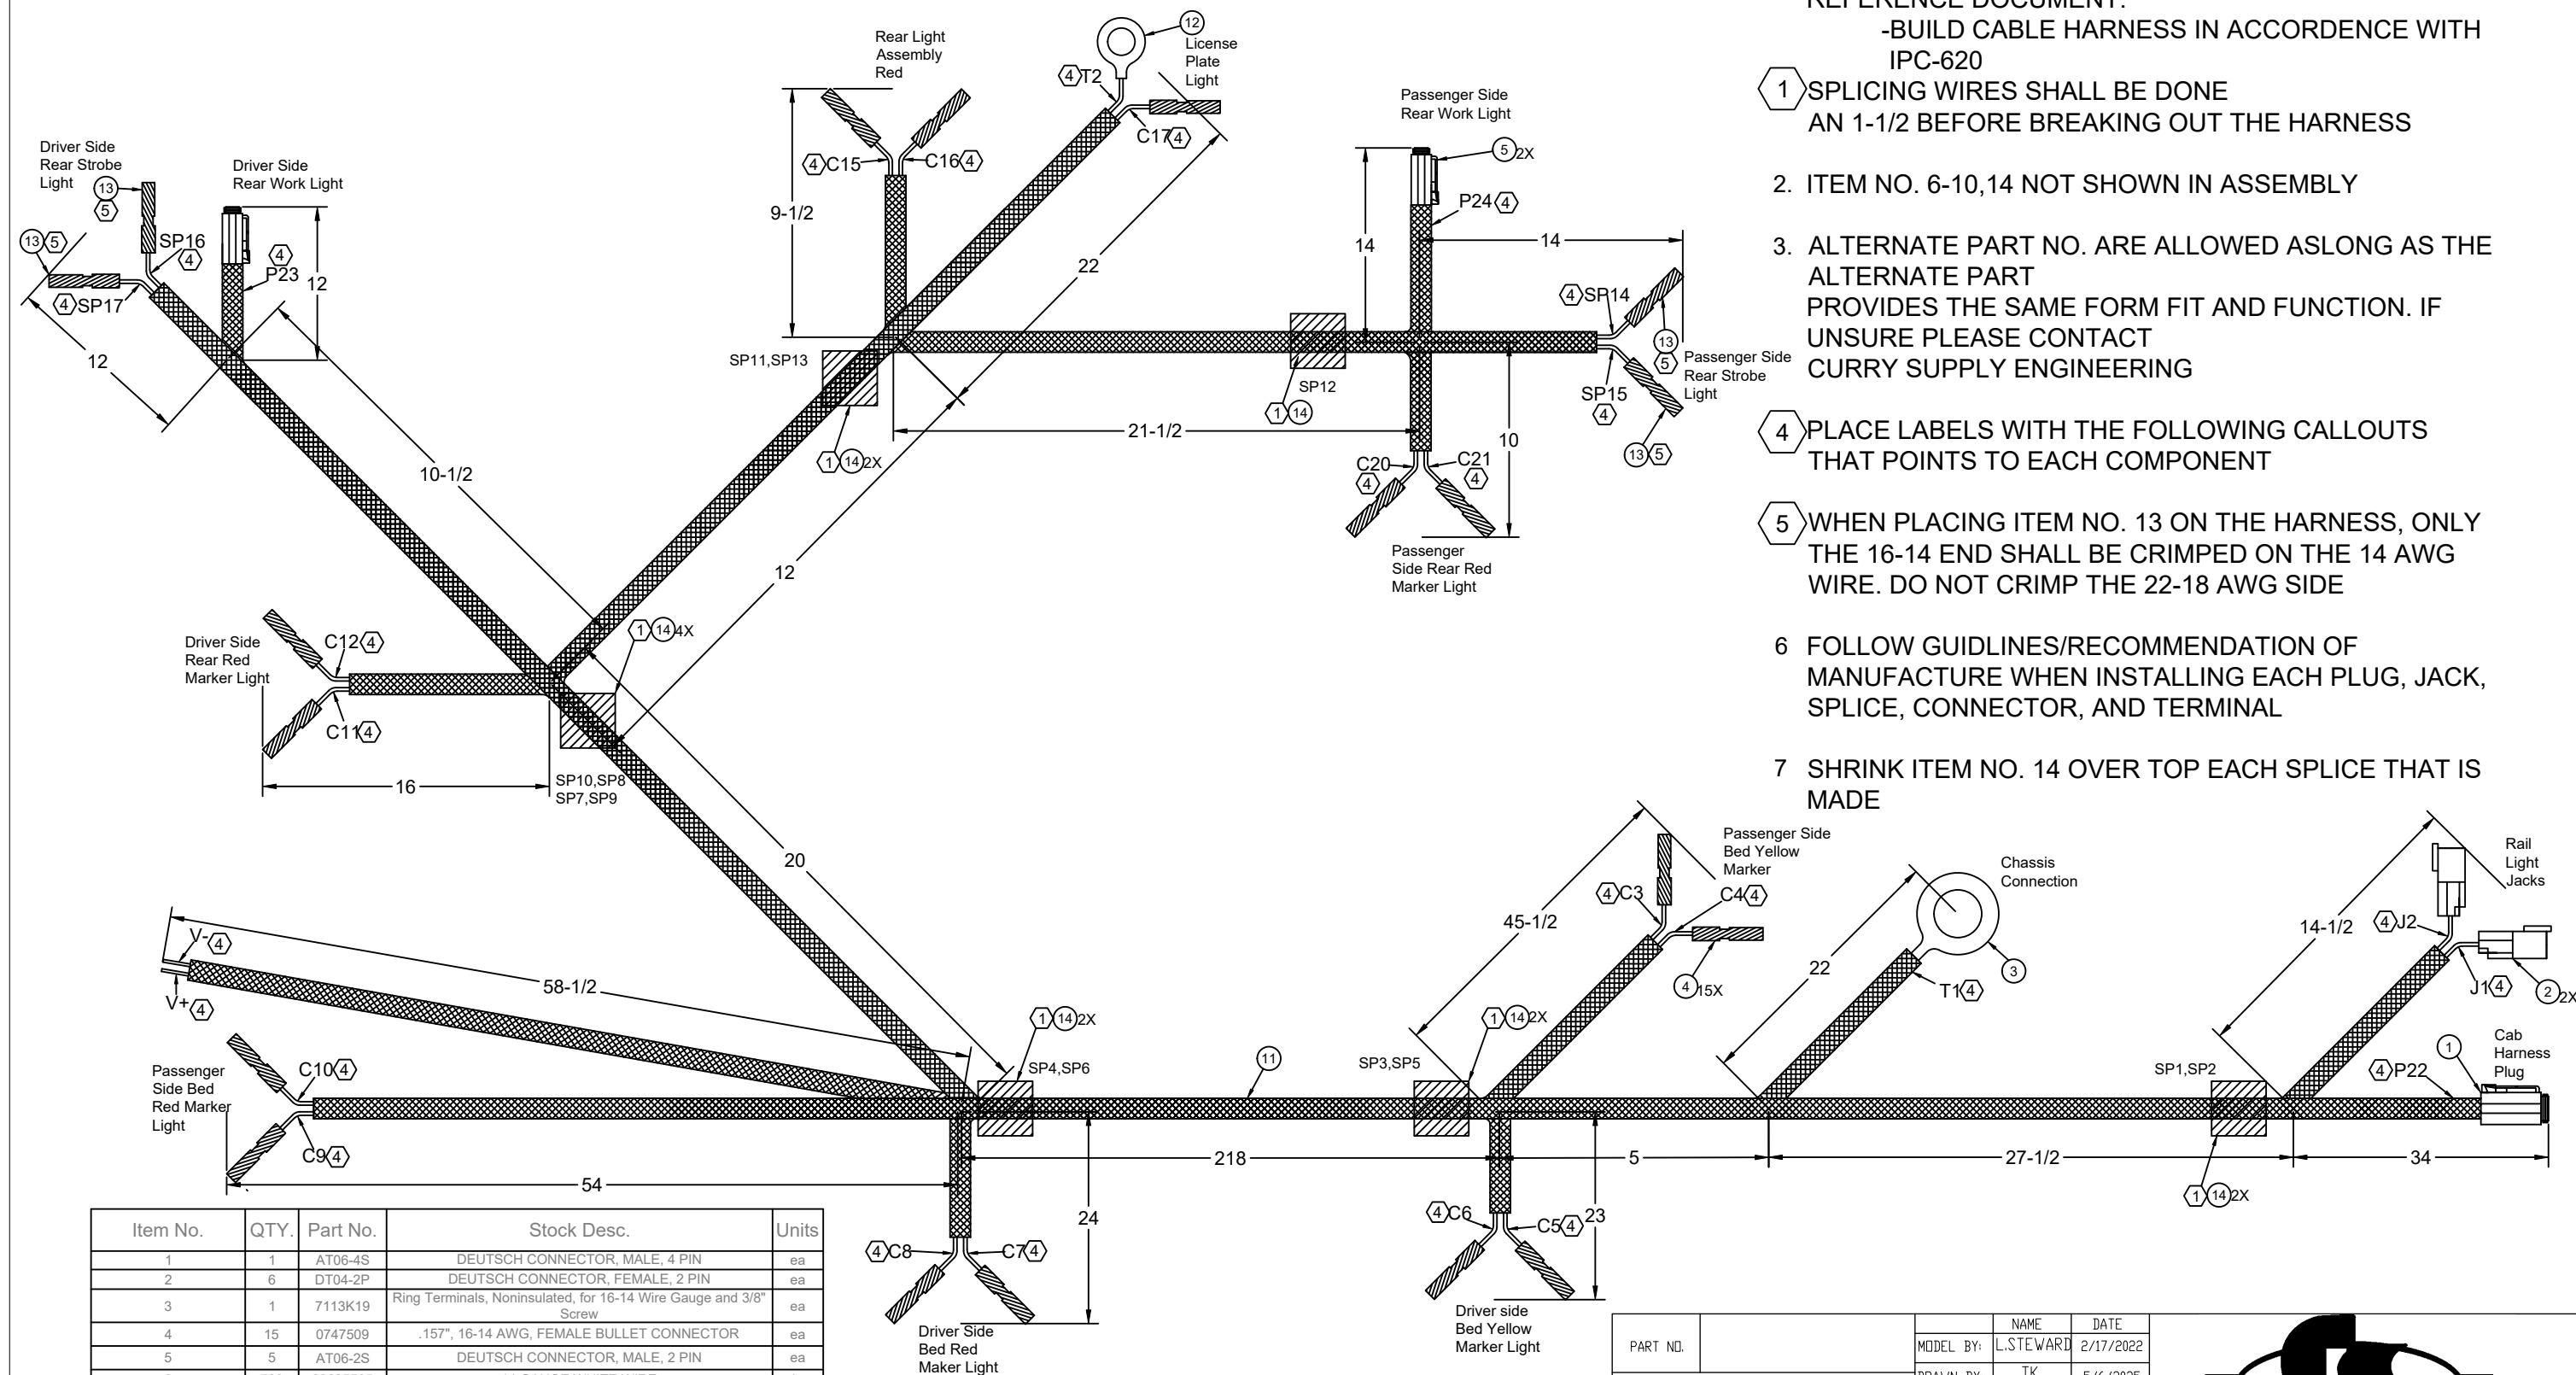

Item No.	QTY.	Part No.	Stock Desc.	Units
1	1	AT06-4S	DEUTSCH CONNECTOR, MALE, 4 PIN	ea
2	6	DT04-2P	DEUTSCH CONNECTOR, FEMALE, 2 PIN	ea
3	1	7113K19	Ring Terminals, Noninsulated, for 16-14 Wire Gauge and 3/8" Screw	ea
4	15	0747509	.157", 16-14 AWG, FEMALE BULLET CONNECTOR	ea
5	5	AT06-2S	DEUTSCH CONNECTOR, MALE, 2 PIN	ea
6	780	99605565	14 GAUGE WHITE WIRE	in
7	424	5121816	14 GAUGE BLUE WIRE	in
8	60	0702131	14 GAUGE BLACK WIRE	in
9	550	5121819	14 GAUGE BROWN WIRE	in
10	399	0762648	14 GAUGE RED WIRE	in
11	680	9284K613	Expando-3/8 Expandable Sleeveing	in
12	1	7113K13	Ring Terminals, Noninsulated, for 16-14 Wire Gauge and 1/4" Screw	ea
SP14,SP15,SP16,SP17	4	716043	22-18 to 16-14 AWG SPLICE REDUCER	ea
SP1,SP2,SP5,SP7,SP8,SP9,SP11,SP12,SP13	9	34318	TE CONNECT PARALLEL SPLICES 8AWG	ea
SP3,SP4,SP6,SP10	4	34319	TE CONNECT PARALLEL SPLICES 6AWG	ea
14	27	749243	FASTENAL 8AWG-6AWG SHRINK TUBE W/ ADHESIVE	in

- NOTES:
REFERENCE DOCUMENT:
-BUILD CABLE HARNESS IN ACCORDENCE WITH IPC-620
- 1 SPLICING WIRES SHALL BE DONE AN 1-1/2 BEFORE BREAKING OUT THE HARNESS
 2. ITEM NO. 6-10,14 NOT SHOWN IN ASSEMBLY
 3. ALTERNATE PART NO. ARE ALLOWED ASLONG AS THE ALTERNATE PART PROVIDES THE SAME FORM FIT AND FUNCTION. IF UNSURE PLEASE CONTACT CURRY SUPPLY ENGINEERING
 - 4 PLACE LABELS WITH THE FOLLOWING CALLOUTS THAT POINTS TO EACH COMPONENT
 - 5 WHEN PLACING ITEM NO. 13 ON THE HARNESS, ONLY THE 16-14 END SHALL BE CRIMPED ON THE 14 AWG WIRE. DO NOT CRIMP THE 22-18 AWG SIDE
 - 6 FOLLOW GUIDLINES/RECOMMENDATION OF MANUFACTURE WHEN INSTALLING EACH PLUG, JACK, SPLICE, CONNECTOR, AND TERMINAL
 - 7 SHRINK ITEM NO. 14 OVER TOP EACH SPLICE THAT IS MADE


PART NO.			NAME	DATE		
		MODEL BY:	L.STEWARD	2/17/2022		
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"	DRAWN BY:	TK	5/6/2025			
	MATERIAL					
	PROCESS					
	THICKNESS					
	UNITS					
SCALE			NTS			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.			TITLE: BED HARNESS/WD PODS GEN3			
			SIZE	DRAWING NO. 2187-1080		REV 0
			WEIGHT:		SHEET 1 OF 4	



TITLE: BED HARNESS/WD
PODS GEN3

SIZE DRAWING NO.
2187-1080


REV
0

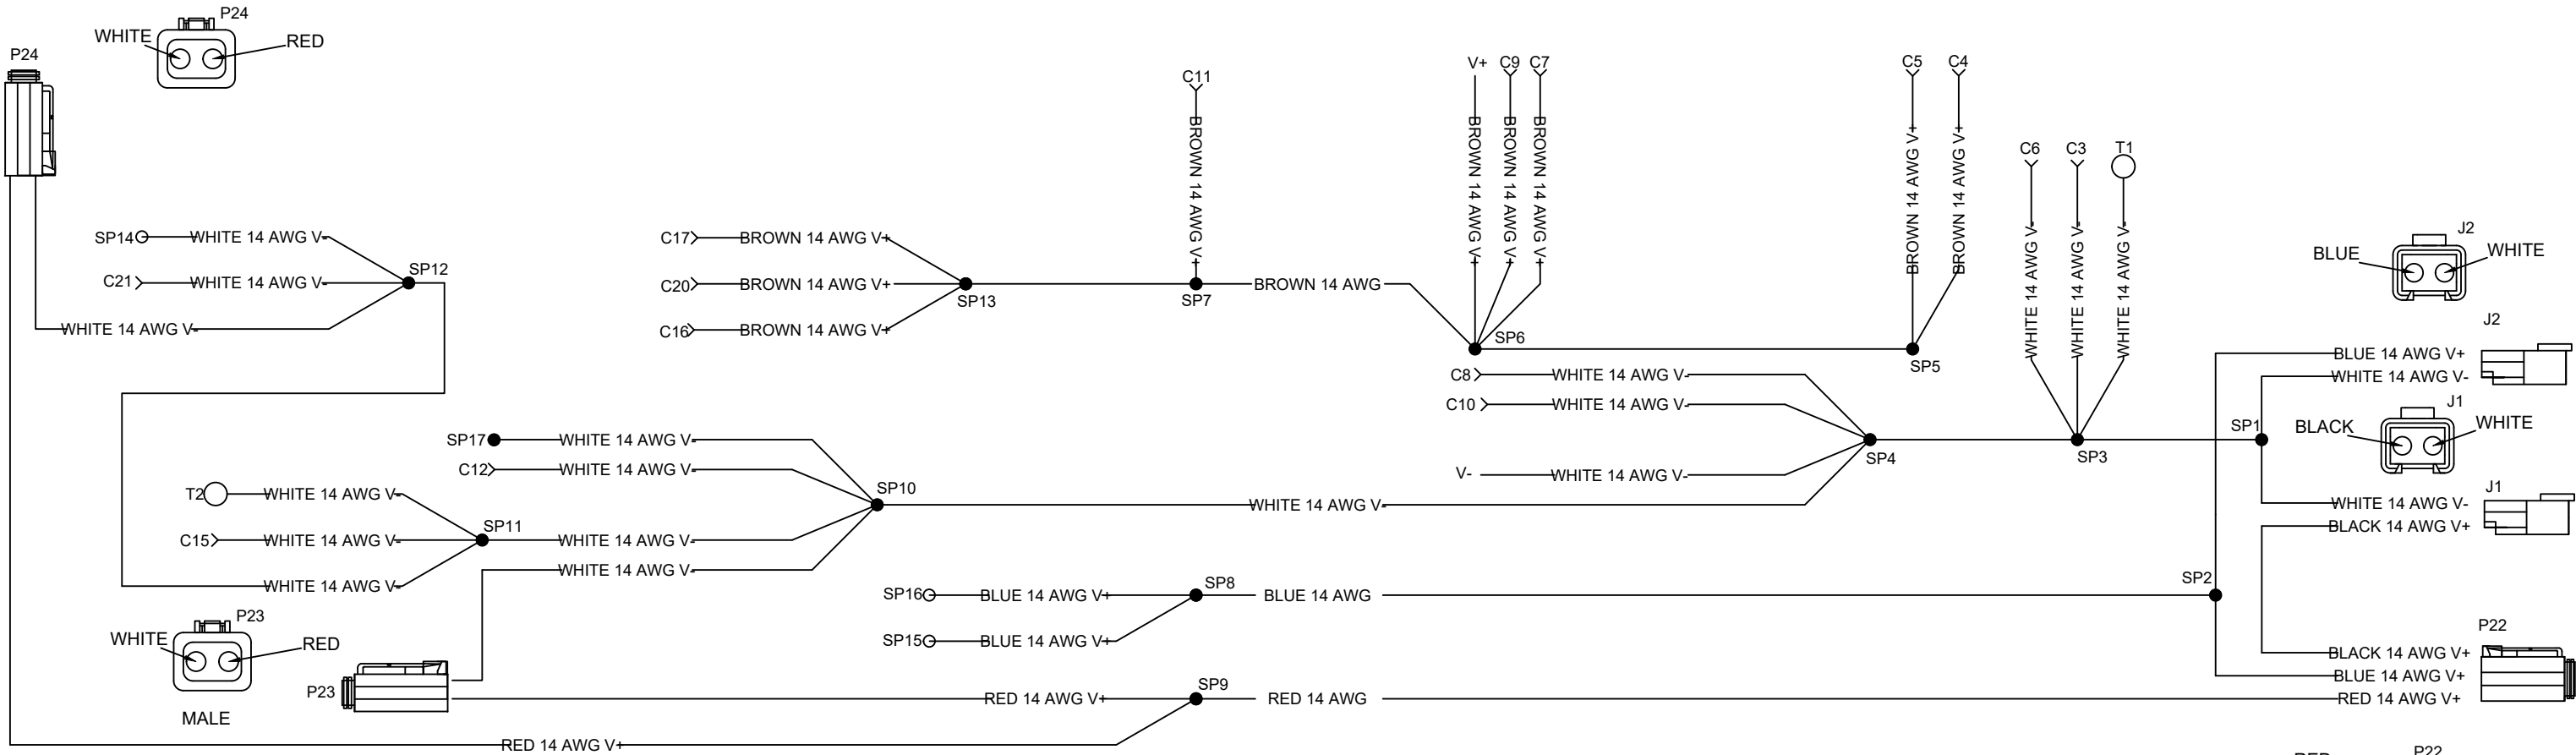



LABEL	DESCRIPTION	LABEL	DESCRIPTION
J1	RAIL LIGHT JACK, HOOKS UP TO RAIL LIGHT HARNESS	C11	DRIVER SIDE REAR RED MARKER LIGHT V+
J2	RAIL LIGHT JACK, HOOKS UP TO RAIL LIGHT HARNESS	C12	DRIVER SIDE REAR RED MARKER LIGHT V-
P22	CAB HARNESS PLUG	SP17	DRIVER SIDE REAR STROBE LIGHT V-
T1	CHASSIS CONNECTION	SP16	DRIVER SIDE REAR STROBE LIGHT V+
C3	PASSENGER SIDE BED YELLOW MARKER V-	P23	DRIVER SIDE REAR WORK LIGHT
C4	PASSENGER SIDE BED YELLOW MARKER LIGHT V+	C15	REAR LIGHT ASSEMBLY RED V-
C5	DRIVER SIDE BED YELLOW MARKER LIGHT V+	C16	REAR LIGHT ASSEMBLY RED V+
C6	DRIVER SIDE BED YELLOW MARKER LIGHT V-	T2	CHASSIS CONNECTION NEAR LICENSE PLATE LIGHT
C7	DRIVER SIDE BED RED MARKER LIGHT V+	C17	LICENSE PLATE LIGHT V+
C8	DRIVER SIDE BED RED MARKER LIGHT V-	P24	PASSENGER SIDE REAR STROBE LIGHT
C9	PASSENGER SIDE BED RED MARKER LIGHT V+	SP14	PASSENGER SIDE REAR STROBE LIGHT V-
C10	PASSENGER SIDE BED RED MARKER LIGHT V-	SP15	PASSENGER SIDE REAR STROBE LIGHT V+
V+	POSITIVE VOLTAGE THAT TIES INTO THE MAIN HARNESS TO POWER THE MARKER LIGHTS	C20	PASSENGER SIDE REAR RED MARKER LIGHT V+
V-	NEGATIVE VOLTAGE THAT TIES INTO THE MAIN HARNESS TO POWER THE MARKER LIGHTS	C21	PASSENGER SIDE REAR RED MARKER LIGHT V-

PART NO.		NAME	DATE
		MODEL BY: L. STEWARD	2/17/2022
TOLERANCES: UNLESS OTHERWISE SPECIFIED:		DRAWN BY: TK	5/6/2025
FRACTIONAL: ± 1/2"		MATERIAL	
ANGULAR: ± 1°		PROCESS	
TWO PLACE DECIMAL ± 0.01"		THICKNESS	
THREE PLACE DECIMAL ± 0.005"		UNITS	
PROPRIETARY AND CONFIDENTIAL		SCALE NTS	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		TITLE: BED HARNESS/WD PODS GEN 3	
SIZE	DRAWING NO. 2187-1080	REV	
WEIGHT:		SHEET 2 OF 4	

Curry Supply Co.

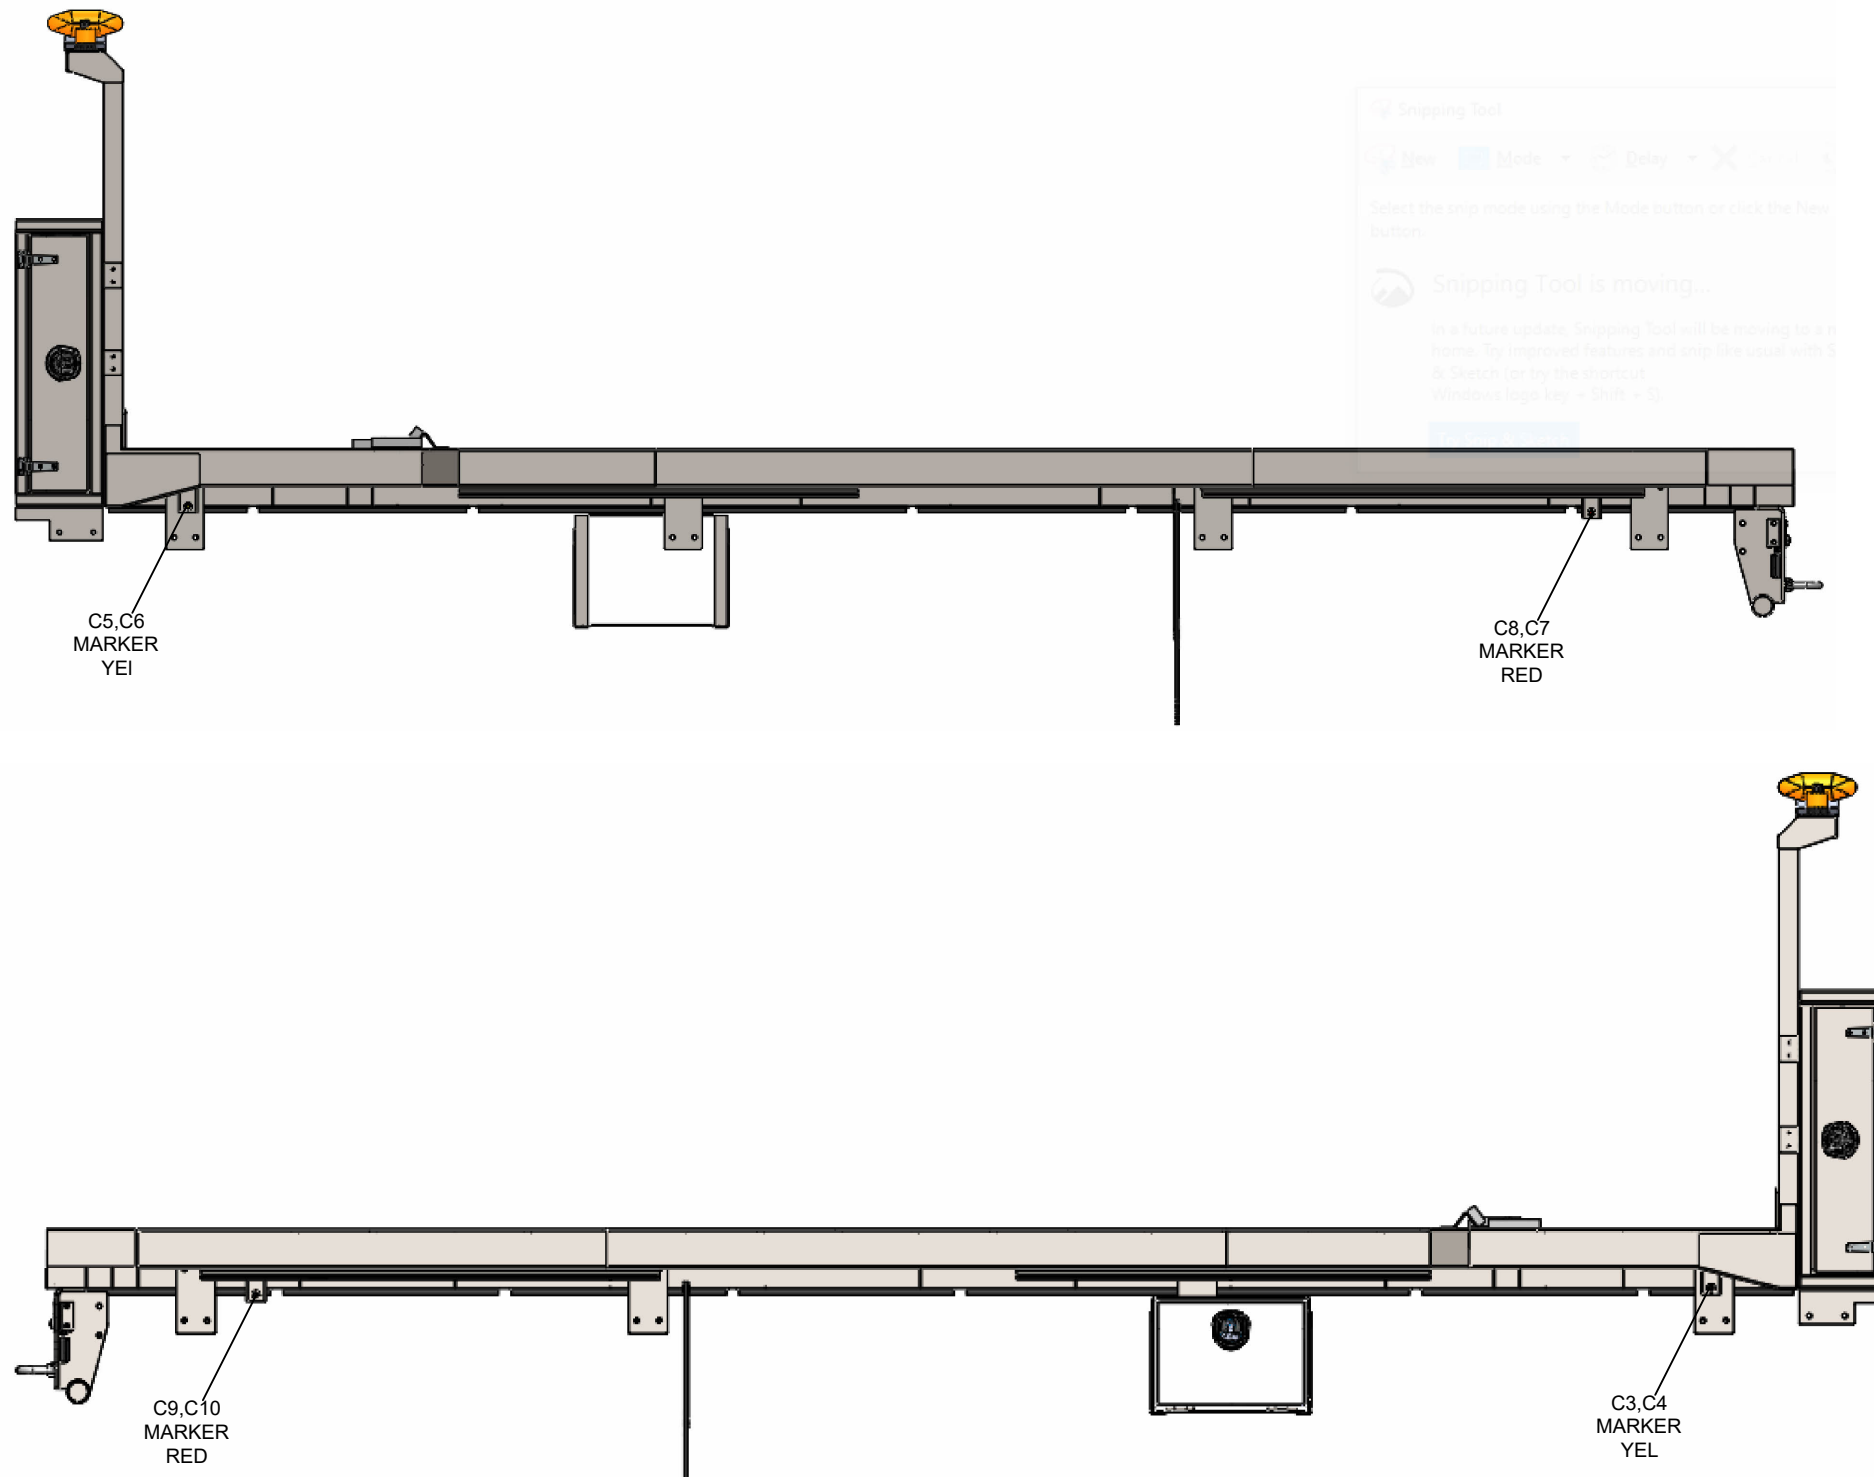

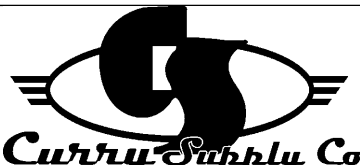PART NO.		NAME	DATE				
TOLERANCES: UNLESS OTHERWISE SPECIFIED:		MODEL BY:	L.STEWARD			2/17/2022	
		DRAWN BY:	TK			5/6/2025	
FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"		MATERIAL			TITLE: BED HARNESS/WD PODS GEN 3		
		PROCESS					
		THICKNESS					
		UNITS					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.		SCALE			SIZE	DRAWING NO. 2187-1080	REV
		NTS				WEIGHT:	SHEET 3 OF 4

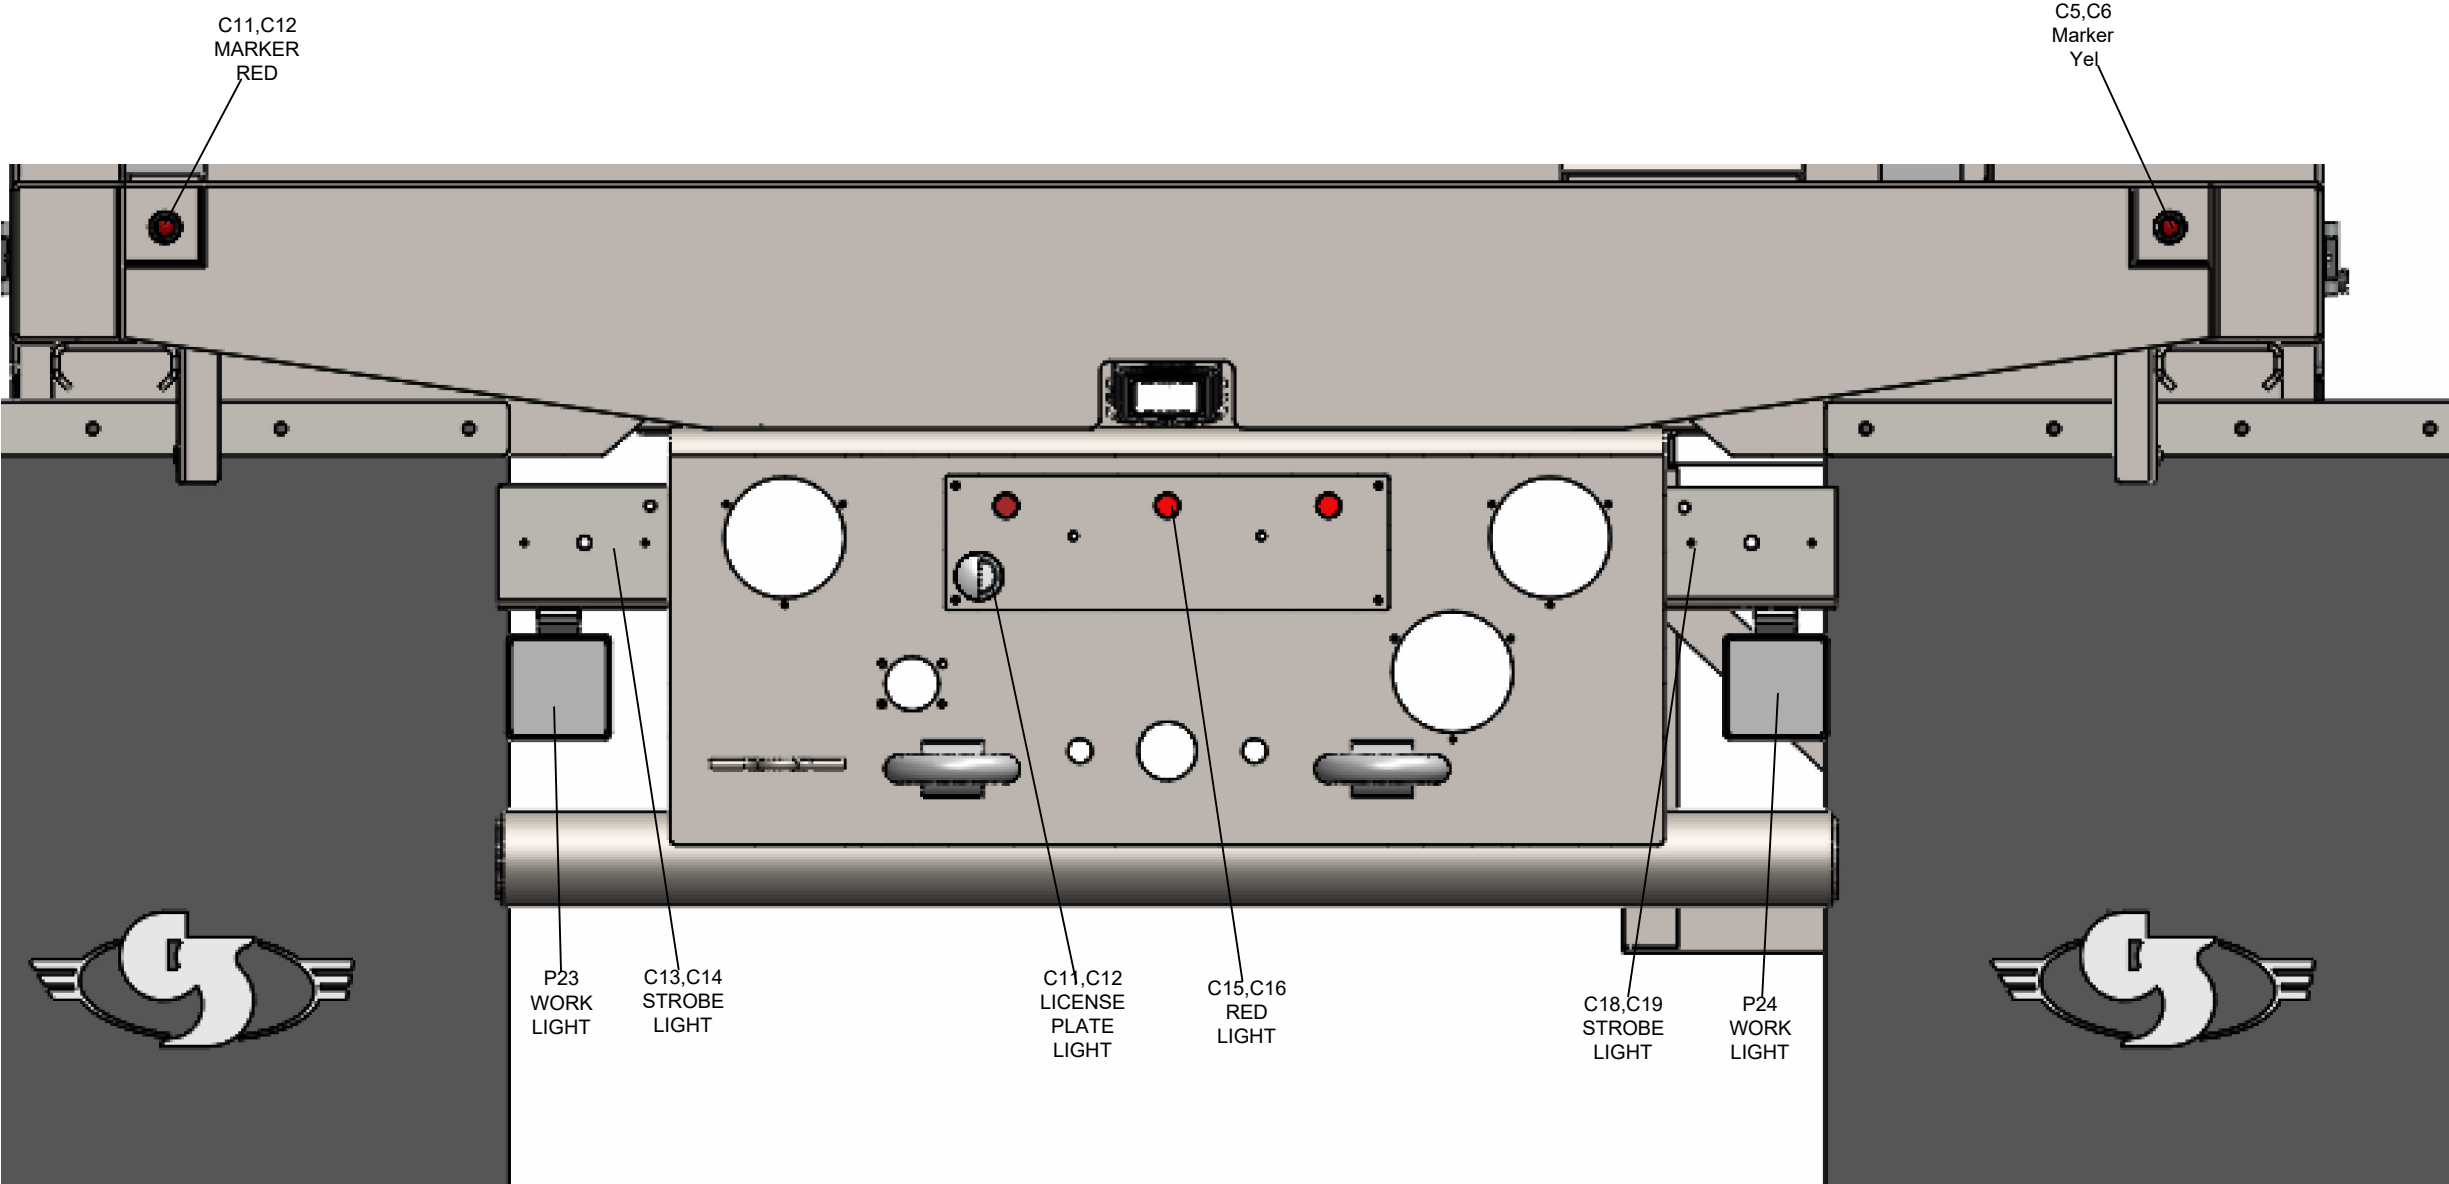


PART NO.		MODEL BY:	NAME	DATE	 TITLE: BED HARNESS/WD PODS GEN 3					
		DRAWN BY:	TK	5/6/2025						
TOLERANCES: UNLESS OTHERWISE SPECIFIED: FRACTIONAL: ± 1/2" ANGULAR: ± 1° TWO PLACE DECIMAL ± .01" THREE PLACE DECIMAL ± .005"			MATERIAL							
			PROCESS							
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CURRY SUPPLY COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.			THICKNESS		SIZE		DRAWING NO. 2187-1080		REV	
			UNITS							
			SCALE		NTS				WEIGHT:	

PODS 20' FLATBED OVERALL HARNESS SCHEMATIC (COLORED)

BROWN = MARKER
 BLUE = STROBE LIGHT
 RED = REAR WORK LIGHT
 BLACK = FRONT WORK LIGHT
 WHITE = GROUND

REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	APPROVED	SCR. W.
CD, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14	1	Adjusted lengths for headboard area and marker lights, added connector to chassis harness.	5/3/2022	LS	2045

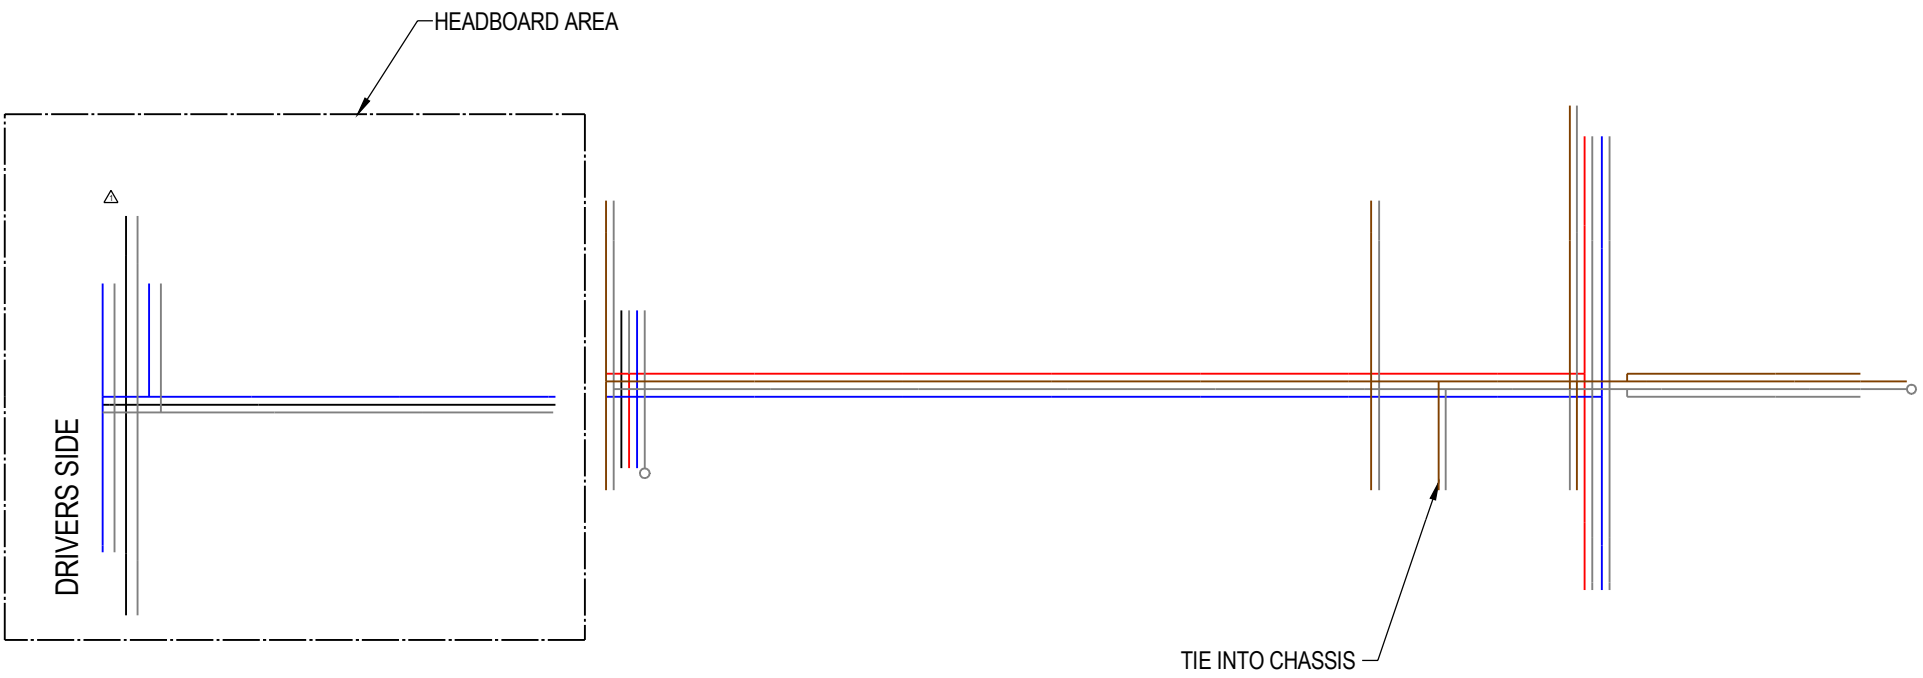

NOTES:
 - ALL WIRES USED ARE 14 GAUGE
 - NO SOLDER
 - ALL SPLICE POINTS SHOULD USE A DOUBLE SIDED BUTT CONNECTOR ON THE MULTI WIRE END

FOR REFERENCE:
 - ○ = SPLICE POINT
 - —○— = I BOLT LOCATION

PART NO. QUANTITY UNLESS OTHERWISE SPECIFIED: REACTIONAL: 1/8" ANGLE: 1/2" TWO PLACE DECIMAL: 1/8" THREE PLACE DECIMAL: .001"	DRAWING NO. 13 REVISED BY 13 DATE 3/17/2022 TITLE: 1600-3400 - PODS HARNESS SIZE: 1600-3400 - PODS HARNESS WEIGHT: SHEET 1 OF 9	CURRY SUPPLY CO. 1600-3400 - PODS HARNESS SHEET 1 OF 9
---	--	--

**PODS 20' FLATBED
DIMENSIONAL LAYOUT**

HEADBOARD AREA

18" 12" 30" 36" 80"

BLUE/WHITE BLACK/WHITE BLUE/WHITE BLACK/WHITE

BLUE/WHITE BLACK/WHITE WHITE 12" 22"

RED BLUE BLACK

BROWN/WHITE 50" 22" 220" 256"

BROWN/WHITE 50" 22" 24"

BROWN/WHITE RED/WHITE BLUE/WHITE 46" 18" 22"

BROWN/WHITE WHITE WILL RECEIVE I-BOLTS

BROWN/WHITE 22"

PART NO.	QUANTITY	UNIT	DATE
1000000000	15	15	01/17/00
1000000000	15	15	01/17/00

UNLESS OTHERWISE SPECIFIED:
 MATERIAL: 1/4" PLATE
 FINISH: GALVALUME
 TOLERANCES: ±.005"
 SURFACE: 16 GA. GALVALUME
 WELDING: 1/4" ELECTRODE
 WELDING: 1/4" ELECTRODE

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CURRY SUPPLY CO. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY CO.


DATE: 01/17/00
 DRAWN BY: 1600-3400 - PODS HARNESS
 WEIGHT: 150 LBS
 SHEET 2 OF 2

Curry Supply Co.


48

[illegible]

BLUE = STROBE LIGHT
RED = WORK LIGHT
BLACK = WORK LIGHT (HEADBOARD)
WHITE = GROUND

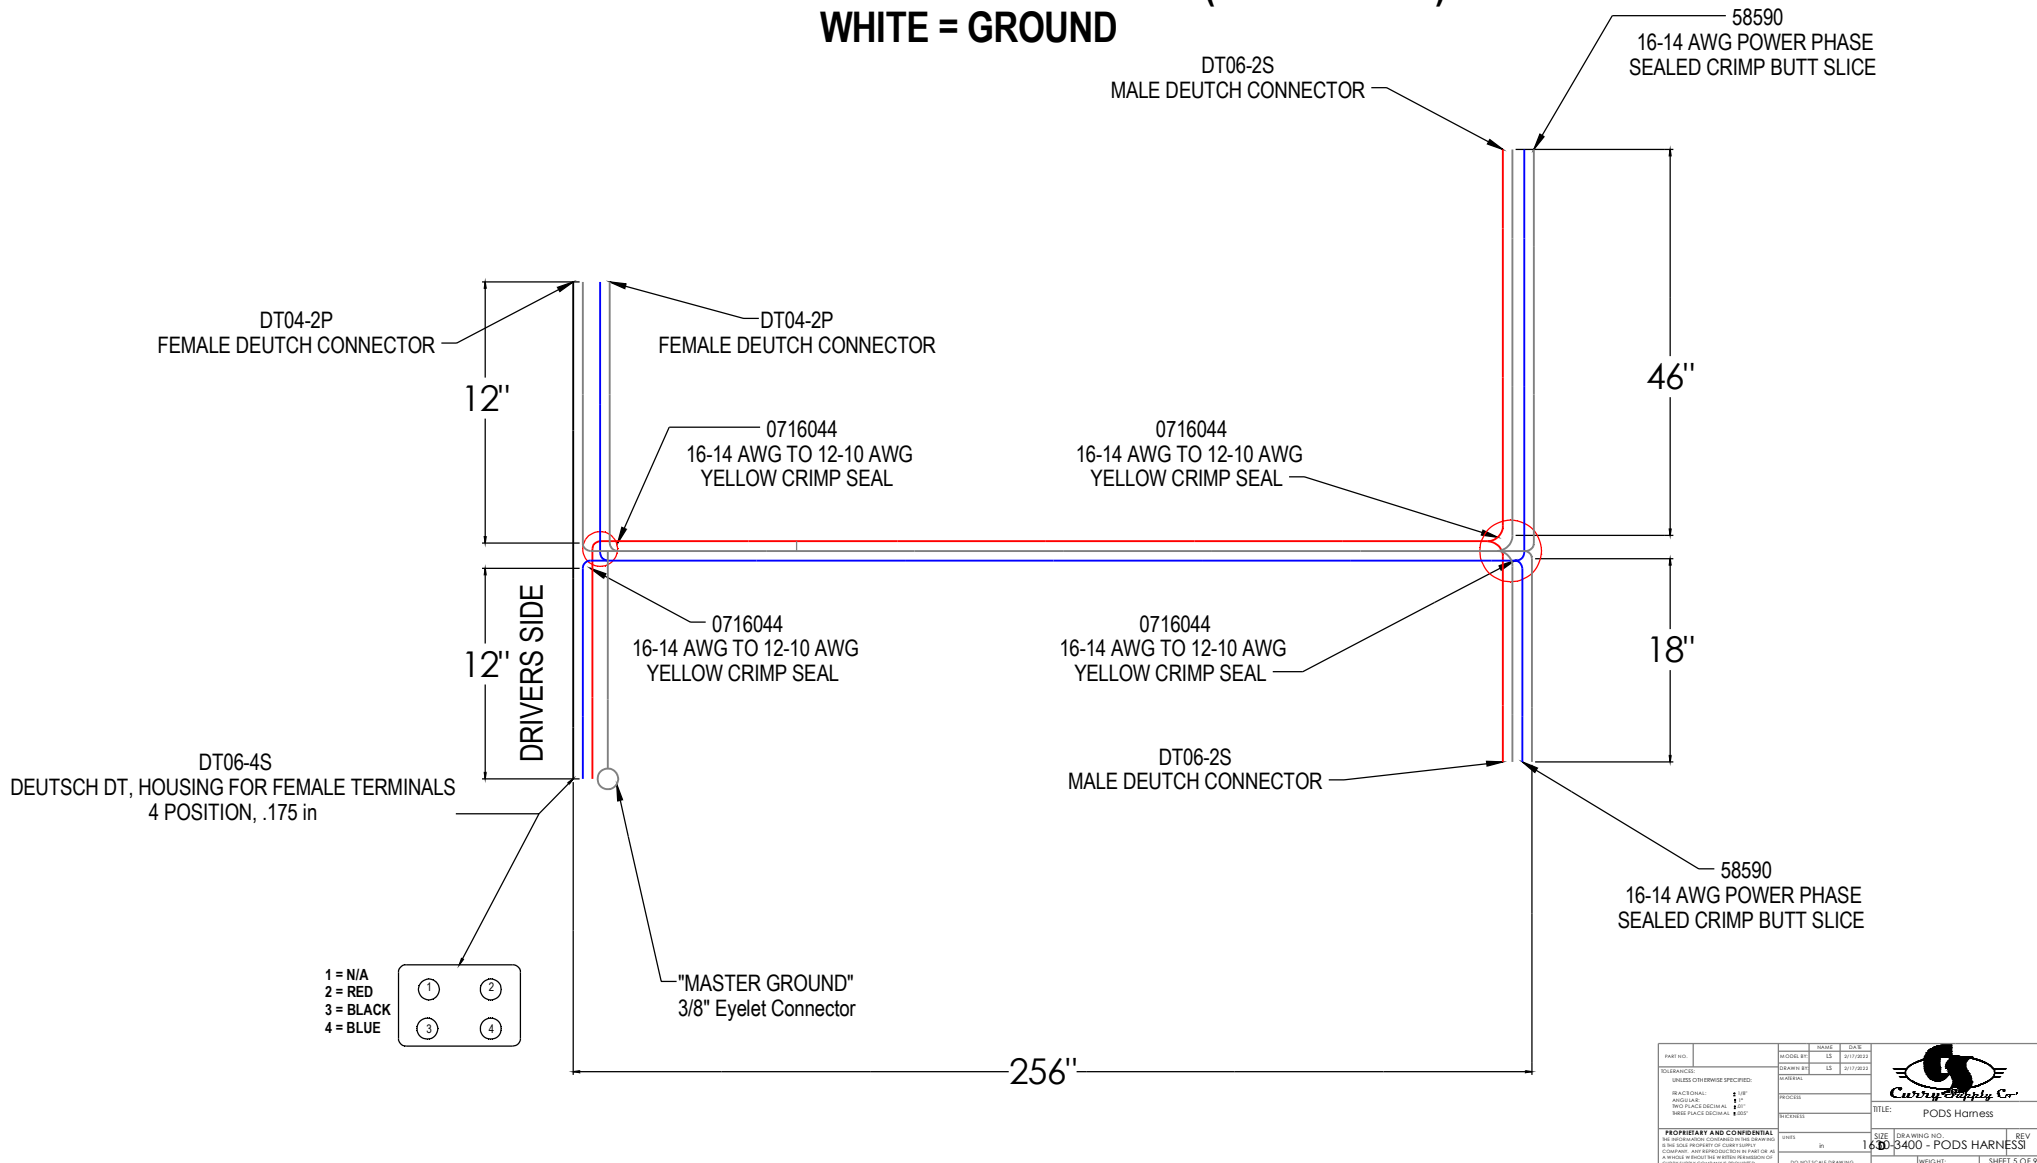


REAR STROBE / WORK LIGHT LAYOUT

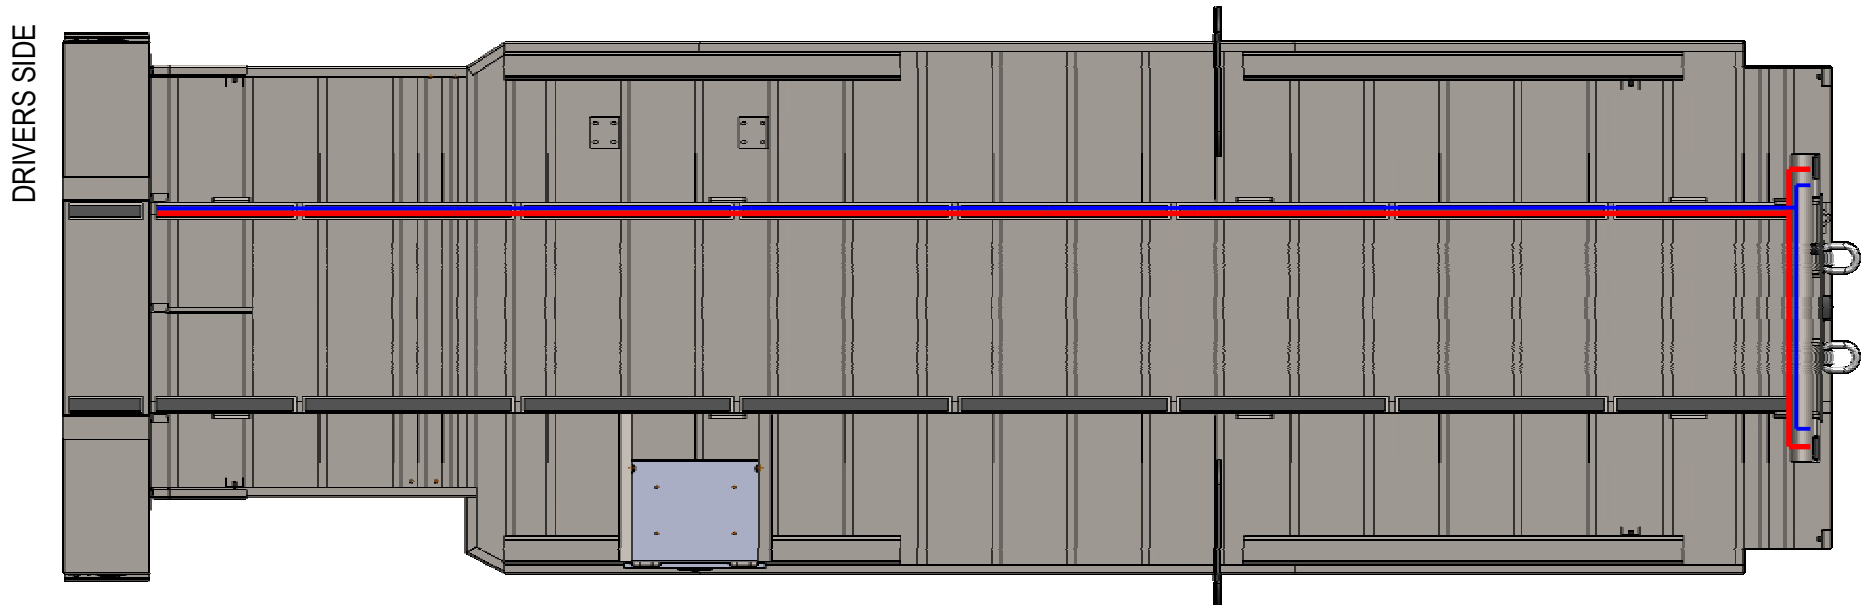

PART NO.	SCALE		DATE	
	MODEL NO.	12	3/17/2023	
EQUIPMENT	DRAWING BY		 Curry Supply Co.	
	DESIGNED BY			
UNLESS OTHERWISE SPECIFIED:				
MATERIALS:				
FINISHES:				
DIMENSIONS:				
TOLERANCES:				
PROPERTIES:				
SPECIFICATIONS:				
OTHER:				
DO NOT SCALE DRAWING				
PROPERTY AND CONFIDENTIAL				
ALL INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CURRY SUPPLY CO. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY & ASSOCIATES.				
CURRY SUPPLY CO.		22' PODS FLATBED		
1600		DRAWING NO. 3400 - PODS HARNESS		
WEIGHT: 18138.54		SHEET 6 OF 9		


**BLUE = STROBE LIGHT
BLACK = WORK LIGHT
WHITE = GROUND**

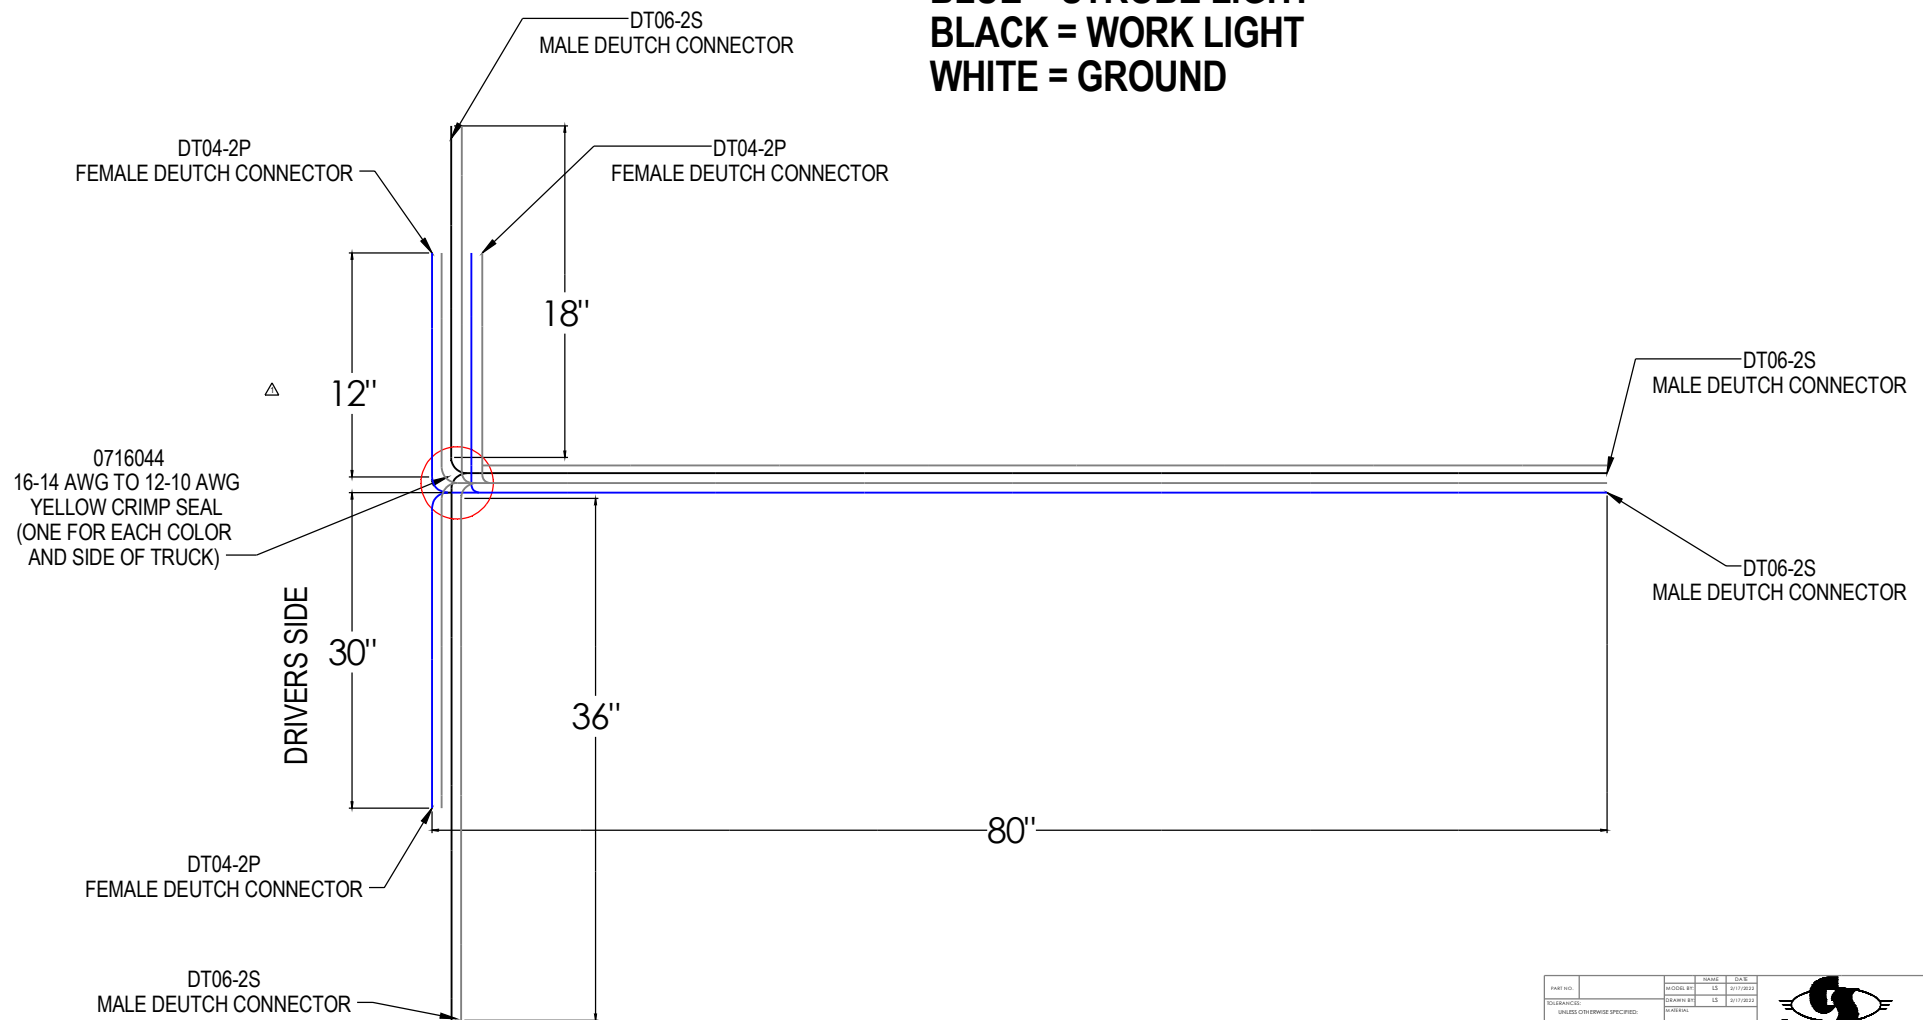

PART NO.	16003400	REV	001
DATE	03/11/2003	BY	03/11/2003
UNLESS OTHERWISE SPECIFIED:			
FINISH:	1/8"	FINISH:	1/8"
WELDING:	1/8"	WELDING:	1/8"
DRILLING:	1/8"	DRILLING:	1/8"
PROPERTY AND CONFIDENTIAL			
THIS DRAWING IS THE PROPERTY OF CURRY SUPPLY CO. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY. INQUIRIES:			
SIZE	1/8"	DRAWING NO.	16003400 - PODS HARNESS
DATE	03/11/2003	REV	001
WEIGHT		SHEET 7 OF 9	

FRONT STROBE / WORK LIGHT LAYOUT


DRIVERS SIDE

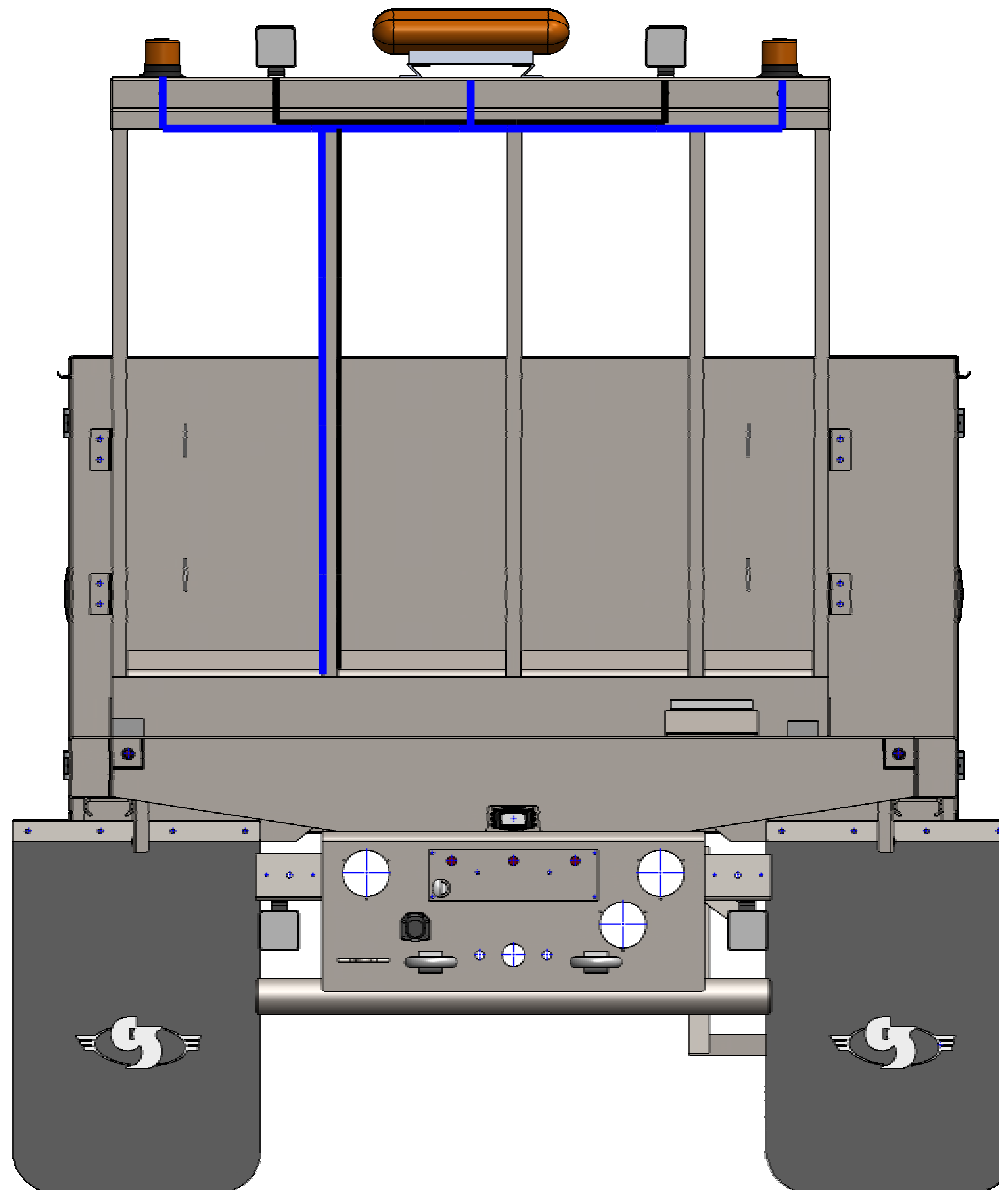

PART NO.	16003400	DATE	03.18
REVISION NO.	02	DATE	07/18/2017
REVISION BY	02	DATE	07/18/2017
REVISION			
UNLESS OTHERWISE SPECIFIED:			
FRAC TIONAL:	1/16"		
ANGULAR:	1/2°		
THIRD PLACE DECIMAL:	1/10"		
THIRD PLACE DECIMAL:	1/10"		
PROPERTY AND CONFIDENTIAL			
ALL INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF CURRY SUPPLY CO. COMPANY. ANY REPRODUCTION BY ANY OTHER AGENCY WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY IS PROHIBITED.			
SIZE	16003400	DRAWING NO.	22' PODS FLATBED
REV	02	REV	02
WEIGHT	18138.94	SHEET	8 OF 9



CHASSIS
HARNESS

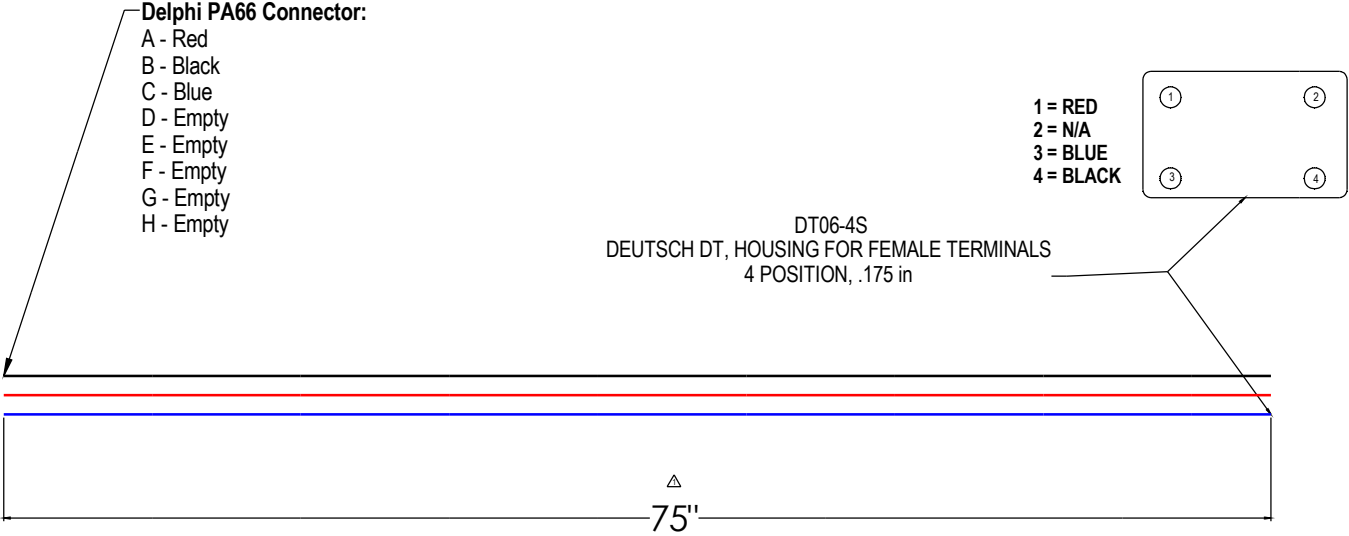

PART NO.	QUANTITY	DATE	BY
100-3400-1	1	10/1/99	10/1/99
REVISIONS	DATE	BY	REASON
1	10/1/99	10/1/99	10/1/99
UNLESS OTHERWISE SPECIFIED:			
FRACTIONAL: 1/16"			
DECIMAL: 1/10"			
TWO PLACE DECIMAL: 1/100"			
THREE PLACE DECIMAL: 1/1000"			
TOLERANCES			
FRACTIONAL: 1/16"			
DECIMAL: 1/10"			
TWO PLACE DECIMAL: 1/100"			
THREE PLACE DECIMAL: 1/1000"			
PROPRIETARY AND CONFIDENTIAL			
THIS DOCUMENT CONTAINS THE DESIGN AND CONSTRUCTION OF CURRY SUPPLY COMPANY. IT IS THE PROPERTY OF CURRY SUPPLY COMPANY. IT IS TO BE KEPT SECRET AND NOT REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CURRY SUPPLY COMPANY. INQUIRIES:			
DO NOT SCALE DRAWINGS			
TITLE:		SIZE:	DATE:
100-3400-1 - PODS HARNESS 1		1/16"	10/1/99
DRAWING NO.		REV	REV
100-3400-1		1	1
WEIGHT:		SHEET 9 OF 9	

